
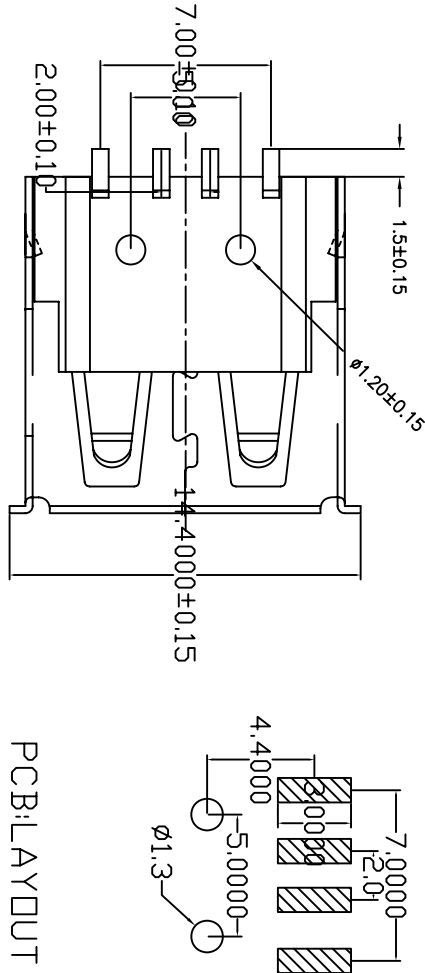


目 录	设 变 内 容	日 期
MAPX	MODIFICATION	DATE

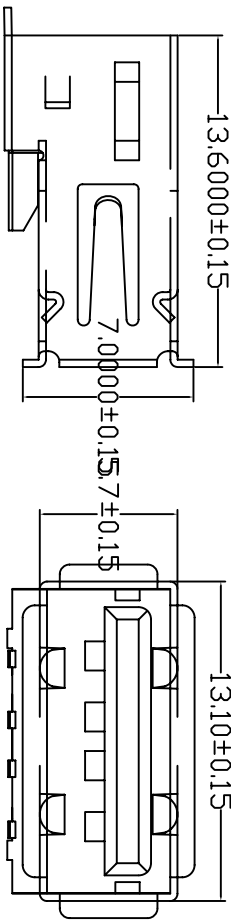

备注：侧弹分为外弹与内弹

NOTES:

Housing: Thermoplastics,UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000MΩ Min.
Contact Resistance:30 MΩ Max.
Dielectric Withstanding Voltage:500W AC
Temperature Range:-35℃ to +85℃
Insulator color: Black/White
Plastic material:PBT/LCP/Others
Shell finish:Nickel plated/Tin-Lead plated
Mechanical:
Mating Force:3.5KG MAX
Umating Force:0.7 KG MIN.
Contact finish:

- 01: Selective Gold Flash
- 02: Selective Gold 3U”
- 03: Selective Gold 5U”
- 04: Selective Gold 15U”
- 05: Selective Gold 30U”

产 品 图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

公差一览表	单位	MM	制图	Z-Y-B	产品料号
X ±0.25	UNITS		DRAWING		PRODUCT PART NO.
X ±0.20	比例	1 : 1	审核		产品名称
XX ±0.15	SCALE		核准		角法
XXX ±0.10	日期	2009/10/20	核准		VER
	DATE		APPD		