
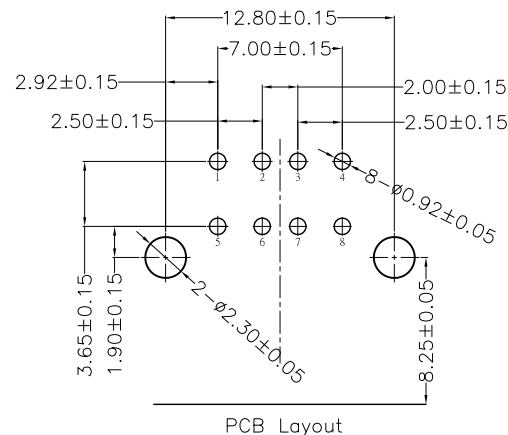
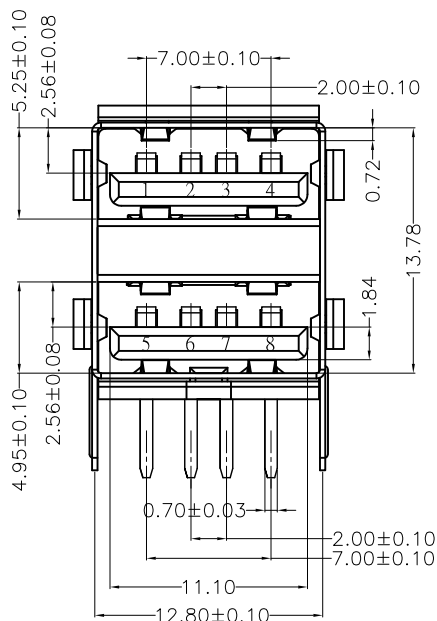
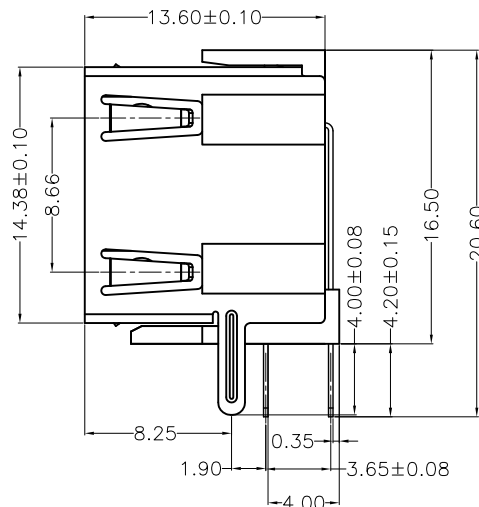


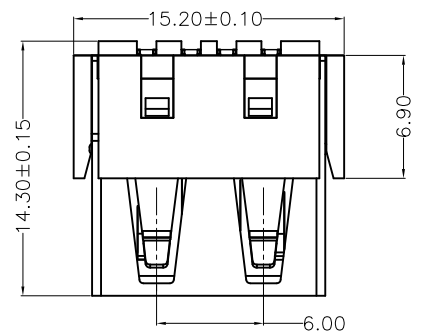

NOTES:

1. HOUSING: SEE NOTES.
2. TERMINAL: SEE NOTES.
3. SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
3. Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

UNIT	MM	DRAWING	Z-Y-B	PRODUCT PART NO.
X	±0.25	X	±5.°	
.X	±0.20	.X	±2.°	
.XX	±0.15	.XX	±1.°	
.XXX	±0.10	.XXX	±0.5°	

单位	MM	制图	Z-Y-B	制图料号
UNITS	MM	DRAWING	Z-Y-B	PRODUCT PART NO.

比例	1:1	审核		产品名称
SCALE	1:1	CHKD		PRODUCT NO.

日期	2014.05.06	核准		角法
DATE	2014.05.06	APPD		VIEW

版本	A0
VER	A0

角法	角法
VIEW	VIEW

版本	A0
VER	A0

角法	角法
VIEW	VIEW

角法	角法
VIEW	VIEW

角法	角法
VIEW	VIEW

角法	角法
VIEW	VIEW