
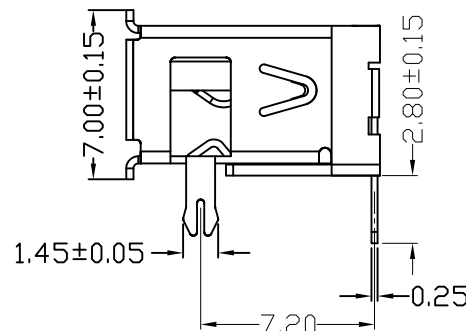
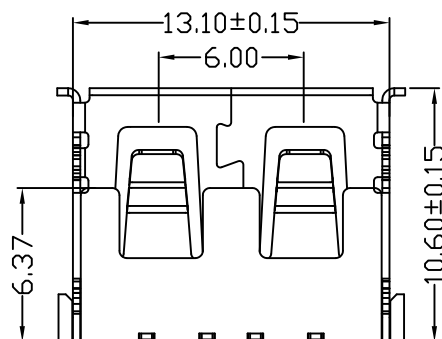
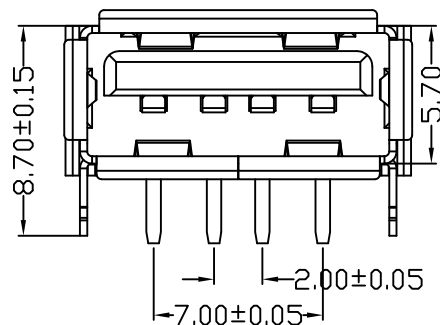


# D款，正向10.6前两脚, DIP-\*6.20

MAPX

MODIFICATION

DATE

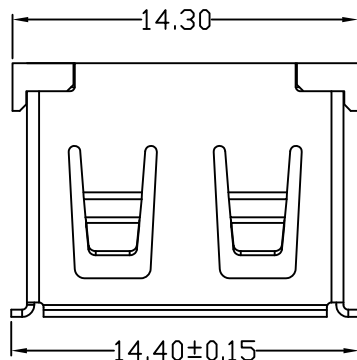

## NOTES:

- 1.HOUSING: SEE NOTES, UL94V-0 .  
TERMINAL: SEE NOTES.  
SHELL: SEE NOTES.

## SPECIFICATION:


- 1.ELECTRICAL CHARACTERISTIC:  
CONTACT RESISTANCE: 30MΩ MAX  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN  
INSULATION RESISTANCE: 1000MΩ MIN
- 2.MECHANICAL CHARACTERISTIC:  
INSERTION FORCE: 35N(3.57KGF) MAX  
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN  
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N  
5000 CYCLES MIN  
5000 CYCLES EXTRACTION FORCE:3~35N

## 3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

## 4.Contact finish:

- 01:Selective Gold Flash
- 02:Selective Gold 3U"
- 03:Selective Gold 5U"
- 04:Selective Gold 15U"
- 05:Selective Gold 30U"

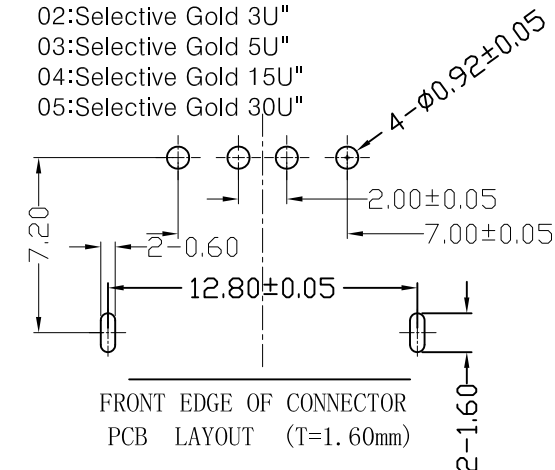

FRONT EDGE OF CONNECTOR  
PCB LAYOUT (T=1.60mm)

## 产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

| X.   | ±0.25 | X.   | ±5°   |
|------|-------|------|-------|
| .X   | ±0.20 | .X   | ±2°   |
| .XX  | ±0.15 | .XX  | ±1°   |
| .XXX | ±0.10 | .XXX | ±0.5° |

| 单位<br>UNITS | MM         | 制图<br>DRAWING | Z-Y-B | 制图料号<br>PRODUCT PART NO. | JTJ-USB-10.6-001        |
|-------------|------------|---------------|-------|--------------------------|-------------------------|
| 比例<br>SCALE | 1:1        | 审核<br>CHKD    |       | 产品名称<br>PRODUCT NAME     | USB A/F 10.6有边前两脚鱼叉(方弹) |
| 日期<br>DATE  | 2012.09.24 | 核准<br>APPD    |       | 角法<br>VIEW               | 版本<br>VER               |
|             |            |               |       |                          | AD                      |