


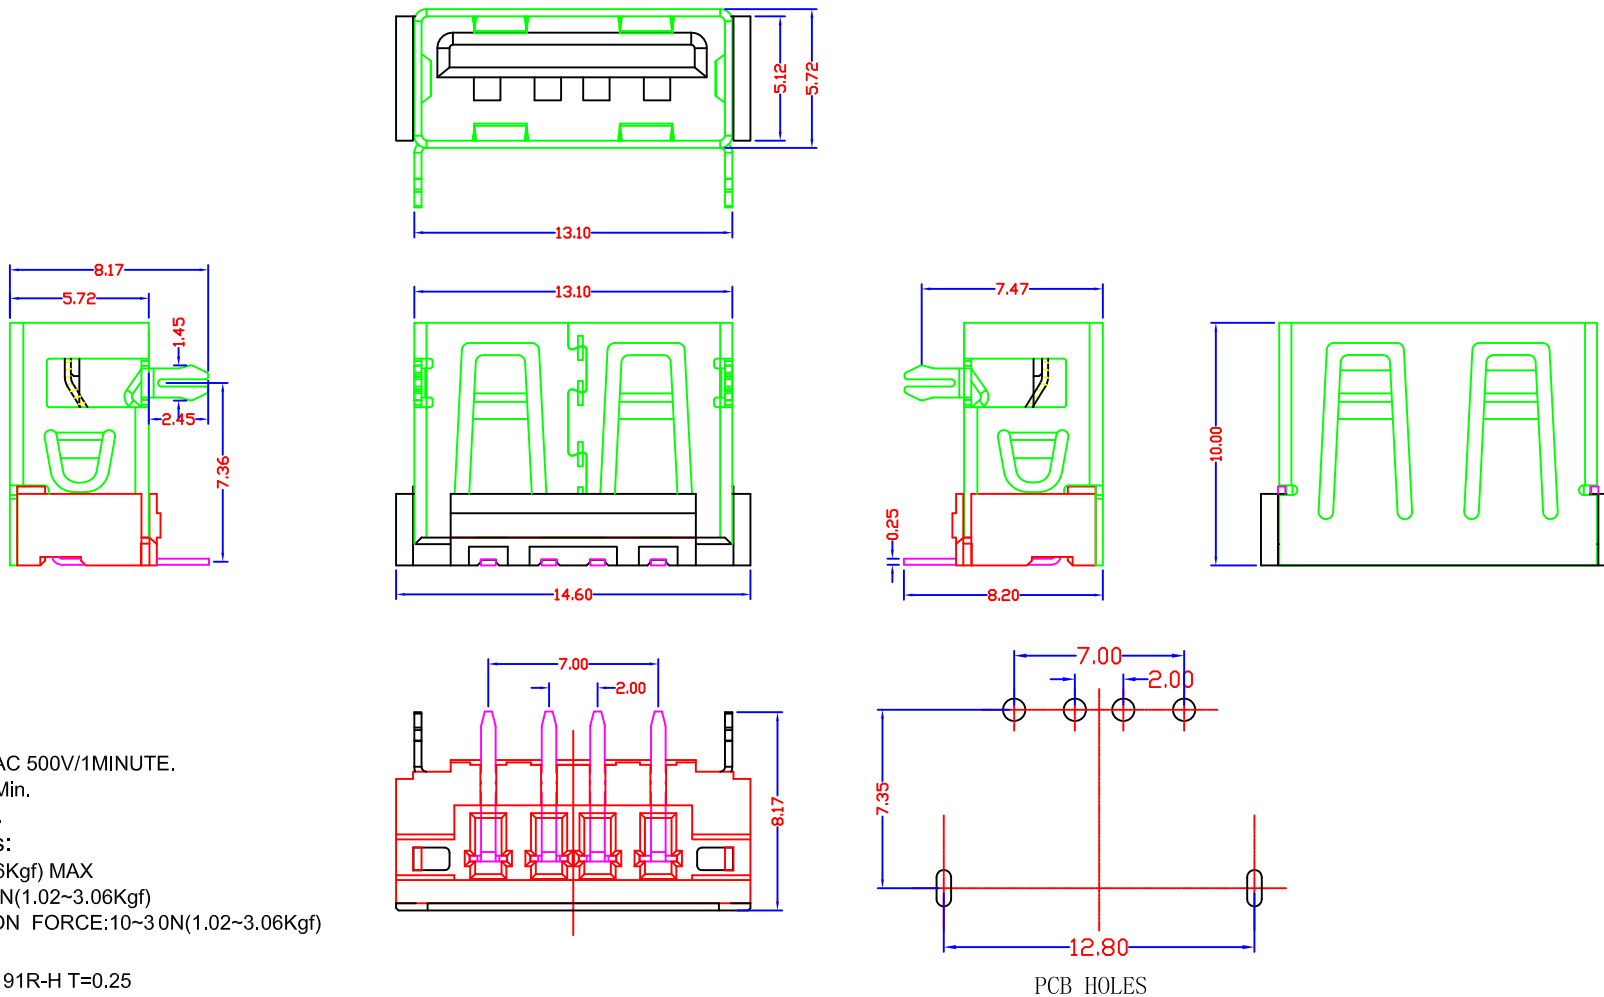

Specification:

1.Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.

Insulation Resistance: 1000 MΩ/Min.

Contact Resistance: 30 mΩ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX

EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: Phosphor Bronze, C5191R-H T=0.25

Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;

Shell: Phosphor Bronze, C5191R-H T=0.30mm

Plating: Nickel underplate 2.54 um Min;

Housing: 无卤LCP Black; UL94V-0

4.Environmental:

Operating Temperature: 0°C to +85°C.

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.15	X.	±5°
.X	±0.10	.X	±2°
.XX	±0.05	.XX	±1°
.XXX	±0.03	.XXX	±0.5°

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NAME	USB A/F 90° 两脚 短体
日期 DATE	2011.09.02	核准 APPD		角法 VIEW	版本 VER
					AD