
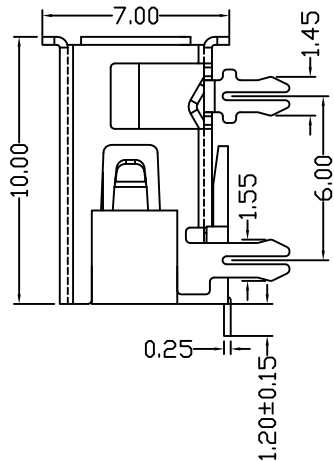


MAPX	MODIFICATION	DATE

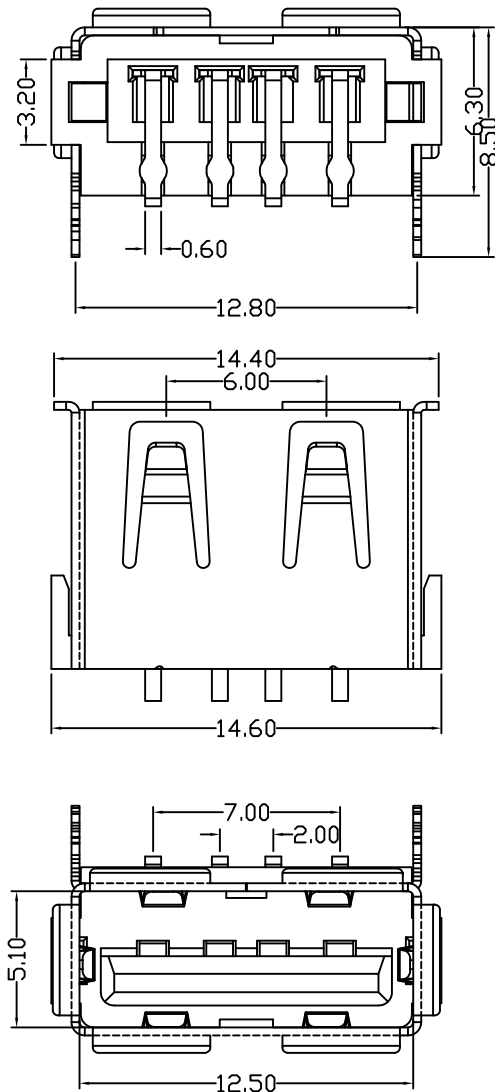

Specification:

1. Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.

Insulation Resistance: 1000 MΩ/Min.

Contact Resistance: 30 mΩ\ Max.

2. Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX

EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

Durability: 1500cycles. EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

3. Material:

Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25

Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;


Shell: Bronze, C2680R-H =0.30mm

Plating: Nickel underplate 2.54 um Min;

Housing: LCP Black

4. Environmental:

Operating Temperature: 0°C to +85°C.

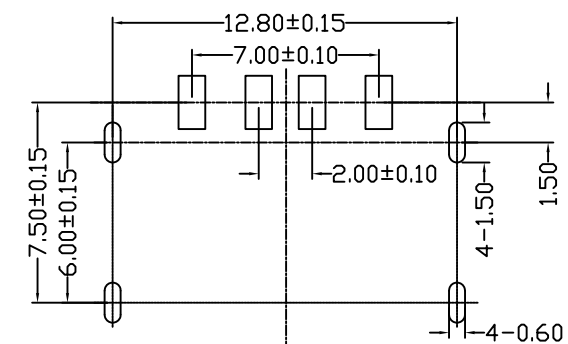

RECOMMENDED P.C.B LAYOUT

SMT/胶芯T=6.00

产品图 PRODUCT CHART DWG					
公差一览表 TOLERANCE UNLESS OTHERWISE					
X.	±0.30	X.	±5°	单位 UNITS	MM
.X	±0.25	.X	±2°	比例 SCALE	1:1
.XX	±0.15	.XX	±1°	日期 DATE	2012.04.1
.XXX	±0.10	.XXX	±0.5°	制图 DRAWING	Z-Y-B
				制图料号 PRODUCT PART NO.	JTJ-USB-A/F-10.0-019
				产品名称 PRODUCT NAME	USB A/F SMT 短体四脚有缺口
				角法 VIEW	版本 VER
					AD