
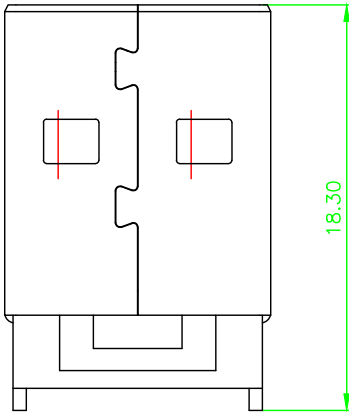
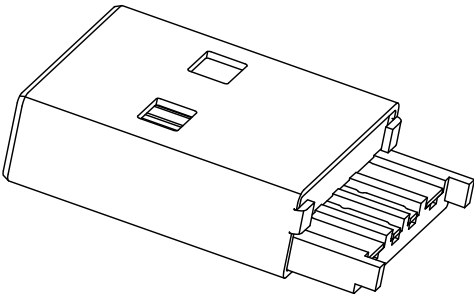



RoHS

REVISIONS

SYM	ECN No.	MODIFICATION	DATE	ISSUED

- Note:
- 1.Material:
- 1.1,Housing: High temperature thermoplastic with/black g.f,UL94v-0
- 1.2,Contact: copper alloy,t=0.25mm
- 1.3,Shell: copper/Ferroalloy alloy,t=0.35mm
- 2.Specification:
- 2.1,Current rating:3A Max.
- 2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3,Contact resistance: 30 mΩ Max.
- 2.4,Insulation resistance: 100 MΩ Min.
- 2.5,Total mating force: 3.57 Kgf Max.
- 2.6,Total unmating force: 1.0 Kgf Min.
- 3.Finish:
- 3.1,Contact: Plated Golg in Mating Area:
Tin On Solder Talls
Shell: Nickel Plating
- 4.Environmental:
- 4.1,Temperature range: -55°C~85°C

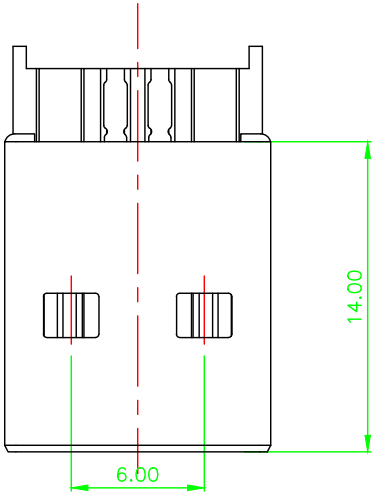

DRAWN		JTY 深圳市精拓金电子有限公司						
CHECKED		TITLE USB AM 大电流焊线式 一件式			PART NO. --			
APPROVED					DRAWING NO. --			
 3rd ANGLE PROJECTION	UNIT	TOLERANCE .XXX±.10, .XX±.15, .X±.25, ANG±1°			SCALE	SHEET	SIZE	REV.
	mm				1:1	1 OF 1	A4	X1