

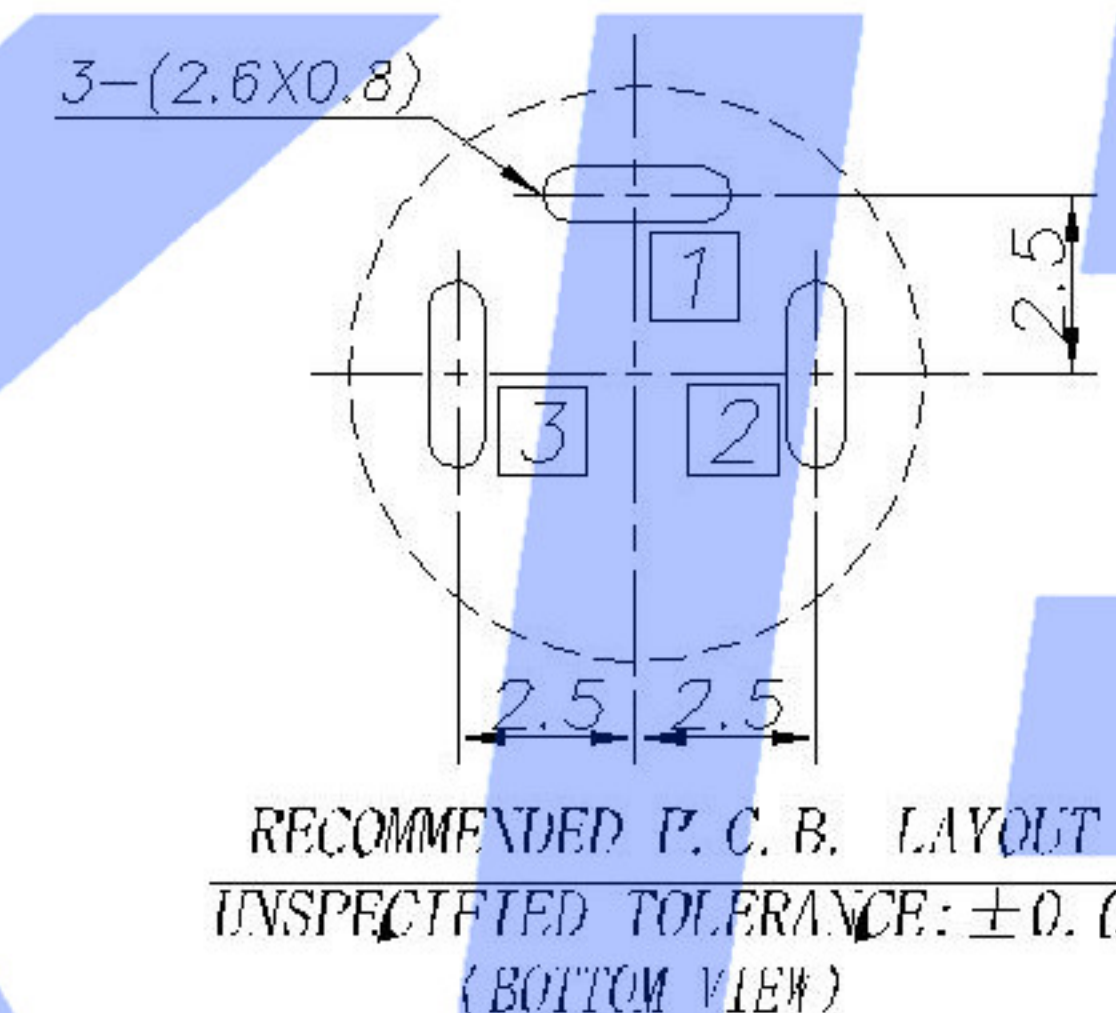


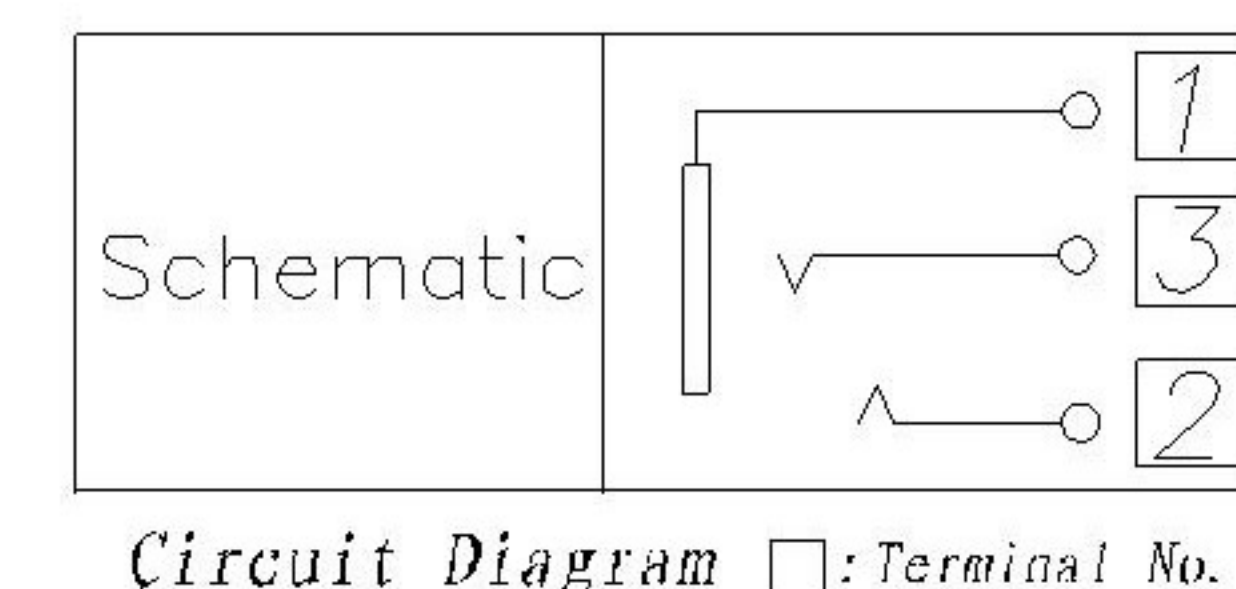

CODE	PLATING
_B	Bushing & Nut (Ni Plated) Terminal (Ag Plated)
_D	Bushing & Nut (Ni Plated) Terminal (Au Plated)
_F	Bushing & Nut (Au Plated) Terminal (Au Plated)

Specification:

1. Rating : DC 30V 0.5A.
2. Contact resistance: $\leq 30\text{m}\Omega$.
After test: $\leq 50\text{m}\Omega$.
3. Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC).
After test: $\geq 50\text{M}\Omega$.
4. Withstanding voltage: 500VAC.
5. Insertion and extraction force: 3N~30N.
6. life test: 5000cycles min.
7. Operation temperature range: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.
8. Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
9. Sign"▲" is importance dimension.

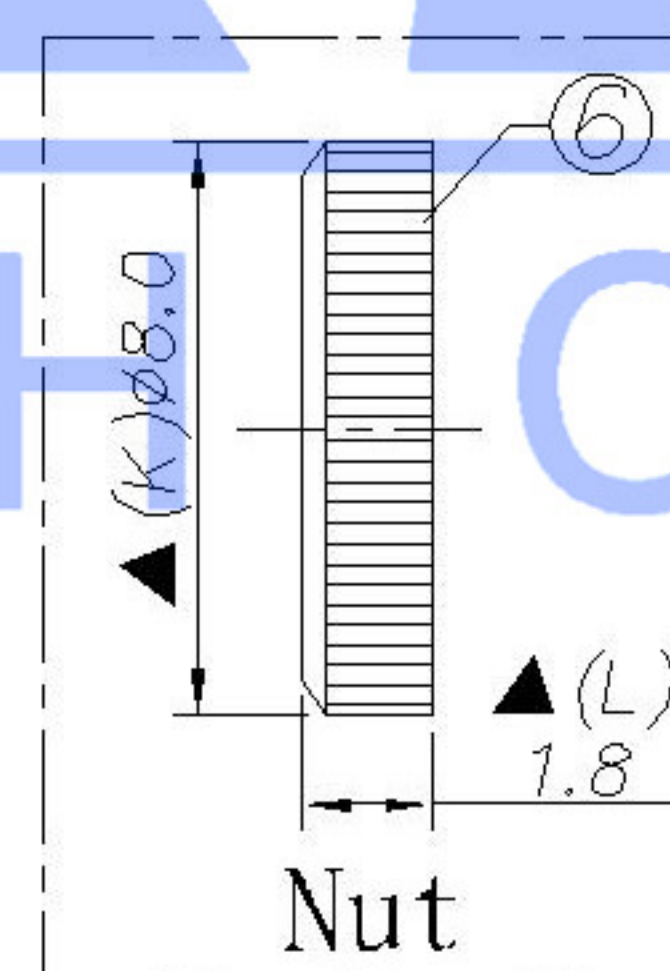

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Pbt	

							DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK			
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:			
△ X					X.X	±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.: PJ-392W-X			
△ X					X.XX	±0.1mm	APPD		DATE		SIZE: A4				
△ X					X.XXX	±0.05mm									
MARK	DESCRIPTION		DATE	REVISED	APPROVED										
REVISIONS						UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													1.0g	1/1	A0