
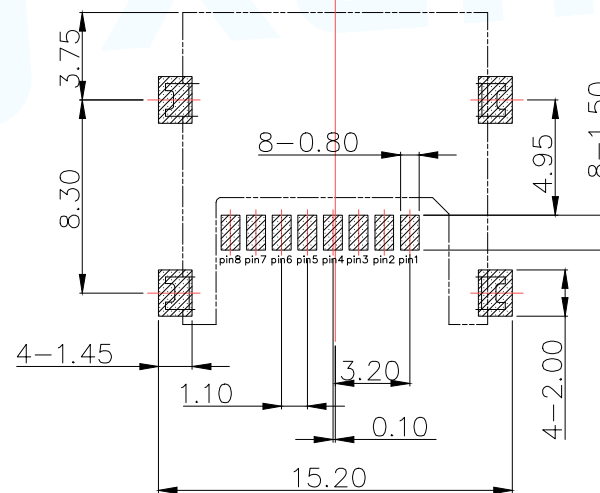
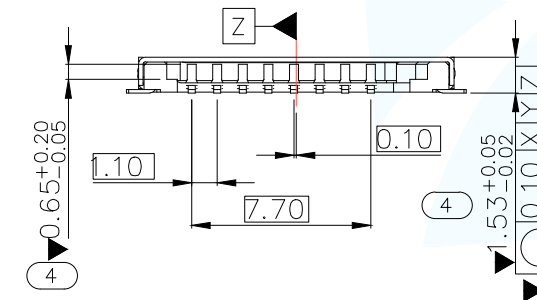
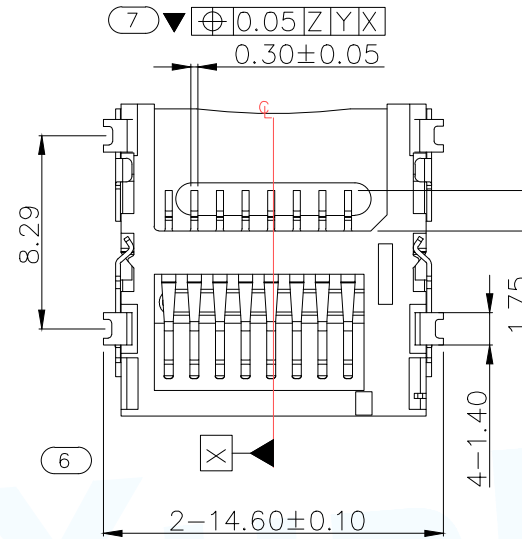


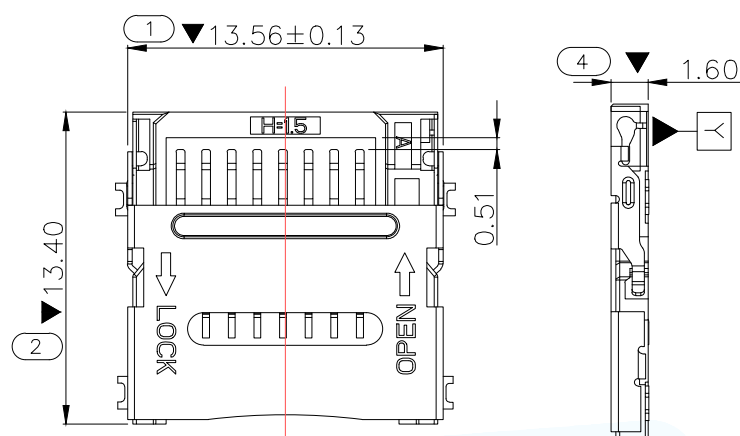

PAD AREA
KEEP OUT AREA

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05


NOTE:

1.FINISH:

1-1.CONTACT: AU 1U" PLATING ON CONTACT AREA,
100~200U" SN PLATING ON SOLDER TAILS,
50U" NICKEL UNDERPLATING VOER ALL;


2.PRODUCT SPECIFICATIONS:

2-1.VOLTAGE RATING: 100V
2-2.CURRENT RATING: 0.5A
2-3.INSULATION RESISTANCE: 1000 MEG.OHM MIN
2-4.CONTACT RESISTANCE: 100 MILL.OHM MAX
2-5.OPERATION TEMPERATURE: -20° TO +85°

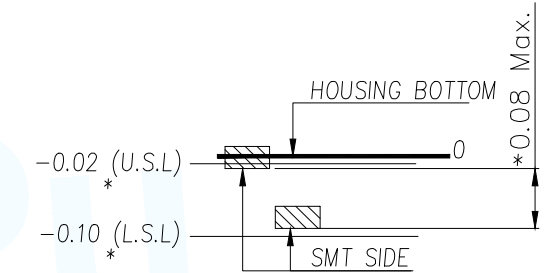

COPLANARITY(Shell&Signal pin)

TF CARD PIN DEFINE			
PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

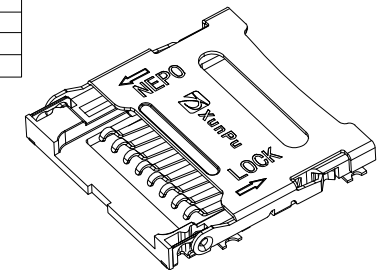

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: T-FLASH CARD HINGED H1.5 兼盖T卡	
DECIMALS:	ANGLES:	PAR	TF-102-15
X.: ±0.50	X.: ±2°	DWN	YAO
X.X: ±0.30	X.X: ±1°	CHKD	
X.XX: ±0.20	X.XX: ±0.5°	APVD	
CUSTOMER COPY		SCALE: 1:1	UNIT: MM
		SIZE: A4	SHEET: 1F1
			REV: A