
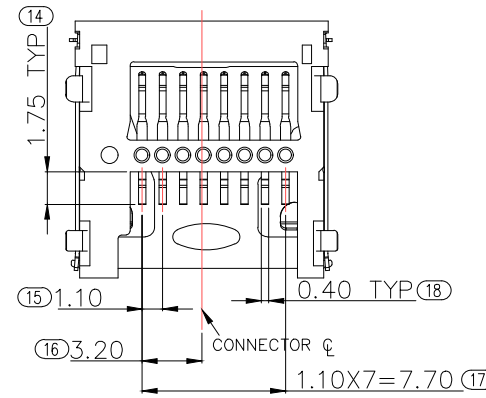
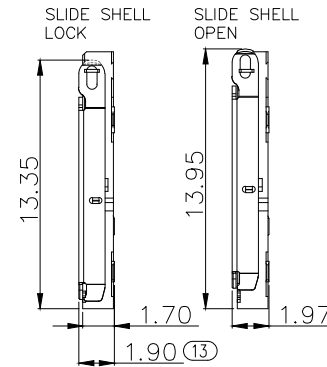
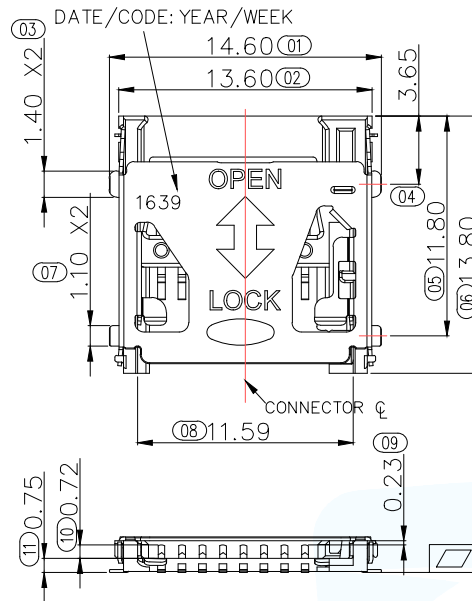
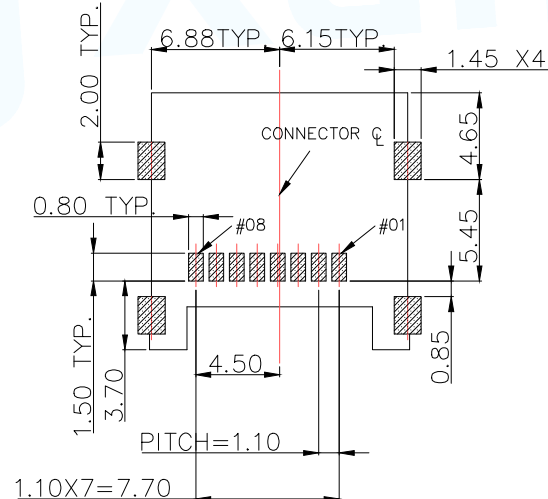


NOTES:




1. MATERIAL:
INSULATOR: HIGH TEMPERATURE THERMO PLASTIC
FLAMMABILITY RATING: UL94V-0 COLOR: BLACK
CONTACT: COPPER ALLOYS
COVER: STAINLESS STEEL
2. CONTACT AREA PLATING: GOLD OVER NI
3. SOLDER TAIL COPLANARITY MUST BE WITHIN 0.10MAX.

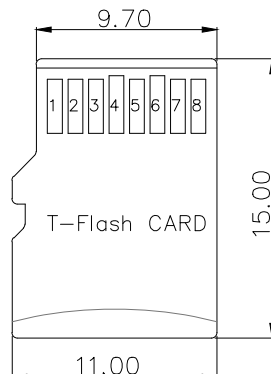

▨ PAD AREA
■ KEEP OUT AREA

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

TF CARD PIN DEFINE			
PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE (BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN (BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLK	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE (BIT0)
8	DAT1	I/O/PP	DATE LINE (BIT1)

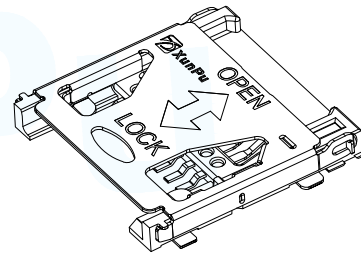

MANUFACTURE DWG			东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES				TITLE: T-FLASH CARD HINGED 掀盖T卡	
DECIMALS:	ANGLES:	PAR		TF-103	
.X: ±0.30	X.*: ±2°	DWN		Allen	
.XX: ±0.20	X.X': ±1°	CHKD			
.XXX: ±0.10		APVD			
		CUSTOMER COPY	SCALE1:1	UNIT: MM	
			SIZE: A4	SHEET: 1F1	REV: A