



CUSTOMER DRAWING

①②③④ CONN. NMWP06M

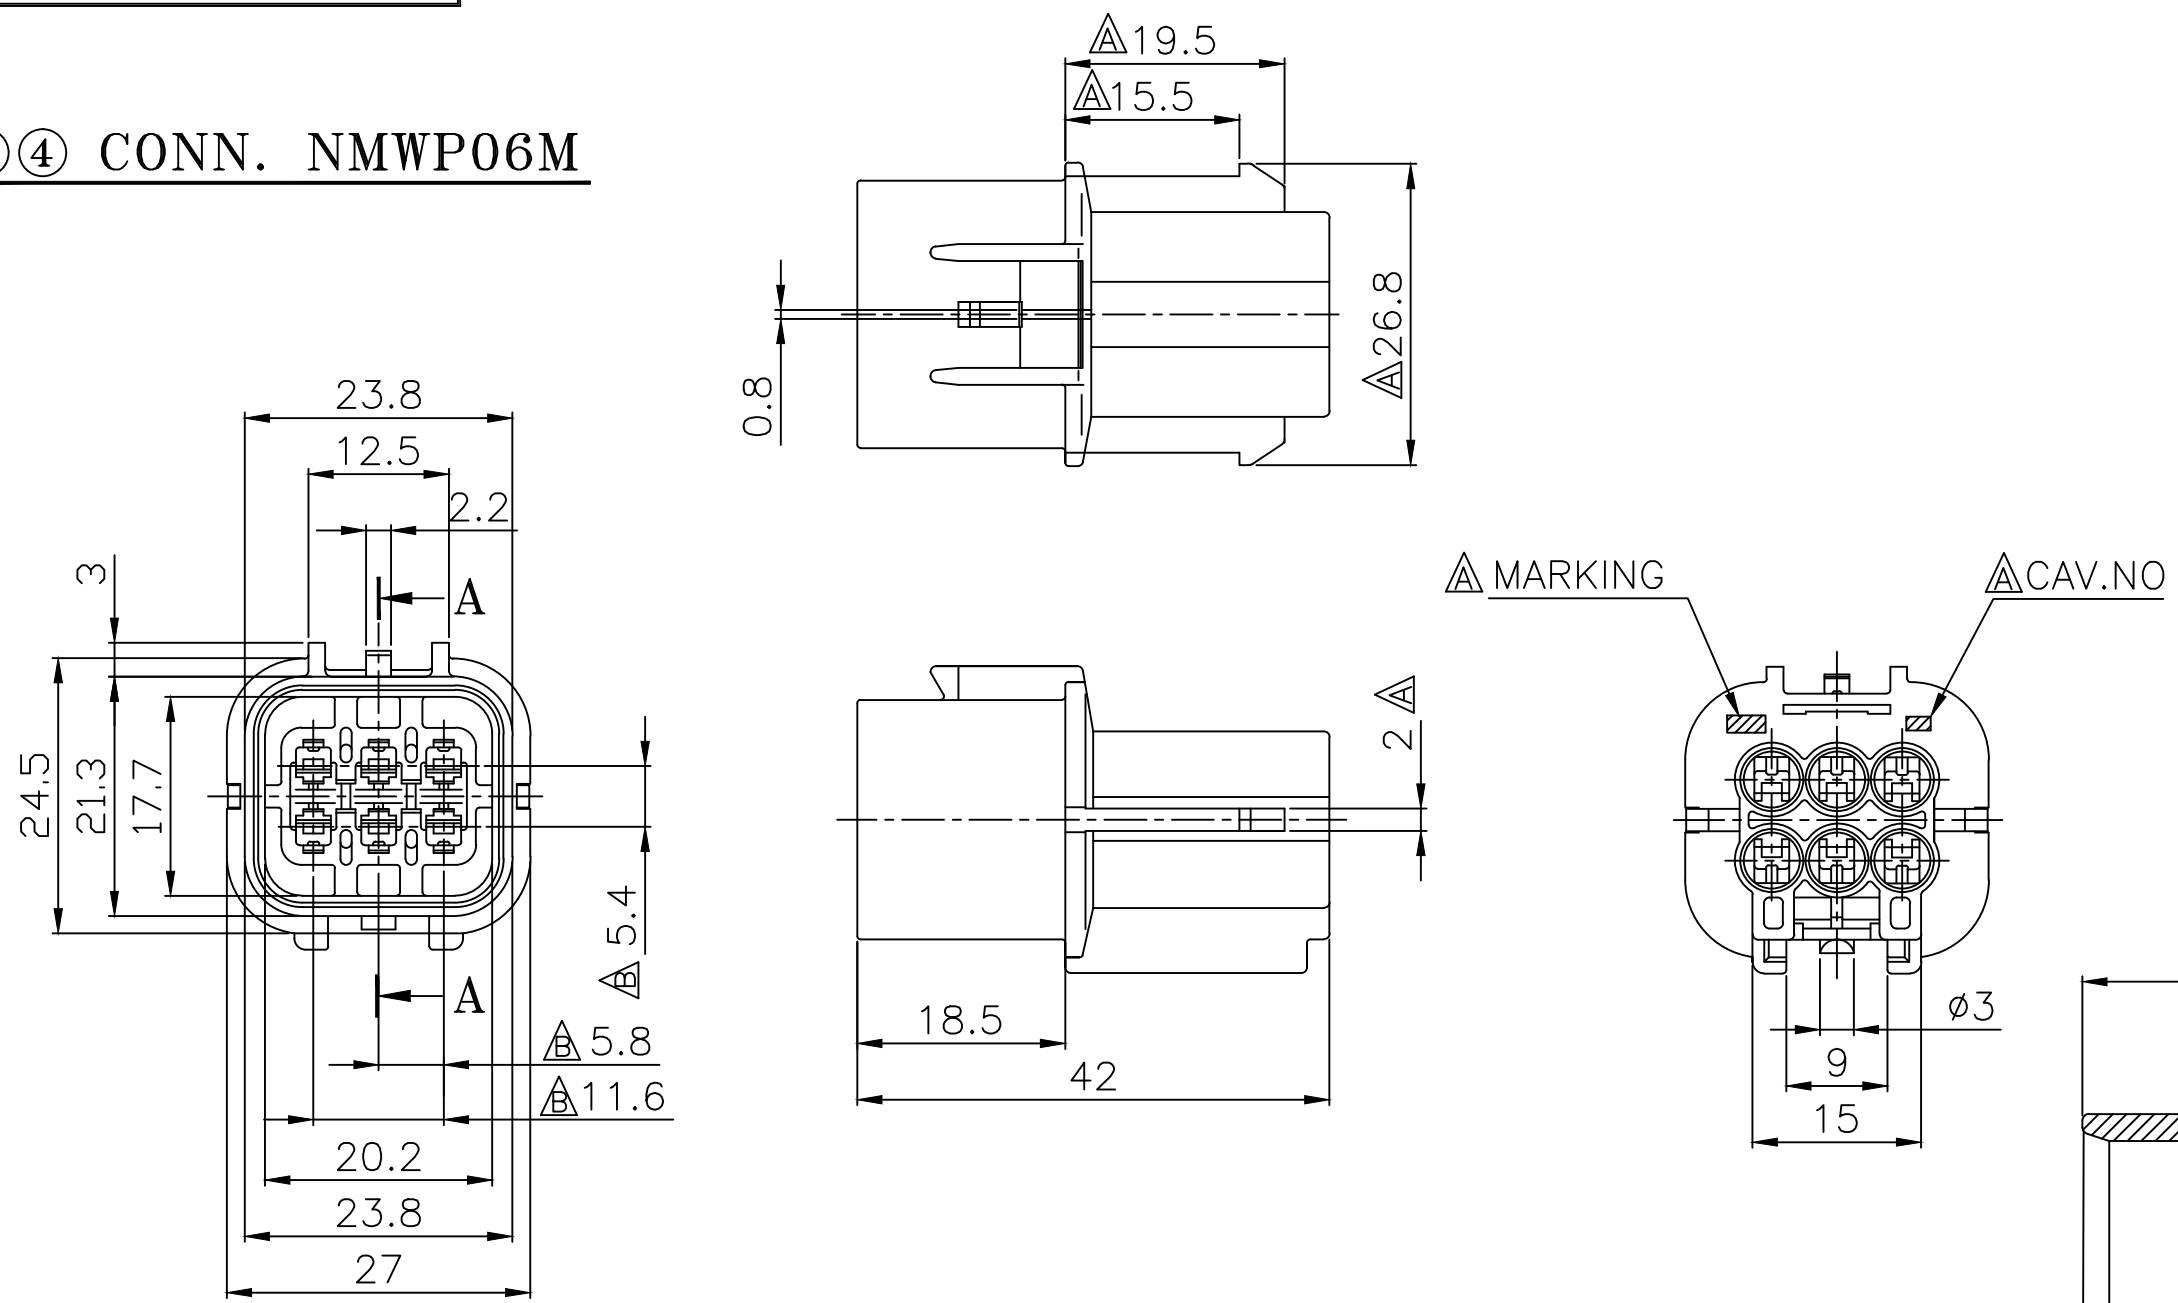

⑤ F/H NMWP06M

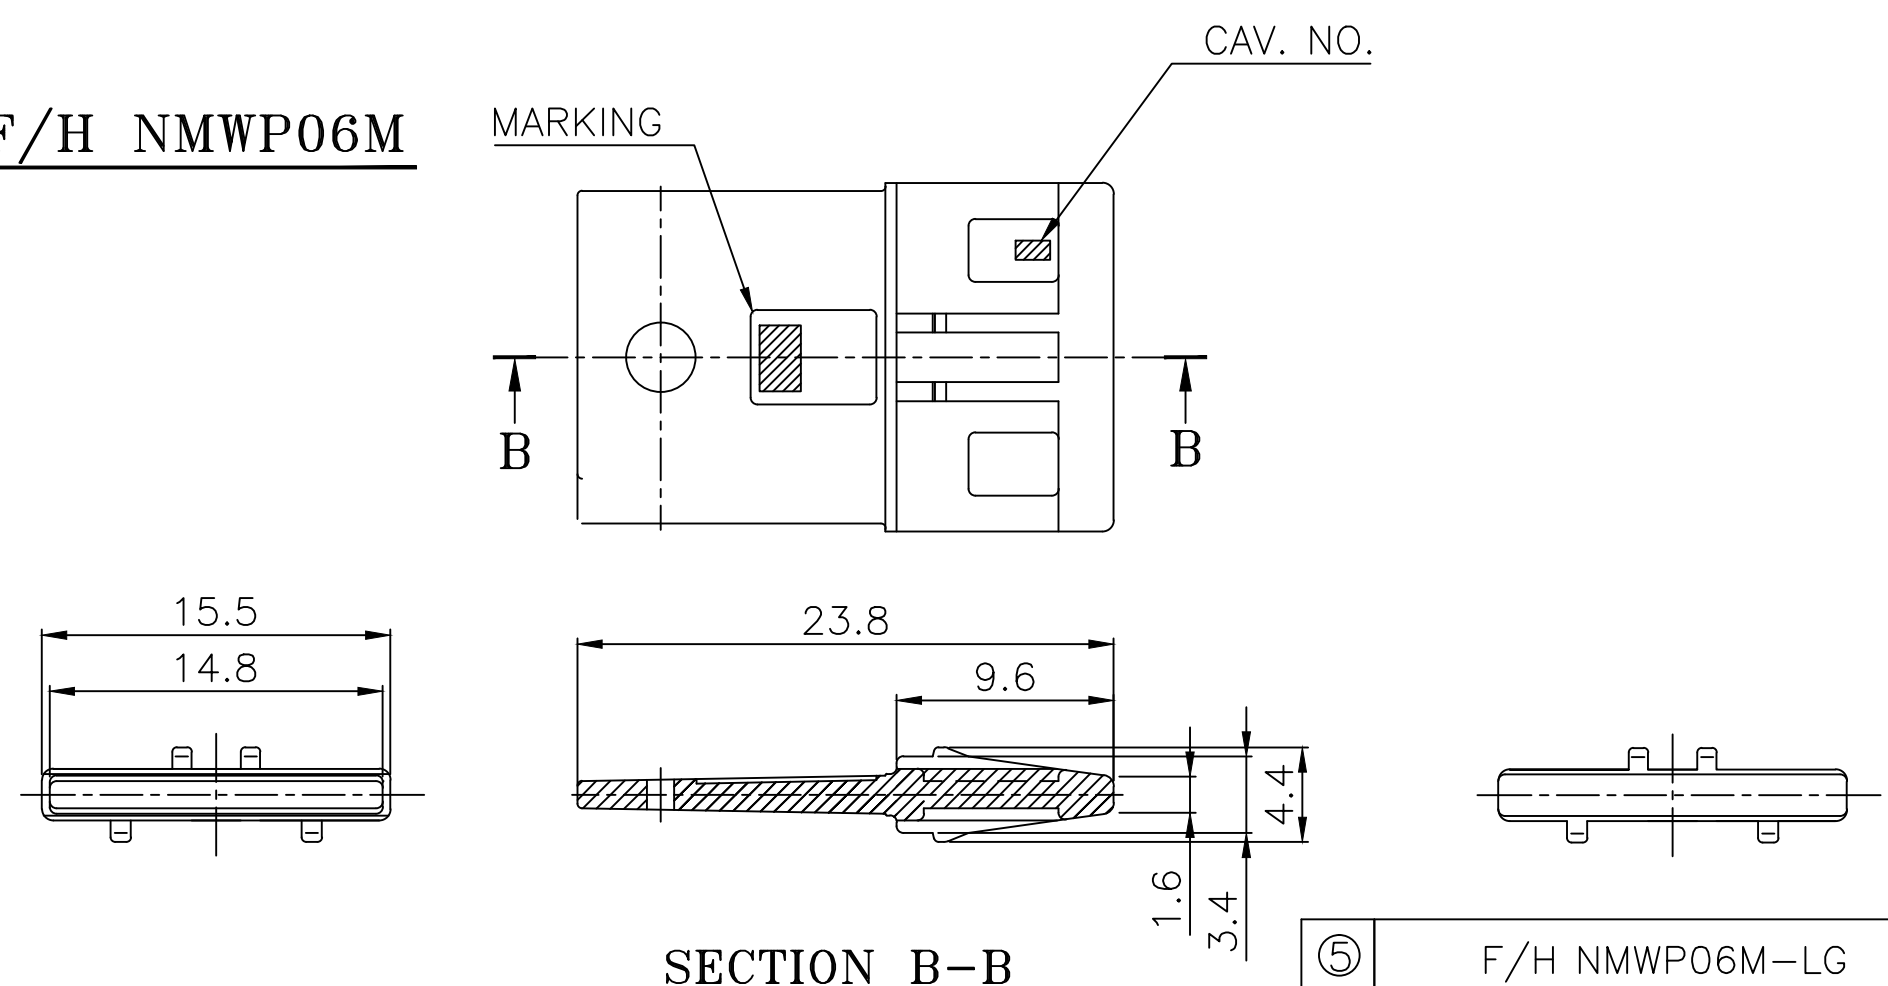


- 주 기 —
- MARKING 및 CAV. NO는 당사 규정에 의하여 각인 할 것.
  - 상대 MATCHING CONNECTOR : NMWP CONN. RECEPT.
  - ASSY 부품
    - FRONT HOLDER : PB871-06880
    - TERMINAL

| 적용 전선(SQ)                                                     | PART NAME    | PART NO.    |
|---------------------------------------------------------------|--------------|-------------|
| AV,AVS,AVSS 0.3~0.5 / AVX,AEX 0.5                             | NMWP-M-S     | MT091-63080 |
| AV,AVX,AEX,AVS,AVSS 0.75~0.85sq, AESX 0.75~0.85sq, 테프론 0.61sq | NMWP-M-SM    | TN021-00200 |
| AV,AVX,AEX,AVS,AVSS 1.25sq~2.0sq                              | NMWP-M-M     | MT091-63280 |
| AV,AVS,AVSS 0.3~0.5 / AVX,AEX0.5                              | NMWP-M-S-Au  | MT091-63060 |
| AV,AVX,AEX,AVS,AVSS 0.75~0.85sq, AESX 0.75~0.85sq, 테프론 0.61sq | NMWP-M-SM-Au | TN021-00210 |
| AV,AVX,AEX,AVS,AVSS 1.25sq~2.0sq                              | NMWP-M-M-Au  | MT091-63260 |

| 적용 전선(SQ)                                                  | PART NAME     | PART No.    |
|------------------------------------------------------------|---------------|-------------|
| AV,AVS 0.3 / AVSS 0.3~0.85sq, AESX 0.75~0.85sq, 테프론 0.61sq | W/S MWP-0.3   | RS220-01100 |
| AV 0.5,AVSS1.25 /AVS,AVX,AEX0.5~0.85                       | W/S MWP-SS    | RS220-04100 |
| AV 0.75~0.85, AVS 1.25                                     | W/S MWP-S     | RS220-02100 |
| AVS,AVSS 2.0 /AV,AVX,AEX 1.25~2.0                          | W/S MWP-W     | RS220-03100 |
| 맥롬SEAL용 PIN                                                | NMWP S/P ASSY | PZ001-15022 |

4. 본 부품은 방수형 CONNECTOR임.

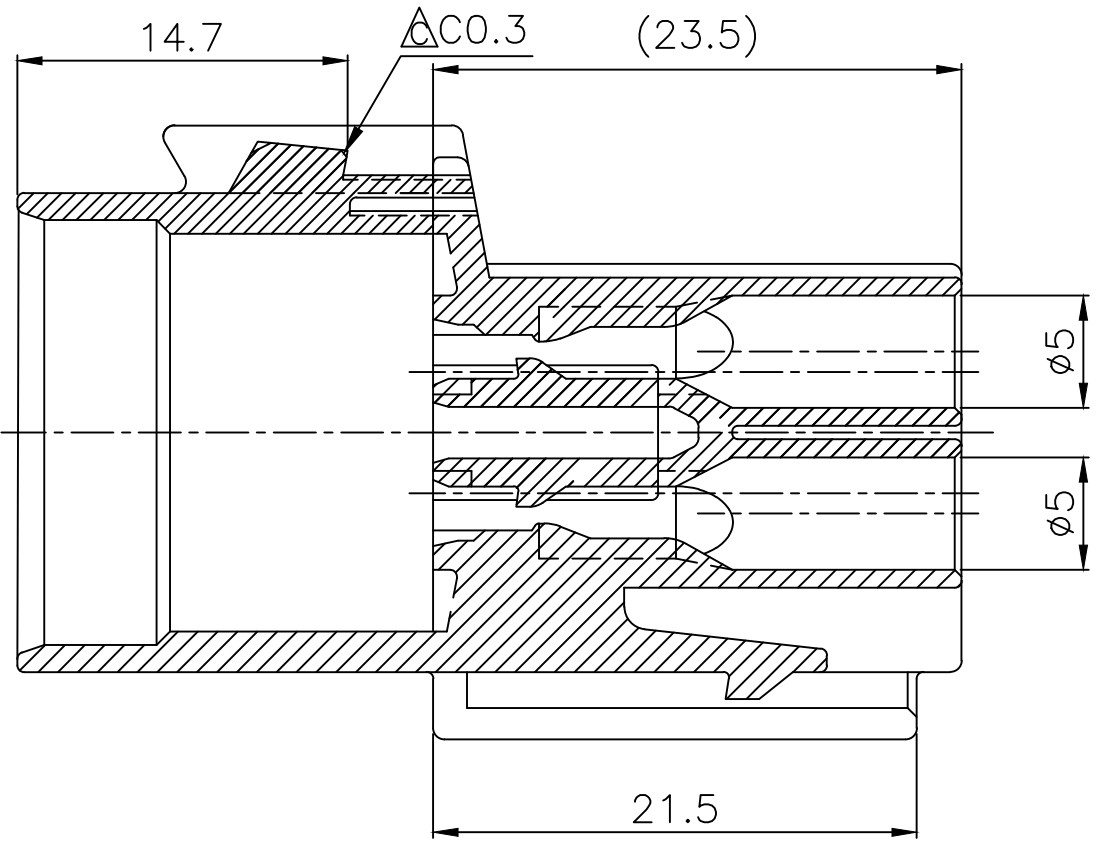

SECTION A-A(2/1)

SECTION B-B

|     |                        |             |             |          |
|-----|------------------------|-------------|-------------|----------|
| ⑤   | F/H NMWP06M-LG         | PB871-06880 | LIGHT GREEN | PBT      |
| ④   | CONN. NMWP06M-B-GY     | PB621-06720 | GRAY        | PBT      |
| ③   | CONN. NMWP06M-B-BR     | PB621-06650 | BROWN       | PBT      |
| ②   | CONN. NMWP06M-B-L      | PB621-06640 | BLUE        | PBT      |
| ①   | CONN. NMWP06M-B        | PB621-06020 | BLACK       | PBT      |
| NO. | PART NAME              | PART NO.    | COLOR       | MATERIAL |
|     | THIRD ANGLE PROJECTION | A           | 1/1(2/1)    | JJH      |
|     |                        | TOLERANCE   | SCALE       | DESIGN   |
|     |                        |             |             | DRAWN    |
|     |                        |             |             | CHECKED  |
|     |                        |             |             | APPROVED |

|     |          |           |     |                          |     |
|-----|----------|-----------|-----|--------------------------|-----|
| CJW | 06.07.28 | E006-0040 | D   | TML 사양추가 및 적용전선사양변경(5개소) | SSJ |
| KKL | 03.04.09 | BH03019   | C   | 형상 변경(1개소)               | KSW |
| CJW | 02.07.03 | —         | B   | 치수 추가(3개소)               | KMH |
| CJW | 00.02.28 | —         | A   | 형상 변경(6개소)               | JJH |
| CJW | 96.11.11 | —         | —   | 신 규                      | JJH |
| 승인  | DATE     | NOTE NO.  | SYM | ALTERATION               | 담당  |

| GENERAL TOLERANCE |       |       |        |        |        |       |       |
|-------------------|-------|-------|--------|--------|--------|-------|-------|
|                   | 10MAX | 50MAX | 100MAX | 150MAX | 200MAX | 200VR | ANGLE |
| A                 | ±0.2  | ±0.3  | ±0.5   | ±0.8   | ±1.0   | ±1.4  | ±30'  |

**KUM** 케이유엠