



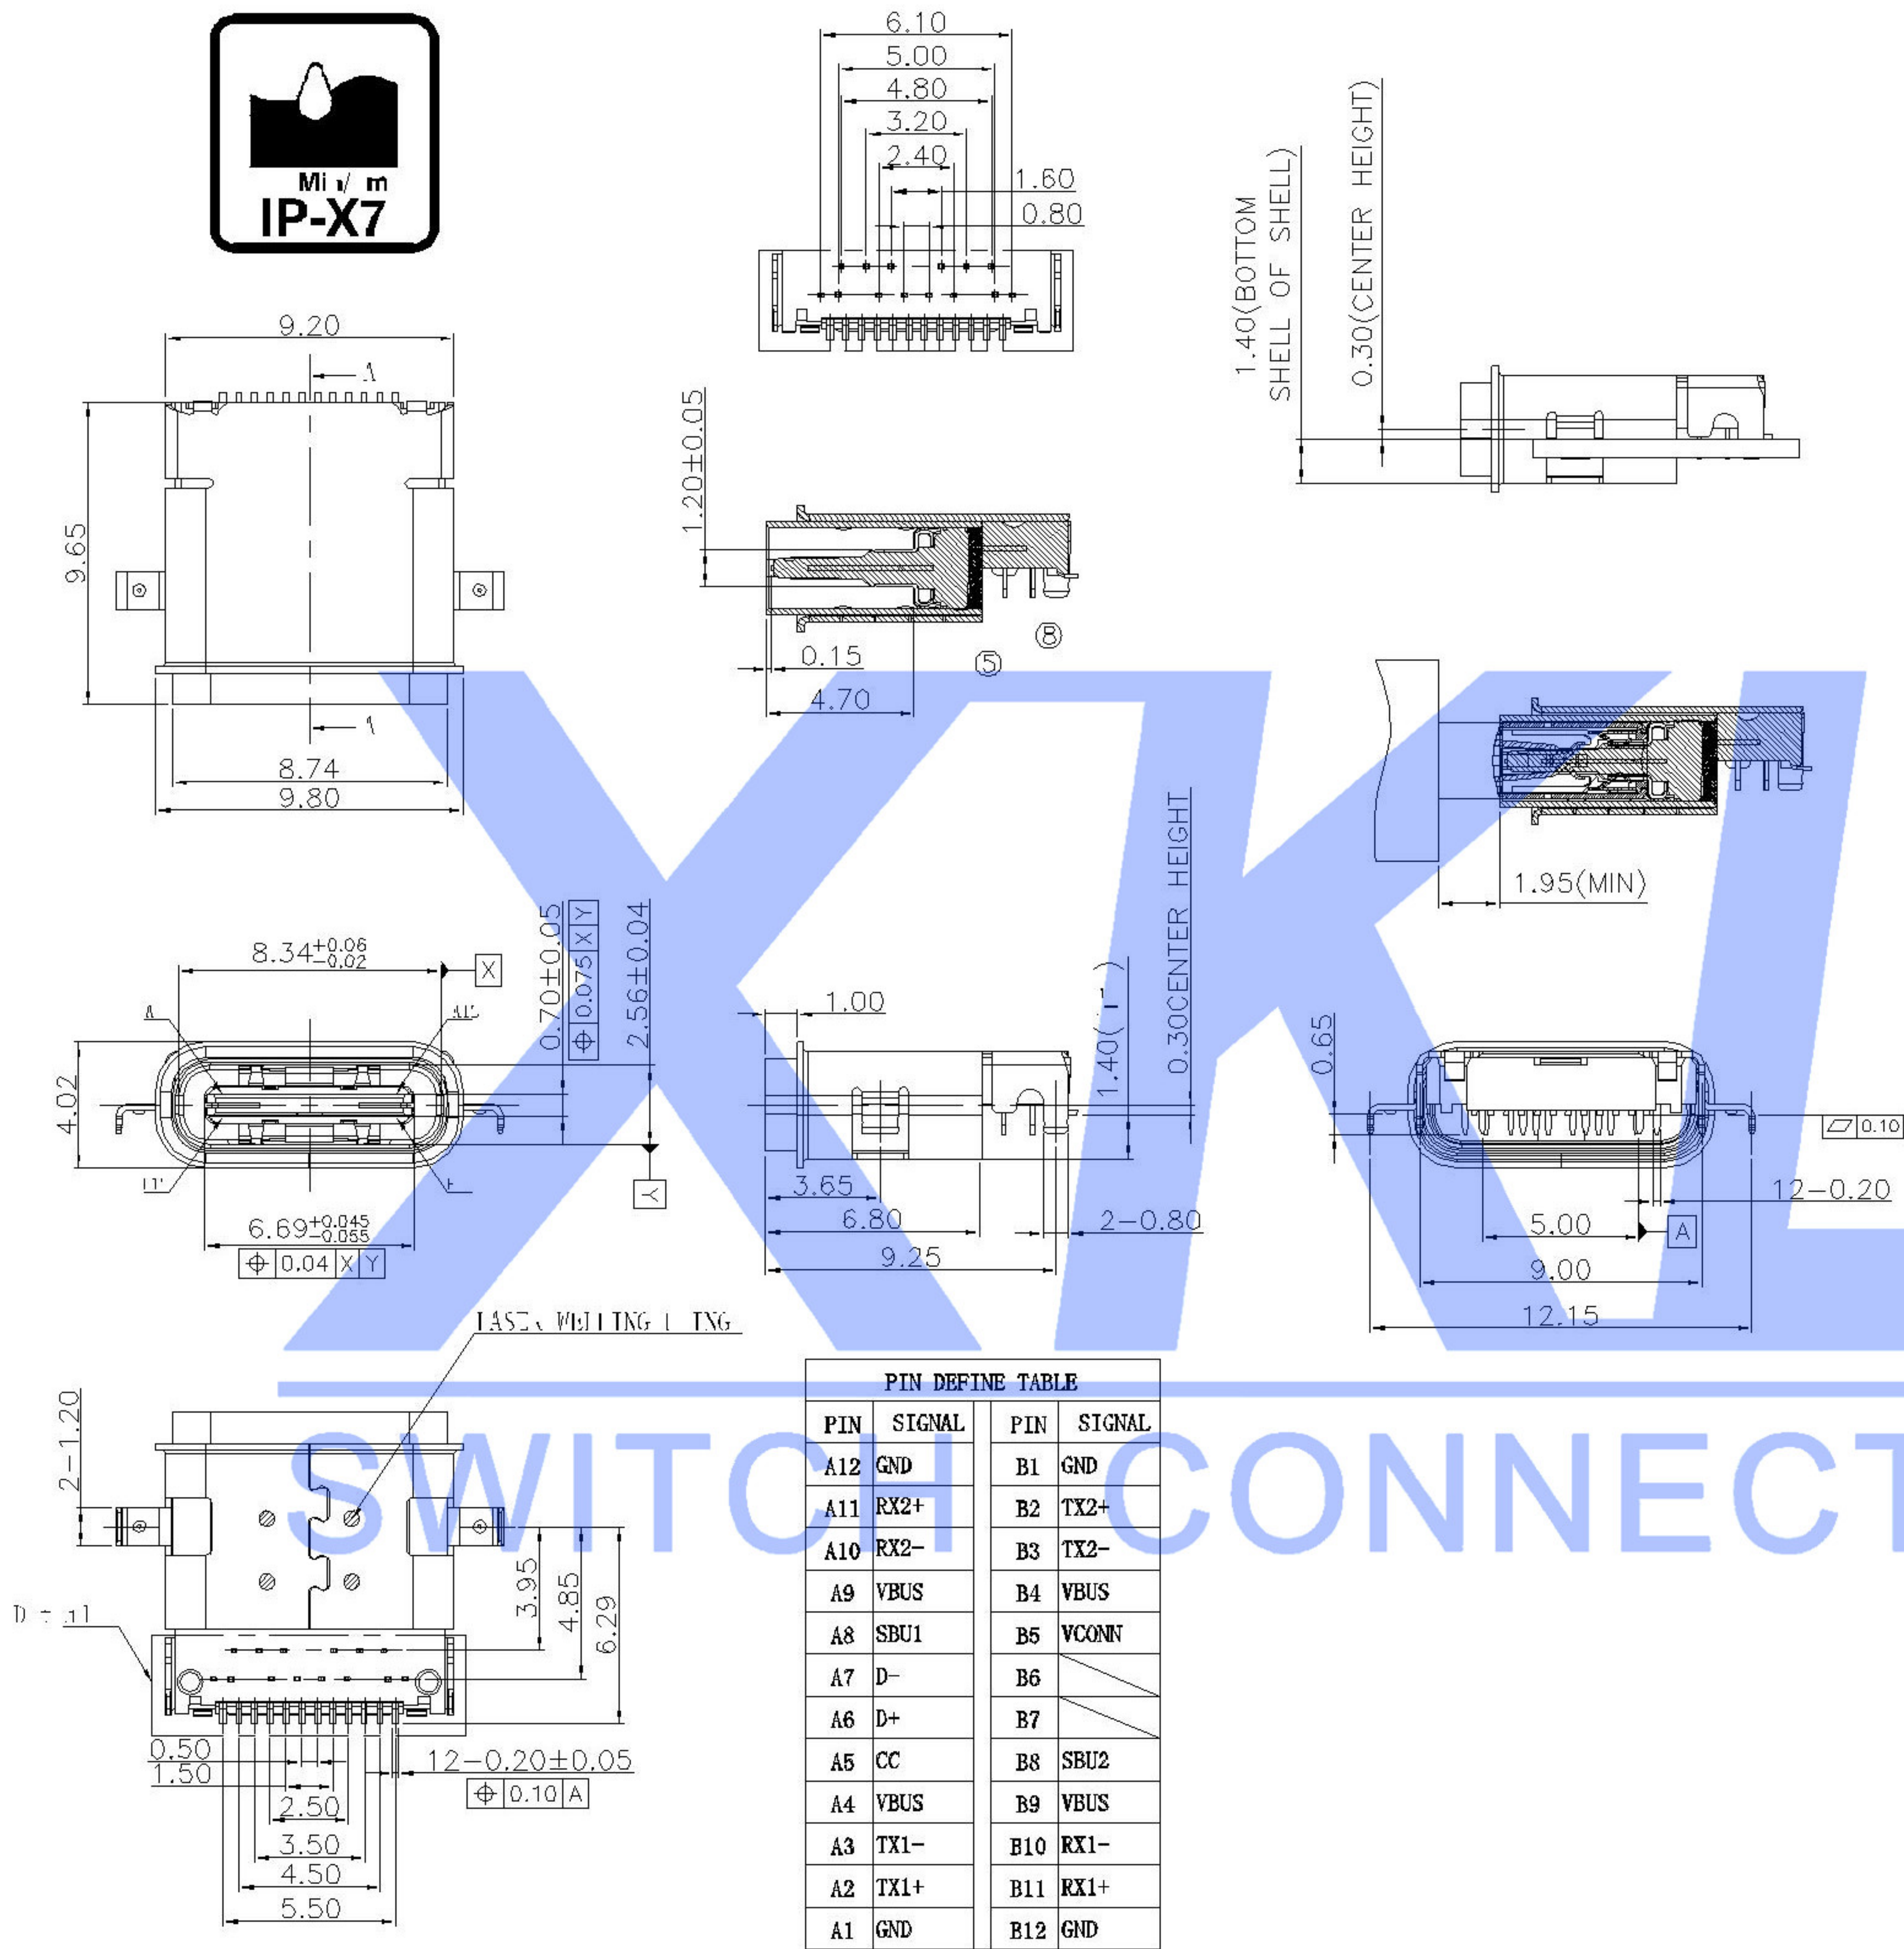

PIN DEFINE TABLE			
PIN	SIGNAL	PIN	SIGNAL
A12	GND	B1	GND
A11	RX2+	B2	TX2+
A10	RX2-	B3	TX2-
A9	VBUS	B4	VBUS
A8	SBU1	B5	VCONN
A7	D-	B6	
A6	D+	B7	
A5	CC	B8	SBU2
A4	VBUS	B9	VBUS
A3	TX1-	B10	RX1-
A2	TX1+	B11	RX1+
A1	GND	B12	GND

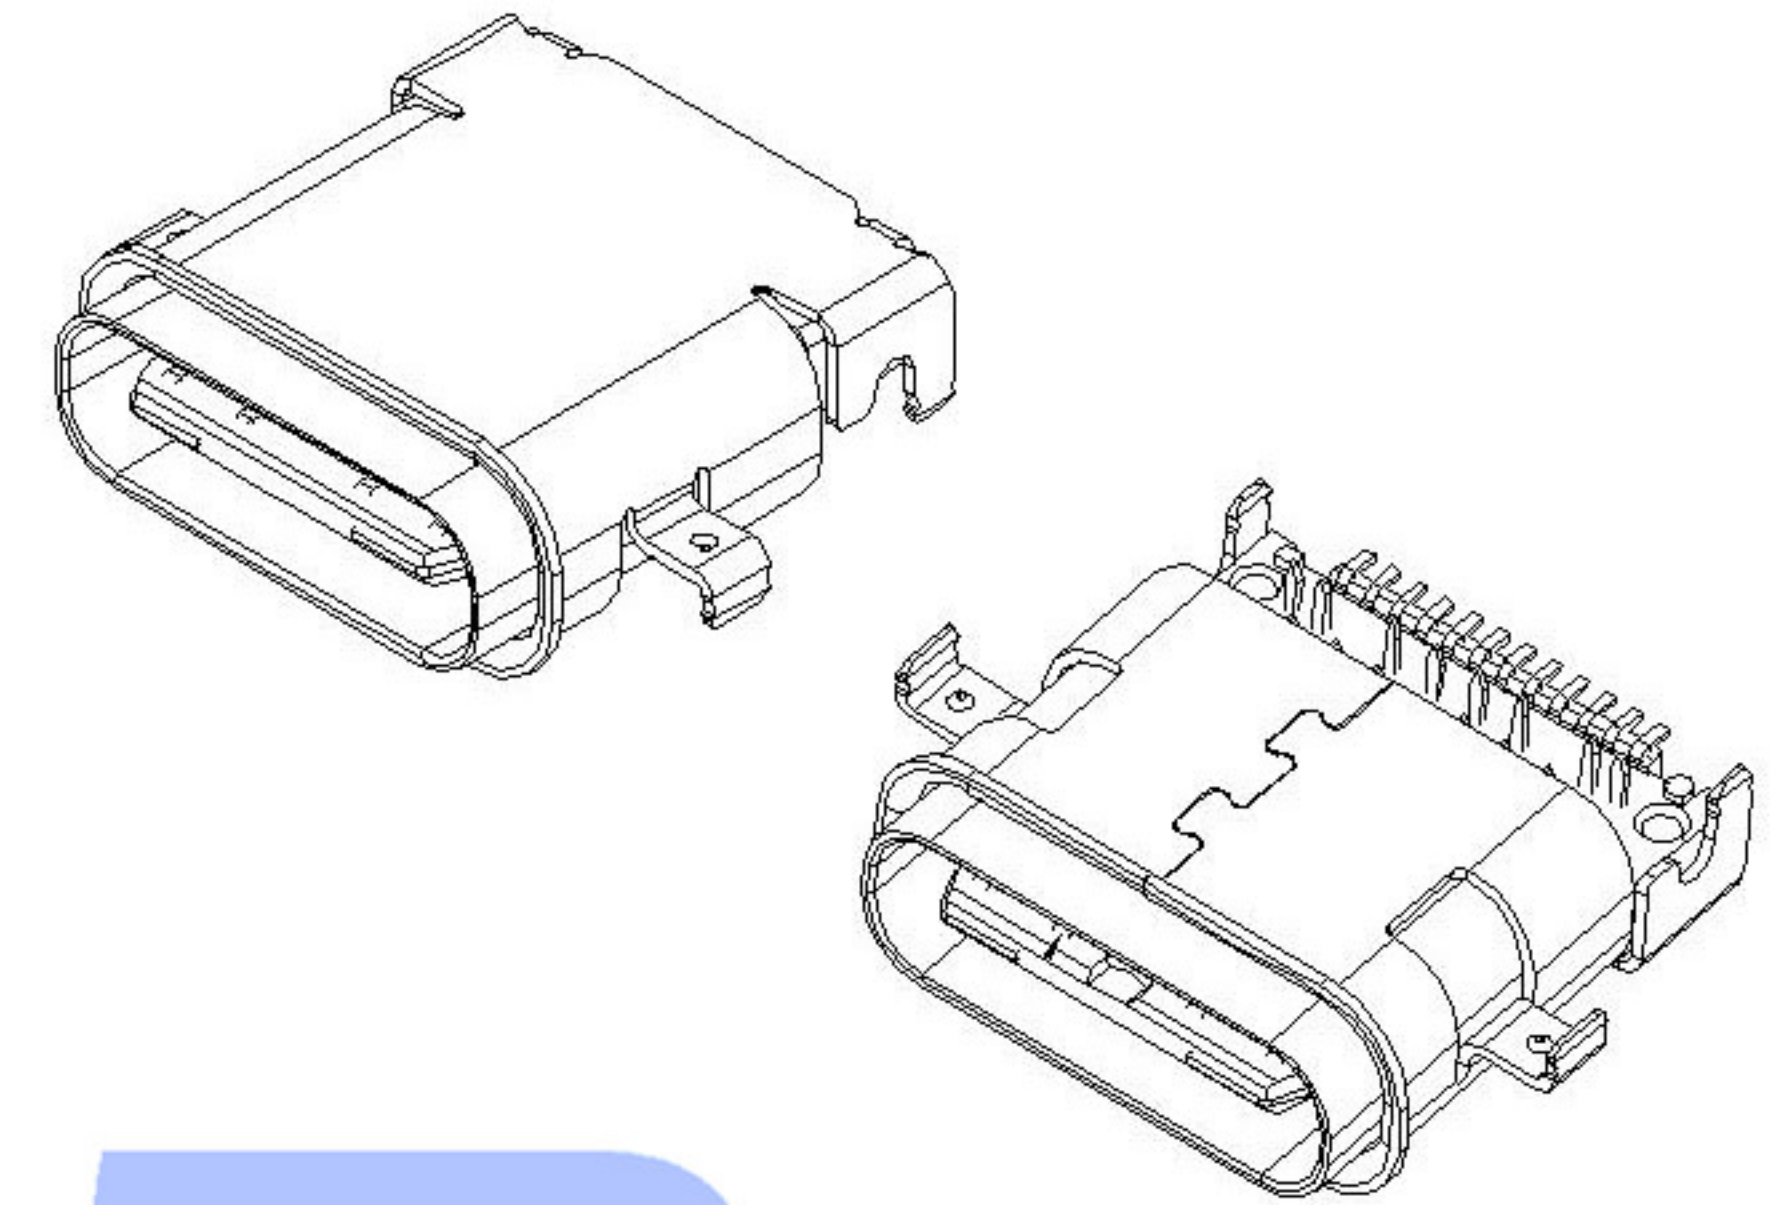

Material
Housing Material: High temperature thermoplastic
Contact Terminal: High Grade Copper Alloy
Metallic Shell: Stainless Steel
Cover Shell: Iron
Inner Ground Cover Shell: Stainless Steel
Mid Plate: Stainless Steel
Plating
Data Contact
Underplating: 50μ" Min. Nickel
Contact Plating: 1μ" Gold
Solder Area: 80μ" Matte Tin
Shell
Metallic Shell: 50μ" Min. Nickel
Cover Shell
Metallic Shell: 80μ" Min. Nickel
Inner Ground Cover Shell
Metallic Shell: 50μ" Min. Nickel
Electrical
Voltage Rating: 20V DC
Current Rating: Vbus pins collectively 5.00A, GND pins collectively 6.25A, B5 pin 1.25A, Other pins 0.25A per pin.
Contact Resistance: 40mΩ Max.
Insulation resistance: 100 MΩ MIN.
Dielectric withstanding voltage: 100V AC/Minute
Mechanical
Durability: 10,000 cycles
Mating Force: 5 to 20N
Unmating Force: 8 to 20N (post test)

						DSND		DATE		SCALE: N/A	MODEL TYPE: 3.1 TYPE C		
△X					ANGULAR	DWN		DATE		VIEW:	PART NO.:		
△X					$L \leq 4$			DATE		UNIT: mm	DWG NO.:		
△X					$4 < L \leq 16$			DATE		SIZE: A4	USB3.1-TYPE-C-FSABC		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	$16 < L \leq 63$	APPD		DATE			WEIGHT	SHEET	REVISION
REVISIONS					$L > 63$	UNSPECIFIED TOLERANCES					1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					XKB INDUSTRIAL PRECISION CO.,LIMITED								