
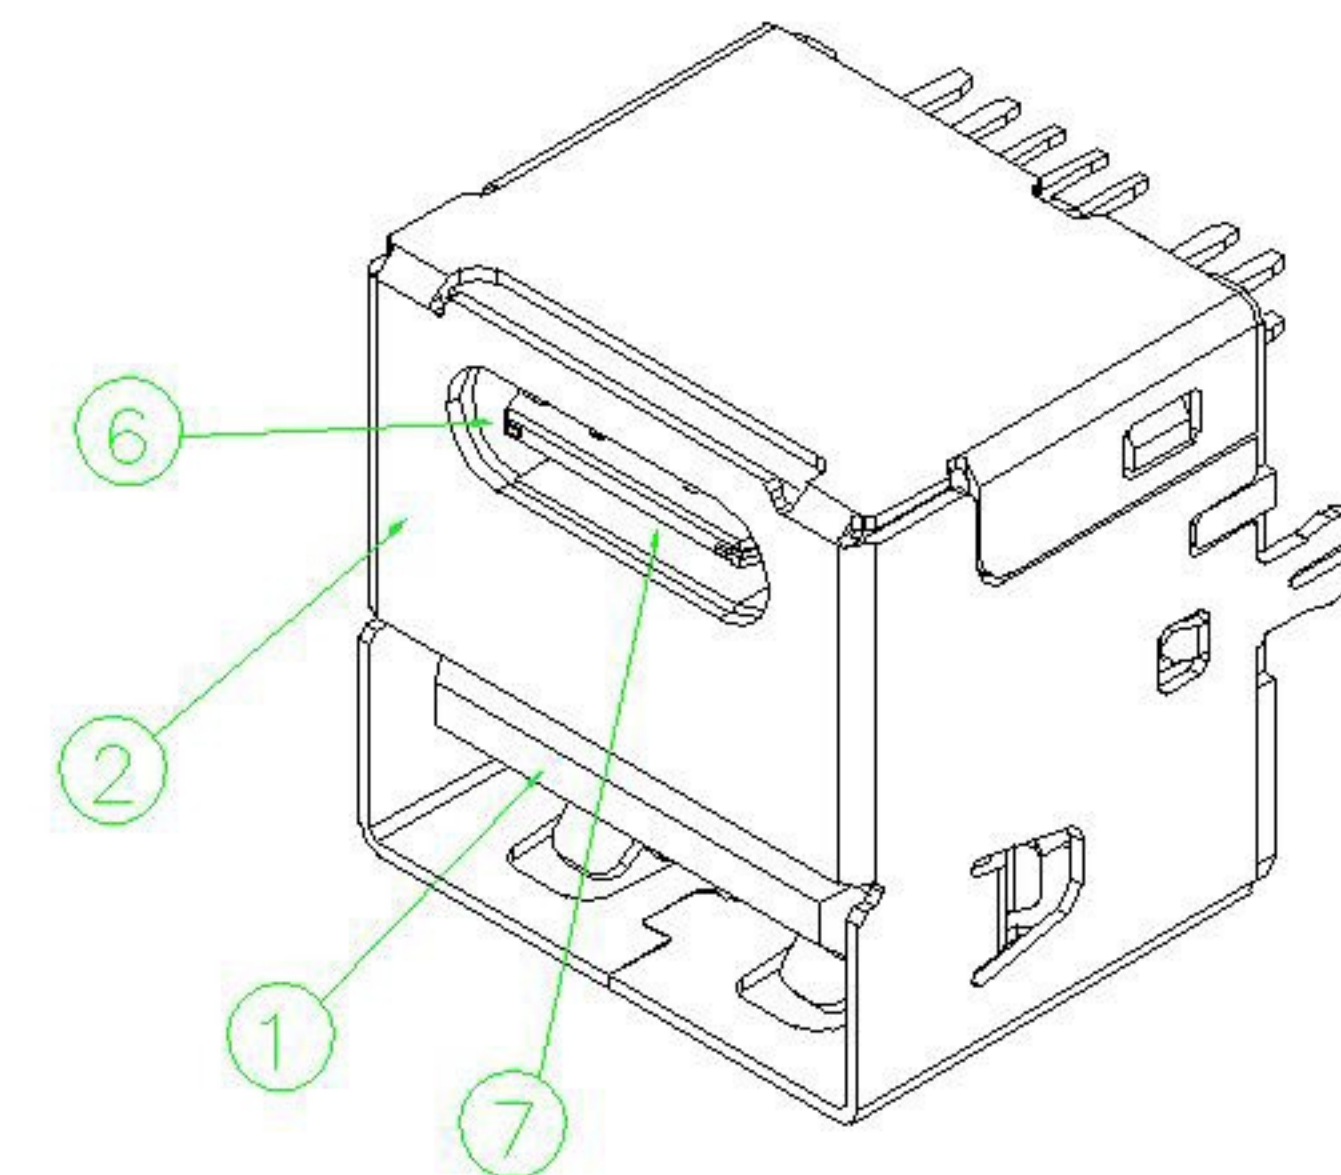
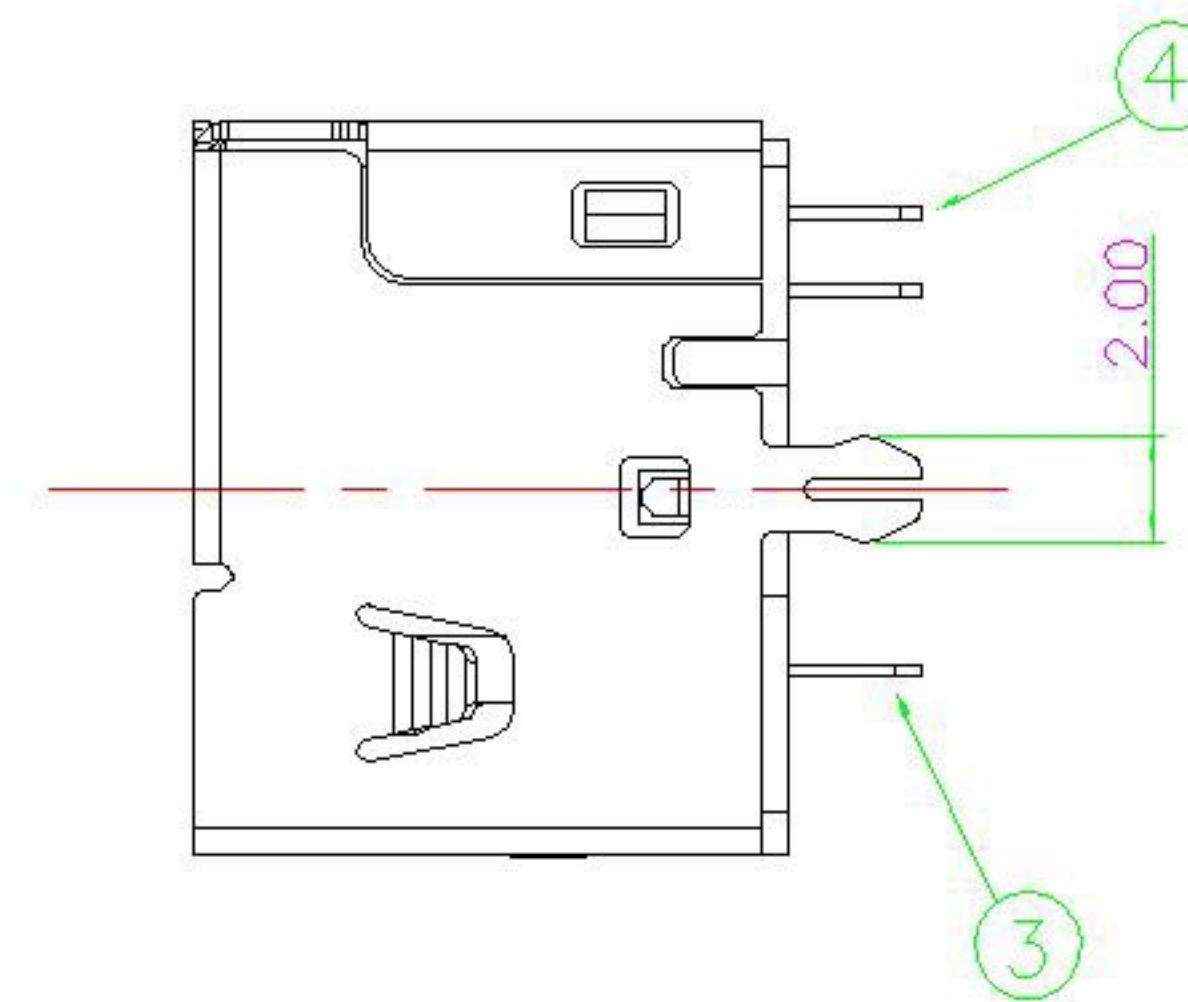
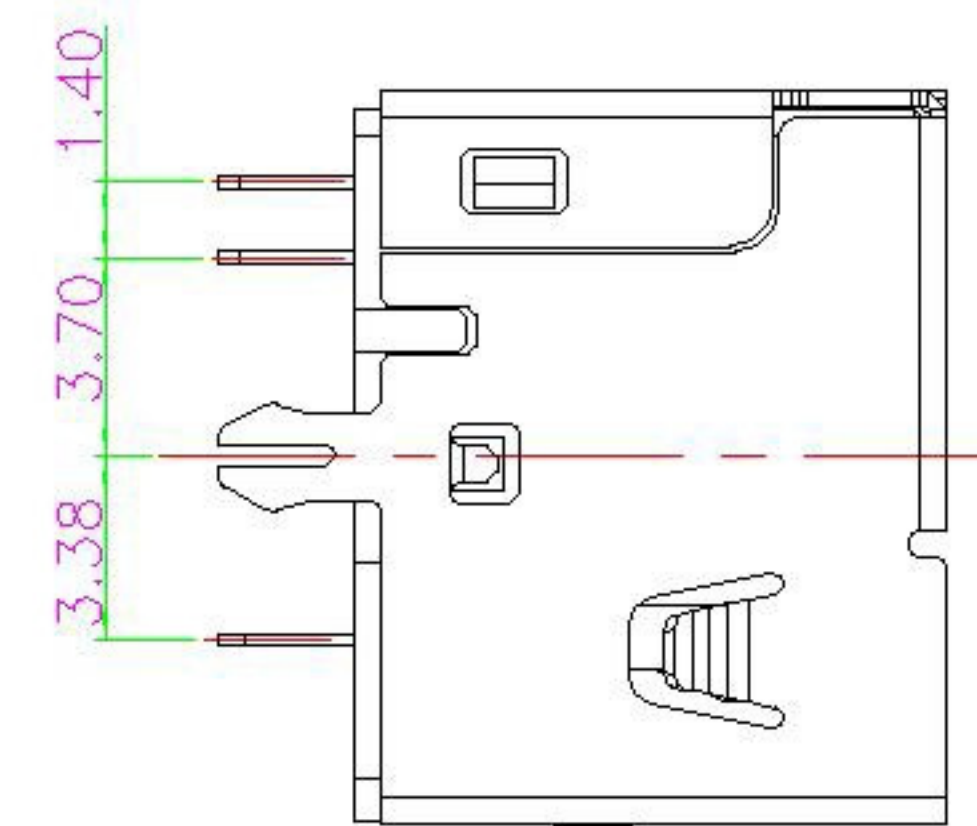
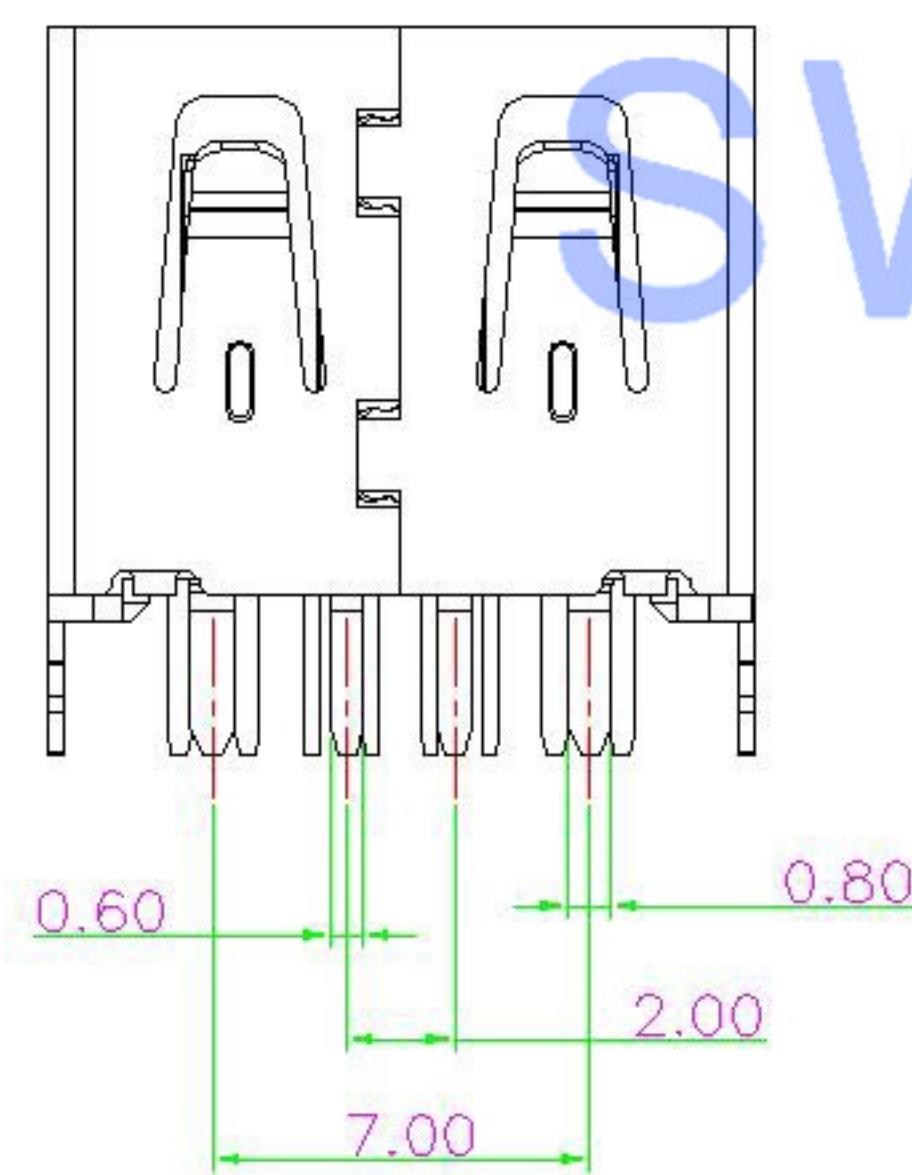
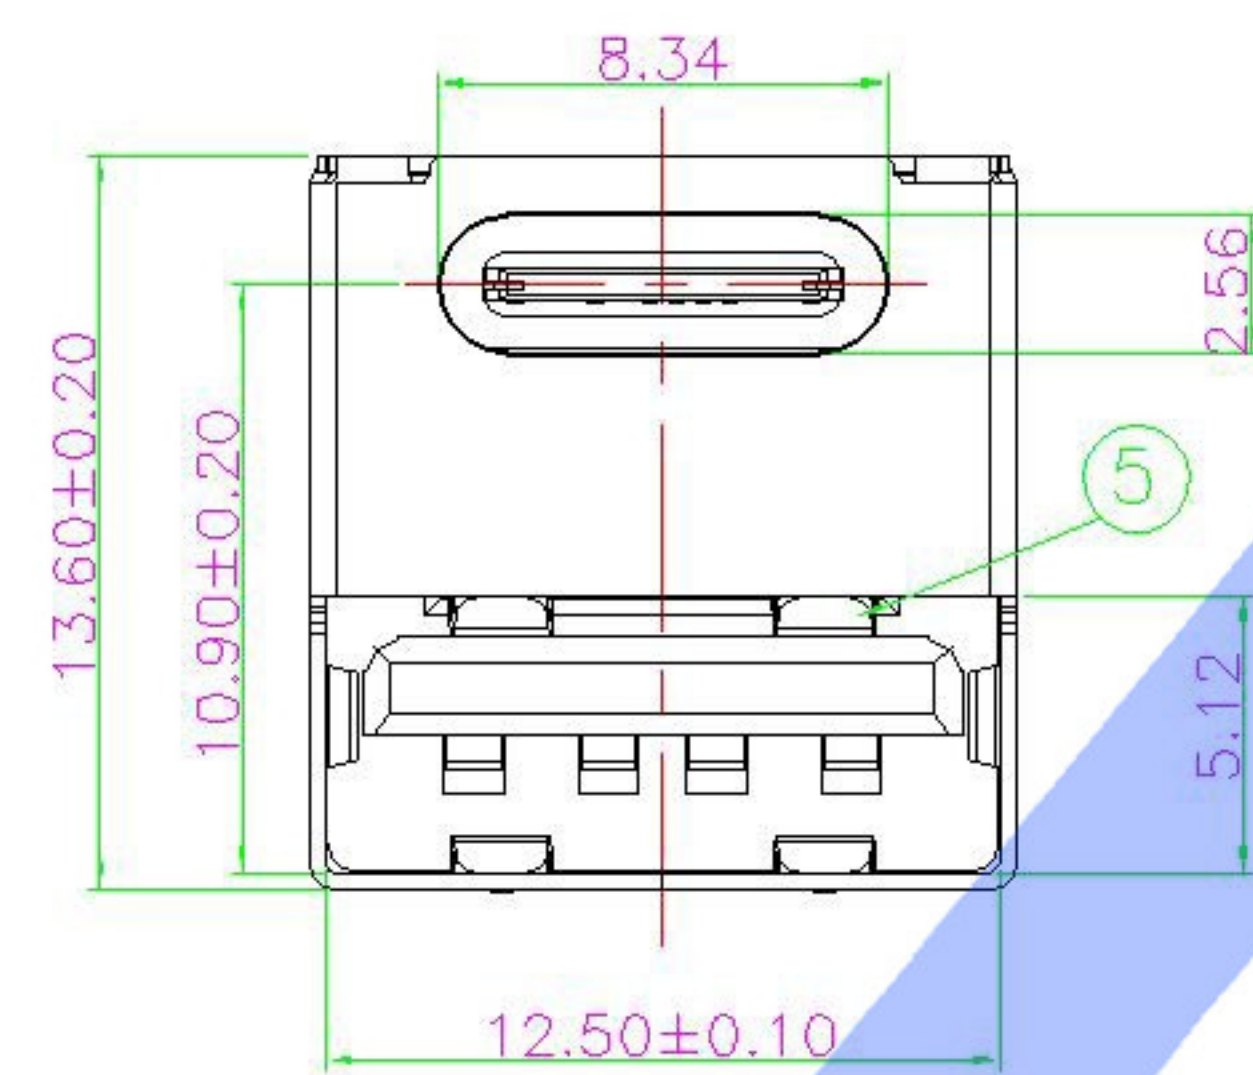


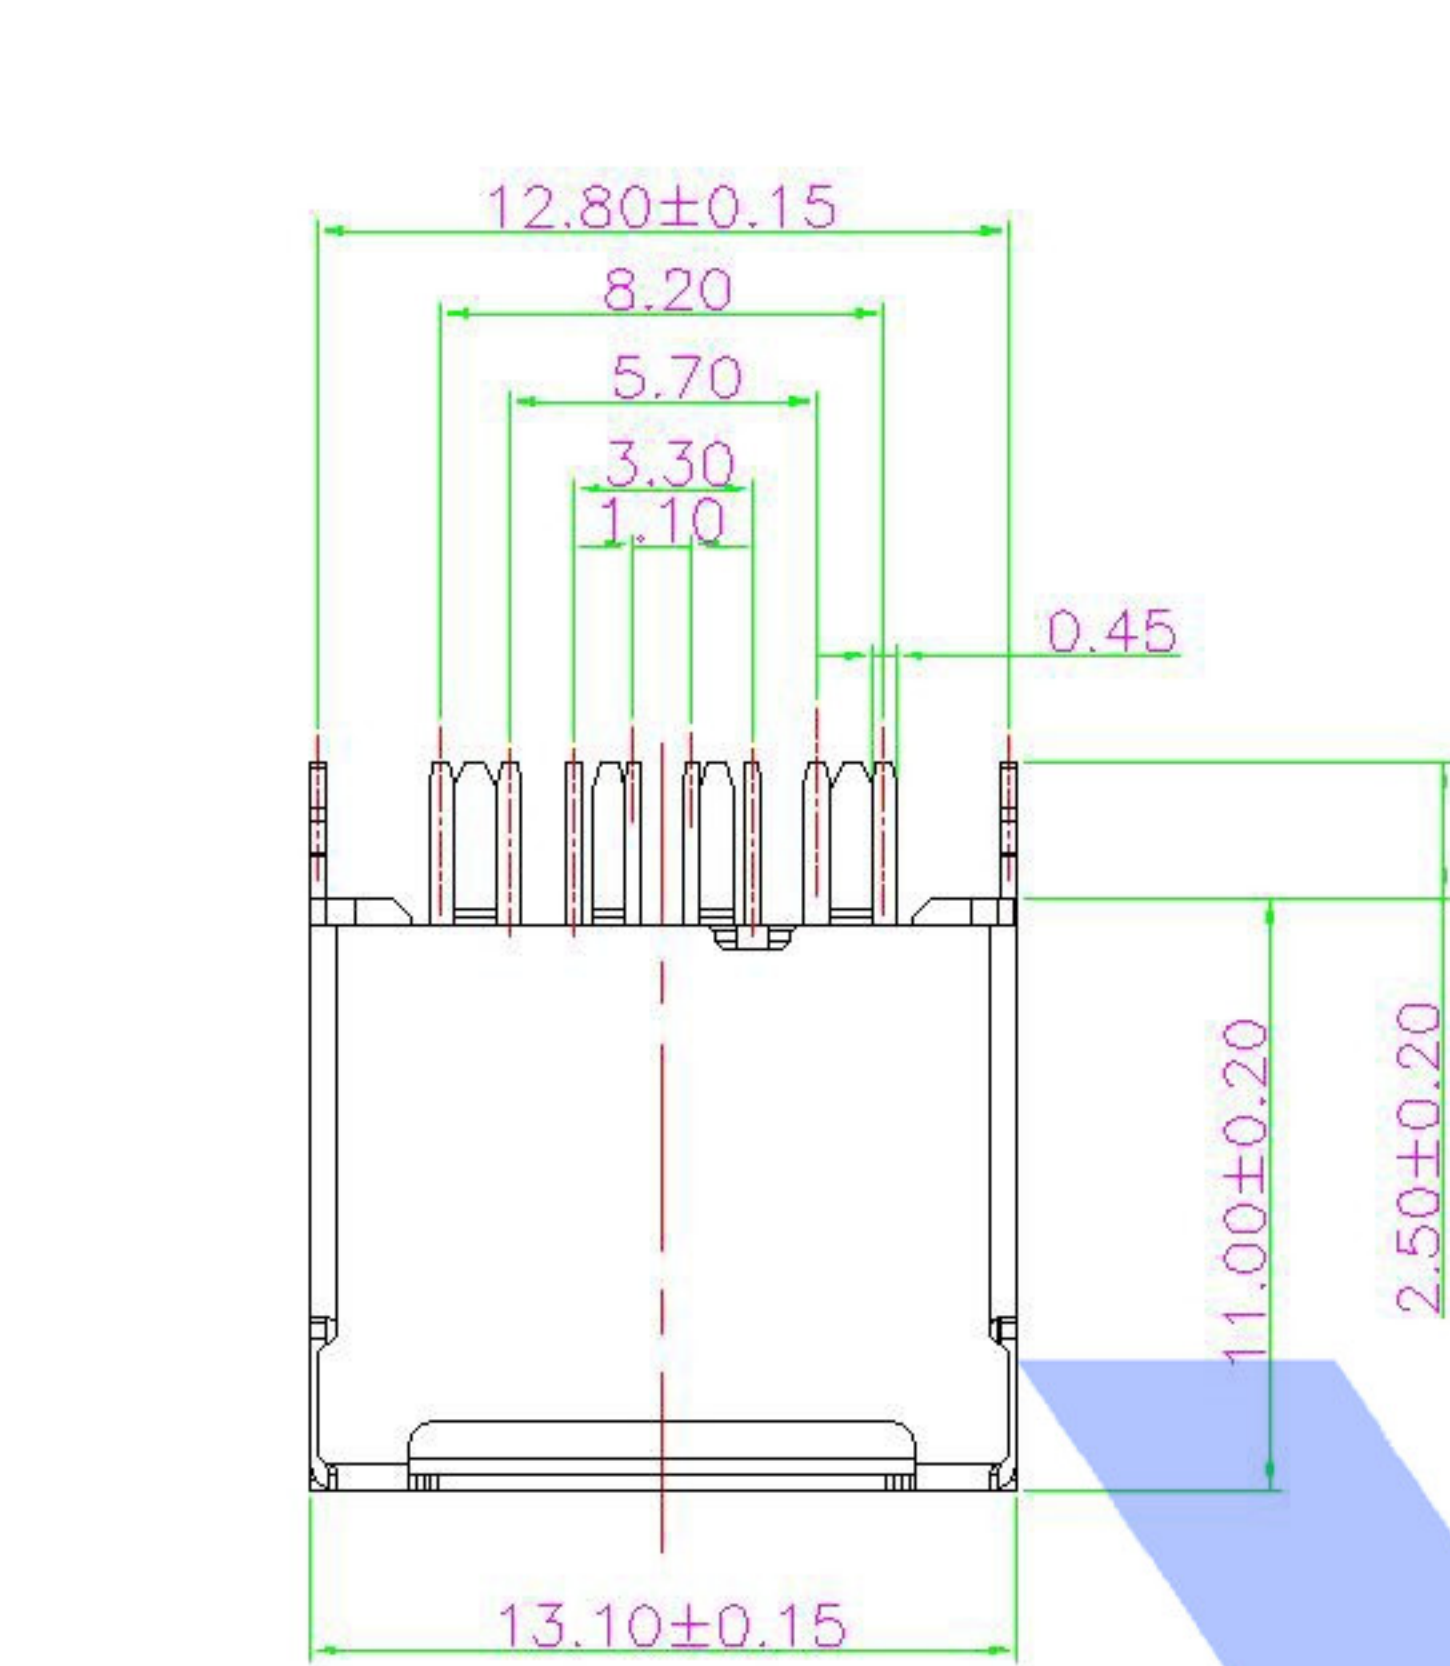

1. CURRENT RATING:
a:TYPE-C: 8.0A MAX
b:USB2.0: 5.0A MAX
2. Withstanding Voltage: 100V AC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS
6. INSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N~20N (1~1000次)
6N~20N (10000次之耐)
8. DURABILITY: 10,000 CYCLES

USB3.1-TYPE-C-L B 01T-1

HOUSING MATERIAL
L=LCP

HOUSING COLOR
B=BLACK
W=WHITE

PACKAGE TYPE

CONTACT PLATING
01=G/F

Recommended P.C.B Layout
Tolerance:±0.05

7	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
6	CENTER PIECE	STAINLESS STEEL	—	NO Plated
5	TYPE C TERMINAL	COPPER ALLOY	—	Gold Plated
4	CLIP	SEE NOTE	—	Ni Plated
3	USB TERMINAL	COPPER ALLOY	—	Gold Plated
2	SHELL	SEE NOTE	—	Ni Plated
1	HOUSING	HIGH TEMP	BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

							DSND		DATE		SCALE: N/A	MODEL TYPE: TYPE-C CONNECTOR			
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.: USB3.1-TPYE-C-L B 01T-1			
△X					L≤4	±0.2	CHKD		DATE		UNIT: mm	DWG NO.: USB3.1-TPYE-C-L B 01T-1			
△X					4<L≤16	±0.3	APPD		DATE		SIZE: A4				
△X					16<L≤63	±0.4									
MARK	DESCRIPTION			DATE	REVISED	APPROVED	L>63	±0.5							
REVISIONS							UNSPECIFIED TOLERANCES			XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
www.xk-dg.cn www.1k0k.com www.1k0k.cn													1.0g	1/1	A0