
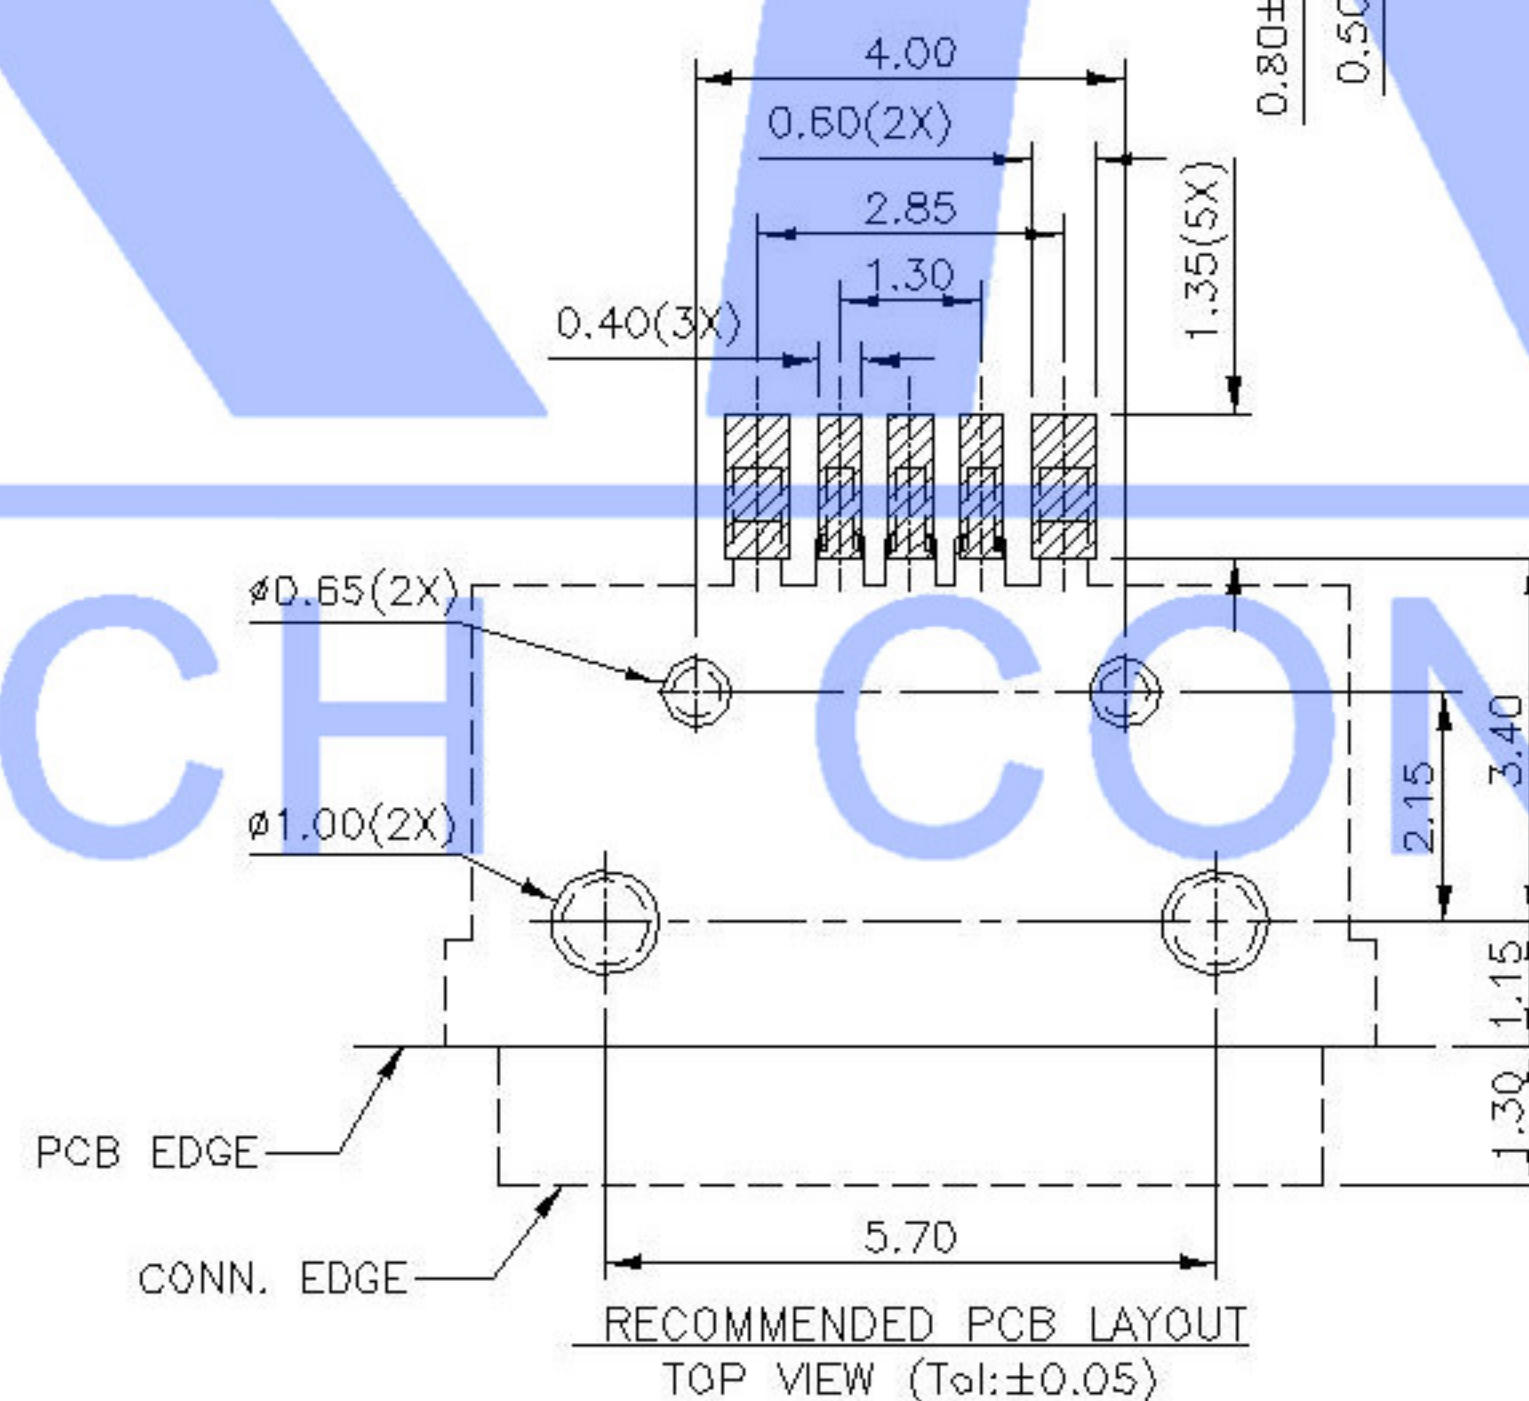
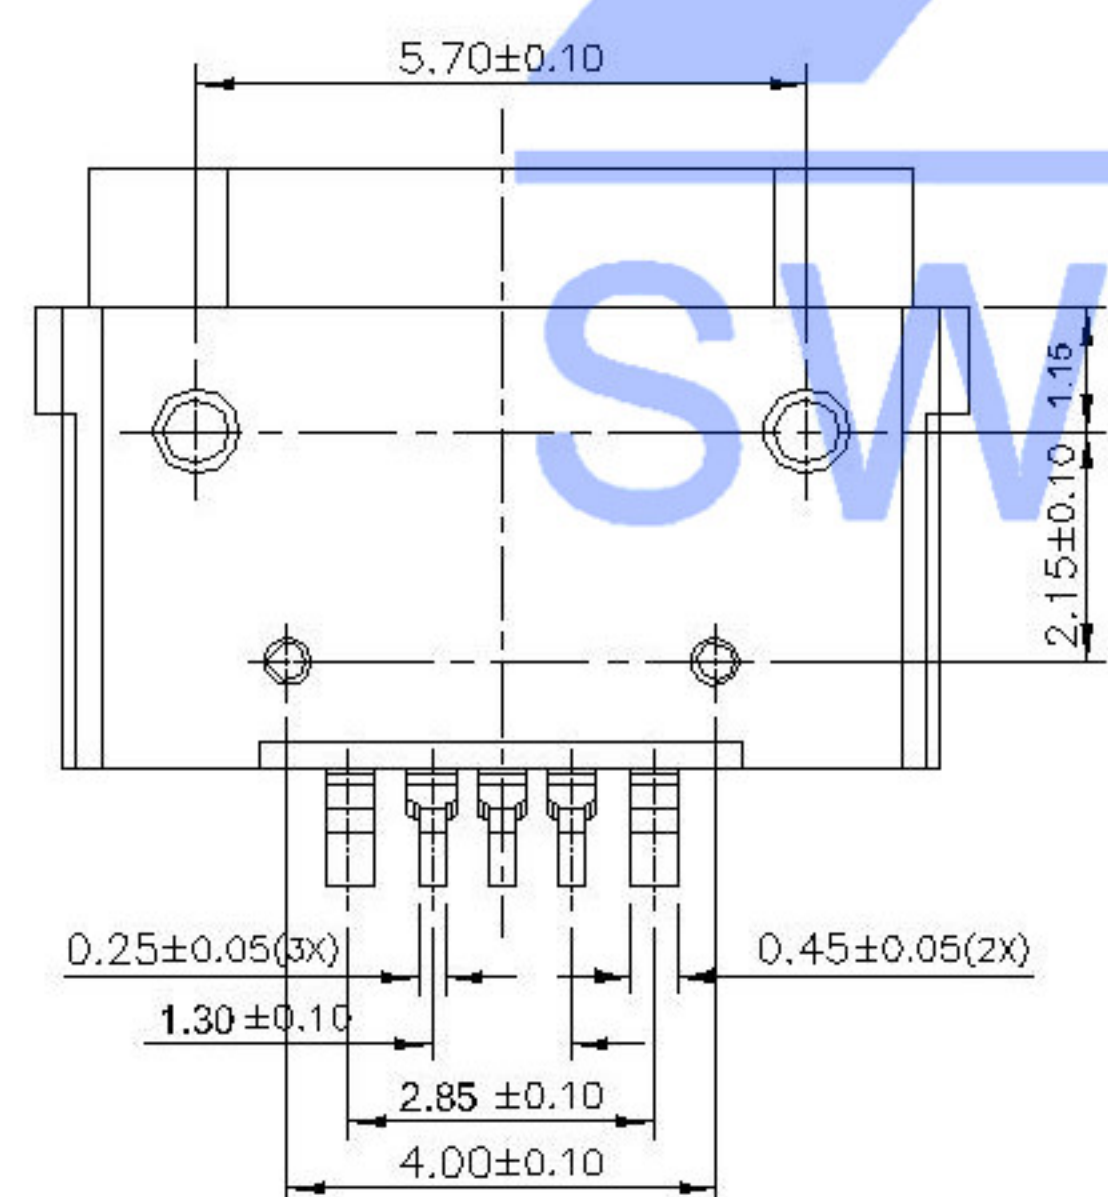
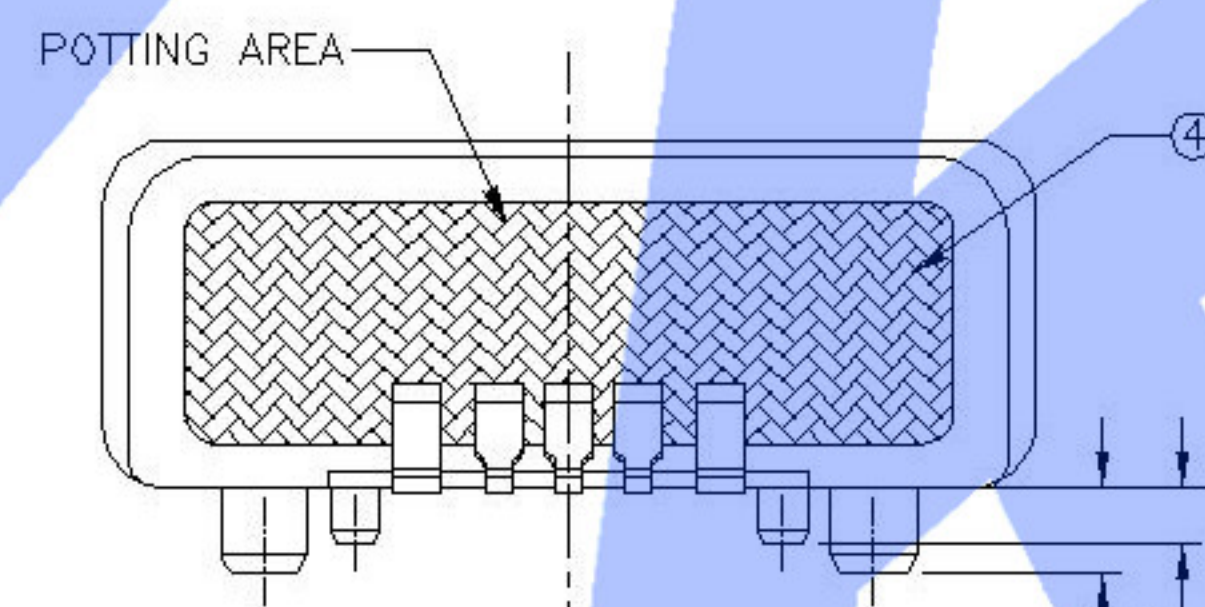
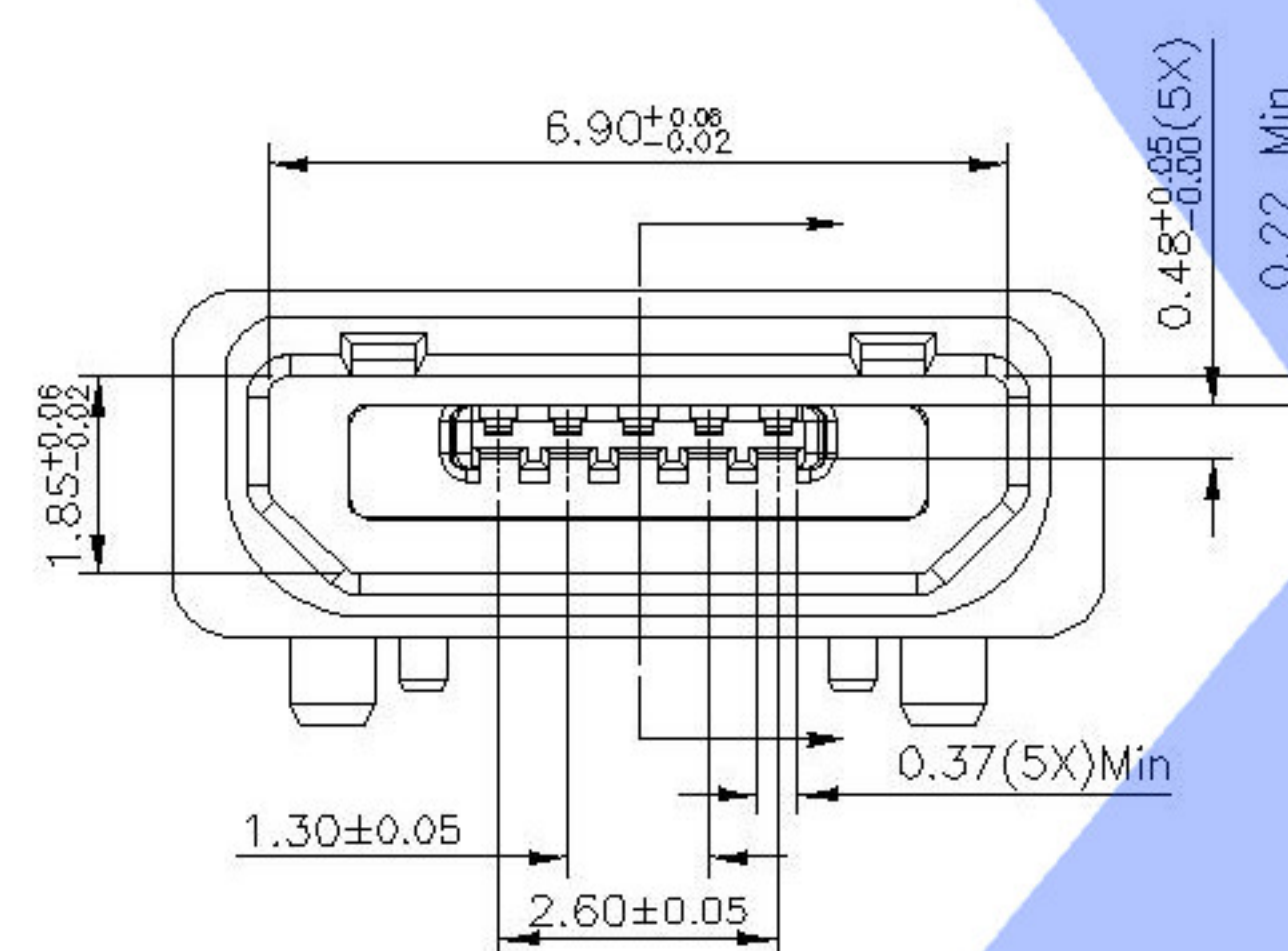
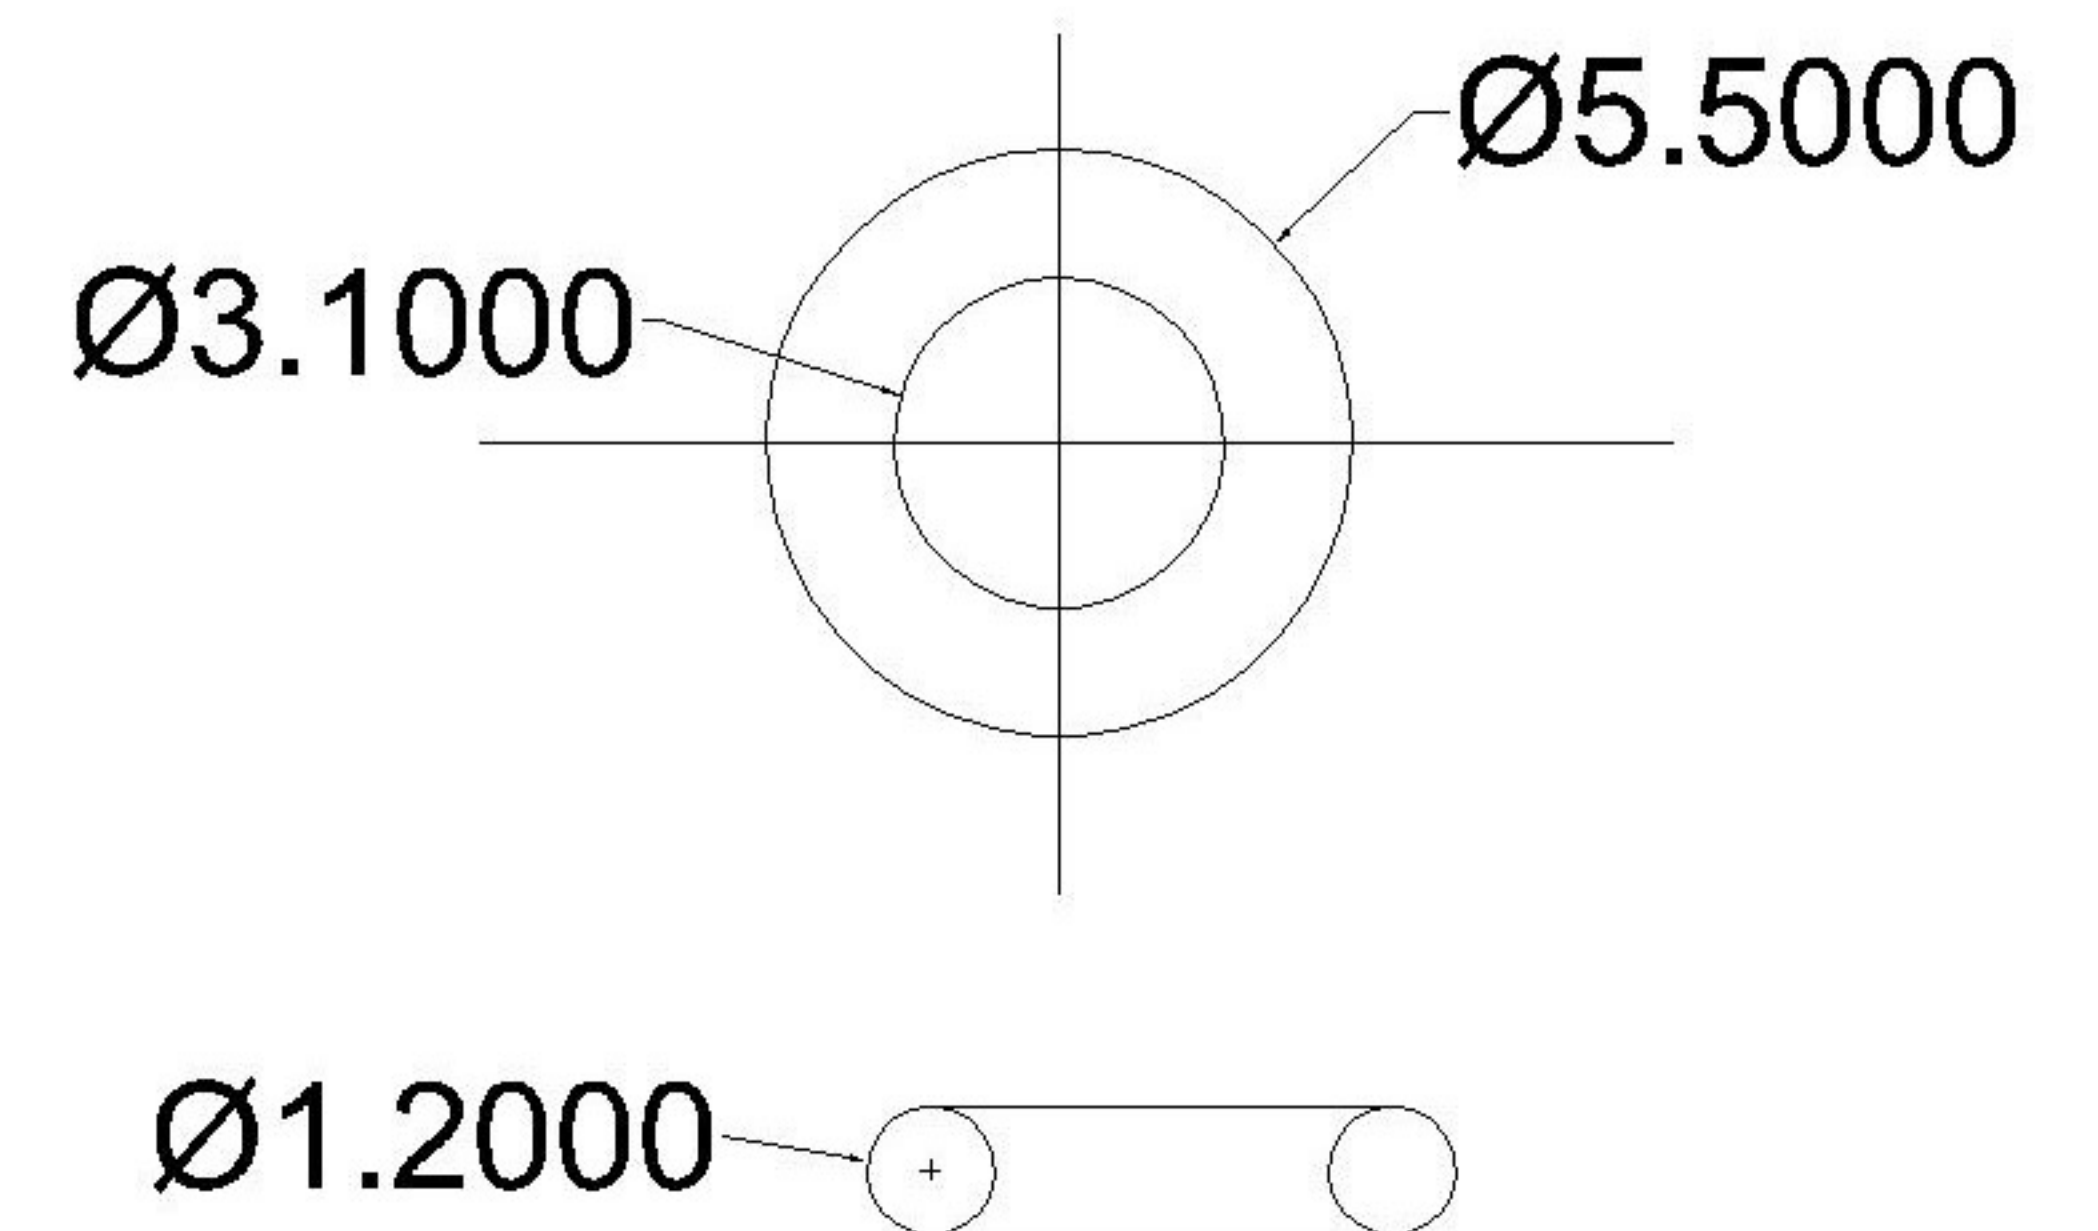
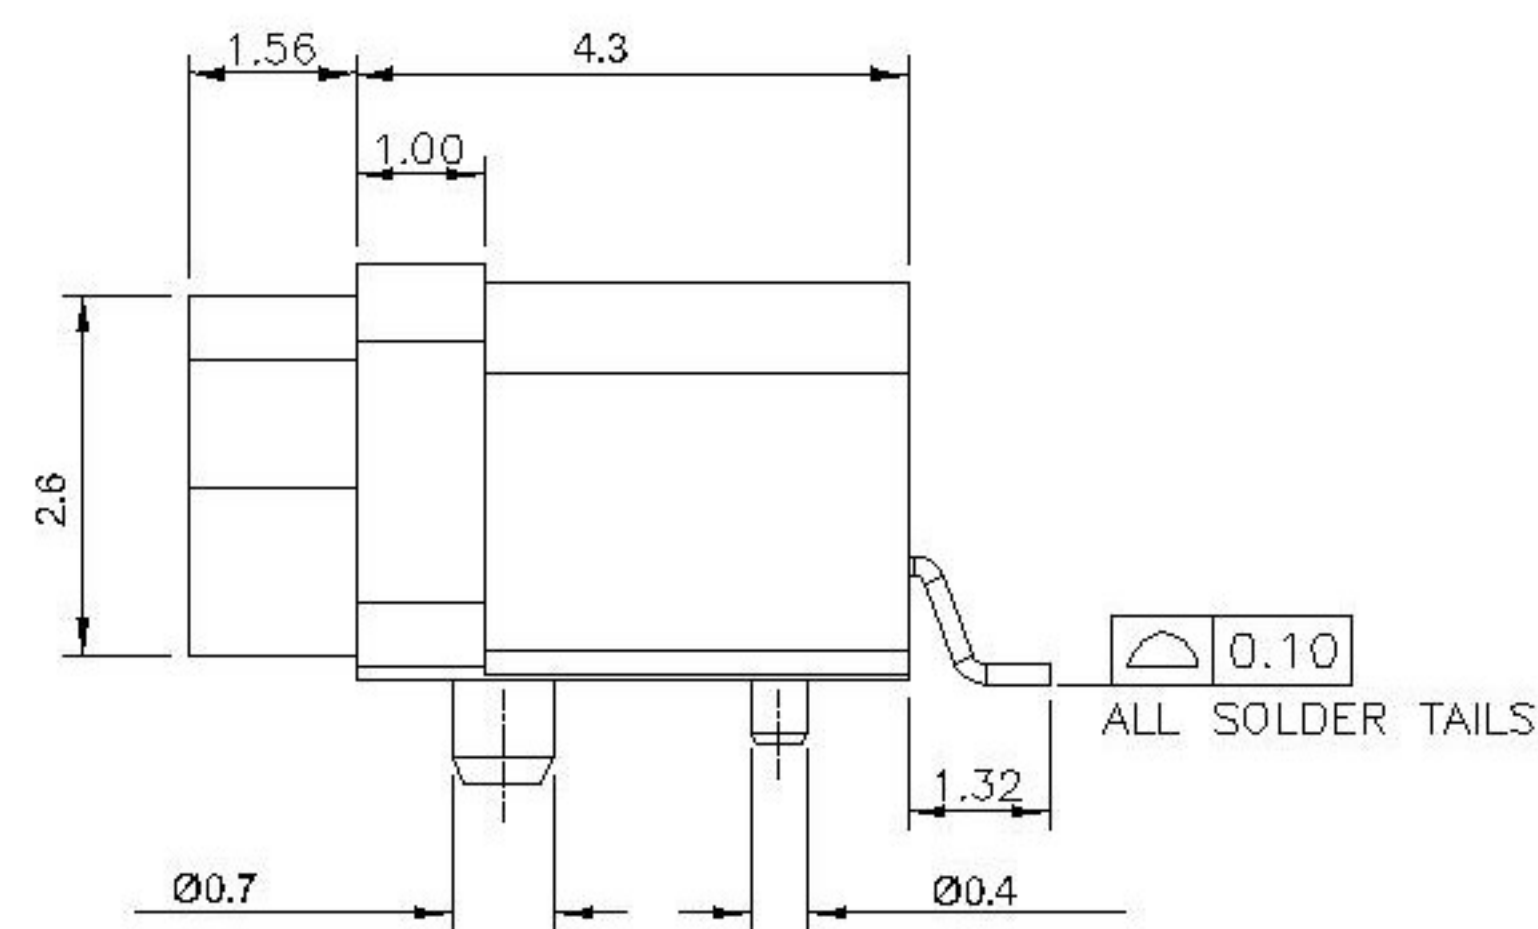


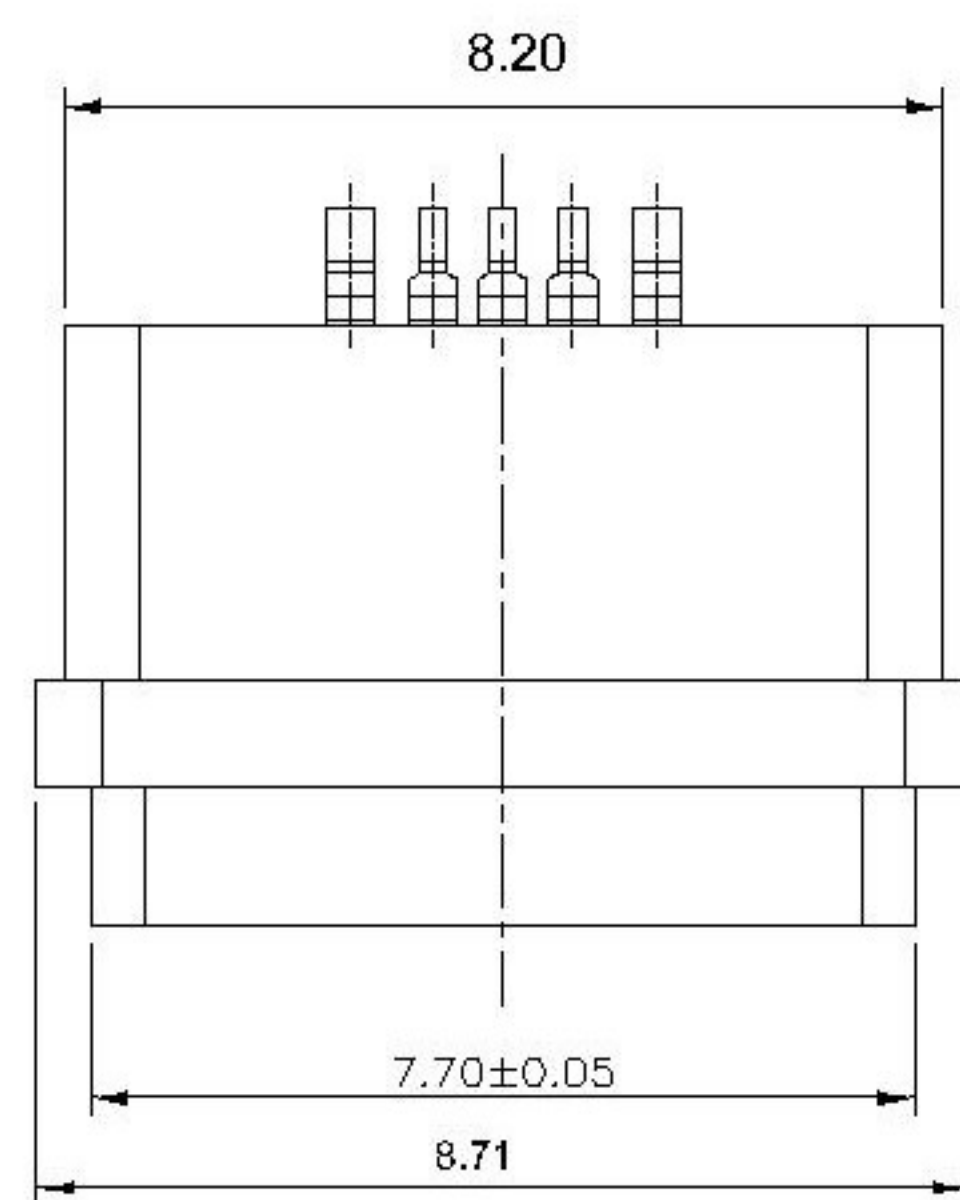

- NOTES:
- CONTACT CURRENT RATING: 1.0A(SIGNAL PIN2,3,4);2.0A(POWER PIN1,5).
 - CONTACT RESISTANCE: 30mΩ MAX.;
 - INSULATION RESISTANCE: 1000MΩ MIN.;
 - DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 25N (2.55Kgf)MAX.;
 - CONNECTOR UNMATING FORCES: 2~25N (0.20~2.55Kgf);

ITEM	PAPT NAME	QTY	MATERIAL	FINISHING
③	Shell	1	SUS304R-1/2H	Ni Plating T=0.3mm (3u)
②	Terminal	5	Phosphor Bronze C5191R-EH	Au/Ni Plating T=0.2mm (1u)
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

							DSND		DATE		SCALE: N/A	MODEL TYPE: MICRO USB		
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
△X					L≤4	±0.2	CHKD		DATE		UNIT: mm	DWG NO.: U-E-M5SS-W-4		
△X					4<L≤16	±0.3								
△X					16<L≤63	±0.4								
MARK	DESCRIPTION		DATE	REVISED	APPROVED	L>63	APPD		DATE		SIZE: A4			
REVISIONS						UNSPECIFIED TOLERANCES	XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
												1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn														