


客户确认	
日期	

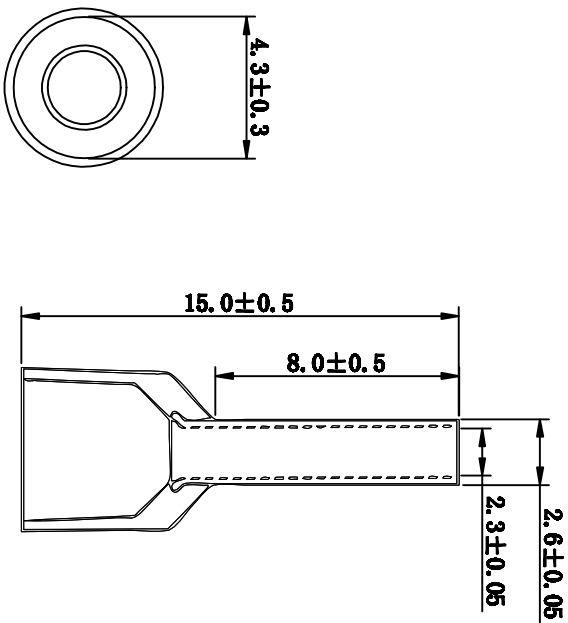

- 适用于数据线
- 尺寸单位: mm
- 符合ROHS

- Apply in flexible wire
- DIMENSIONS: mm
- Conform to the ROHS

CE SGS

端子材料: 紫铜 TERMINAL BODY: COPPER	壁厚: 0.14 ± 0.03 THICKNESS	TOLERANCE TABLE	
绝缘材料: 尼龙 INSULATION BODY: NYLON	绝缘护套温度: 105°C INSULATION GRESSOUTING TEMP	.0	± 0.30
表面处理: 镀锡 PLATING: TIN	皮厚厚度: 2.0~2.6 PLATING THICKNESS	.00	± 0.20
皮厚厚度: $120^{\circ}/24\text{寸}$ COATING THICKNESS	绝缘类型: 嵌合线 STRAINED	.000	± 0.05

APPROVED:	DATE:	TITLE: 管形端子 E2508 黑色护套端子				
CHECKED:	DATE:					
DRAWN:	DATE:	Part No.	3-E250T020-C000			
SXA	2019-05-16	UNIT	mm	SCALE	free	REV.
		FILE NO.		/		GS00

深圳市灿科盟实业有限公司
CHANKEMENG INDUSTRY CO., LTD