

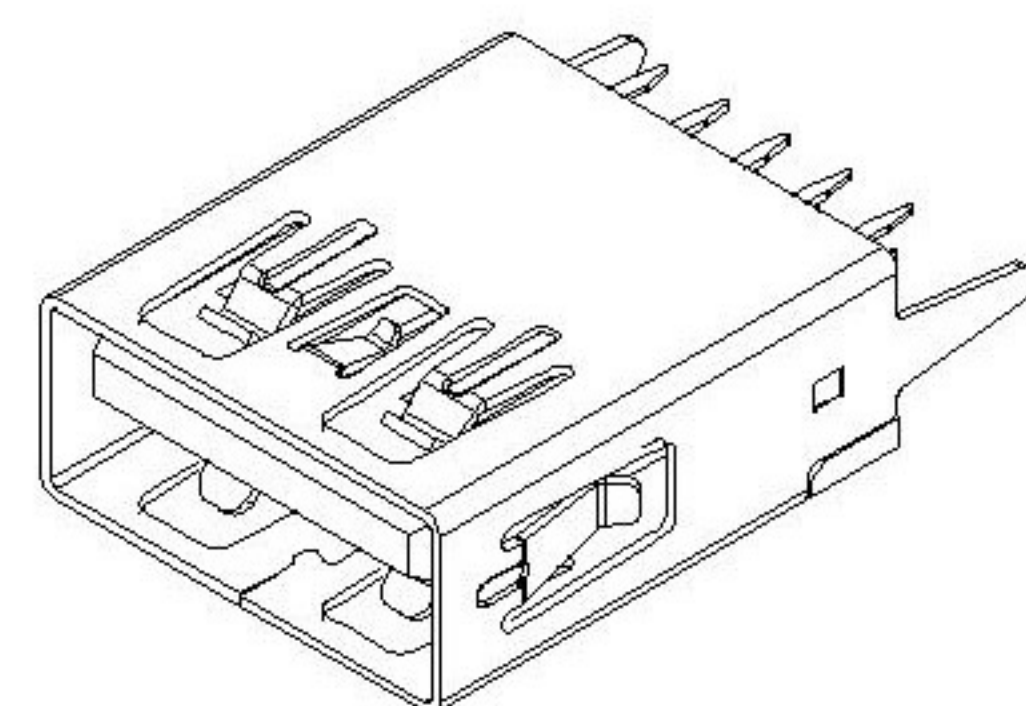
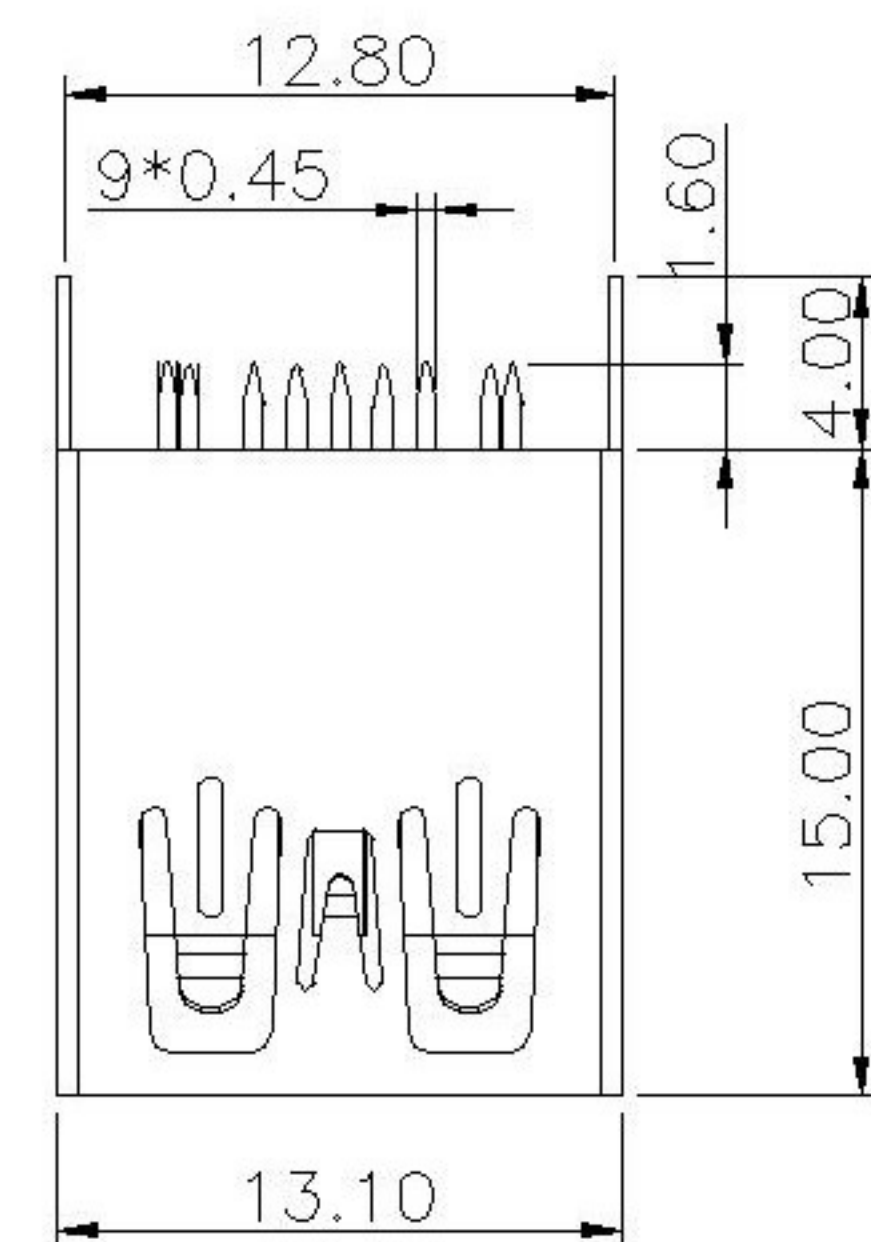
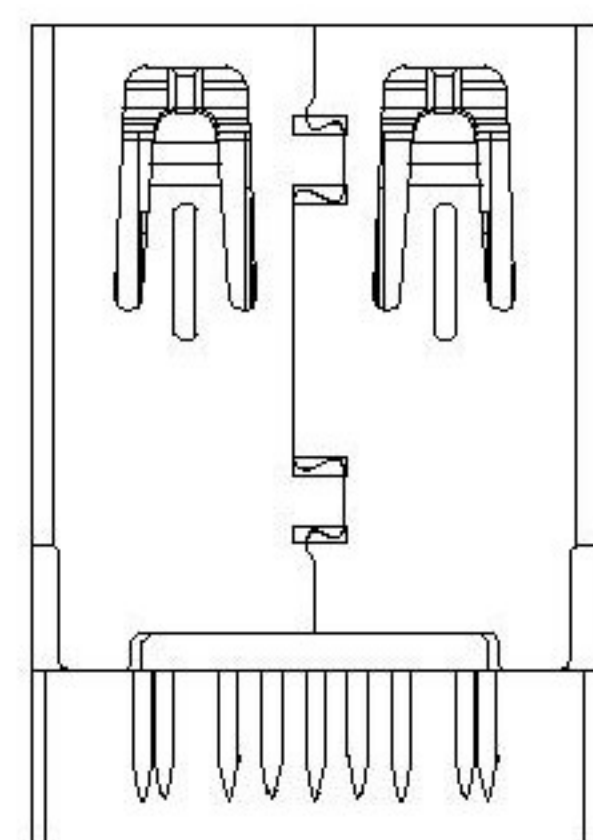



Flat (F)

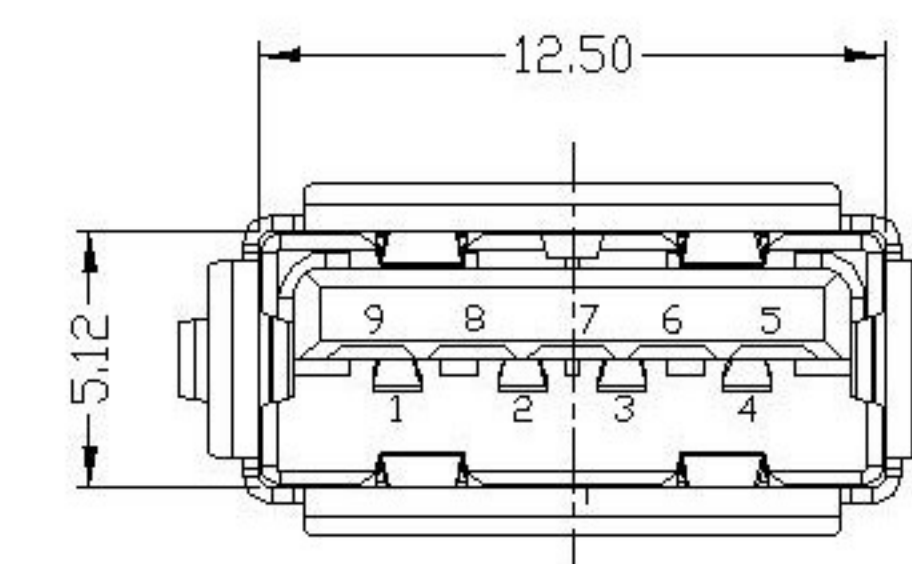

XKB
SWITCH CONNECTOR

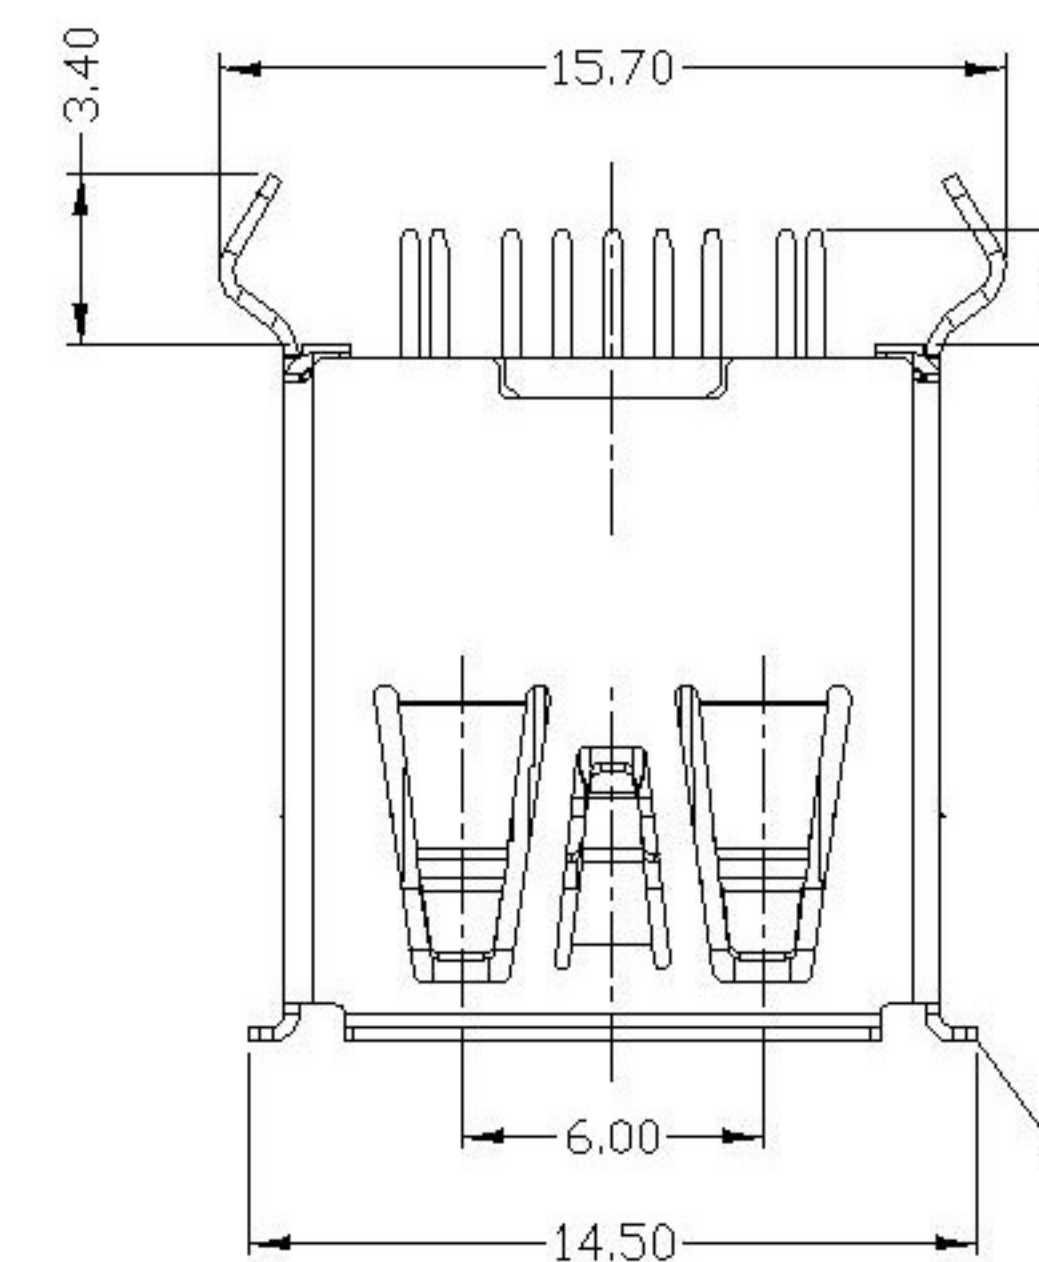

Scrolls (S)

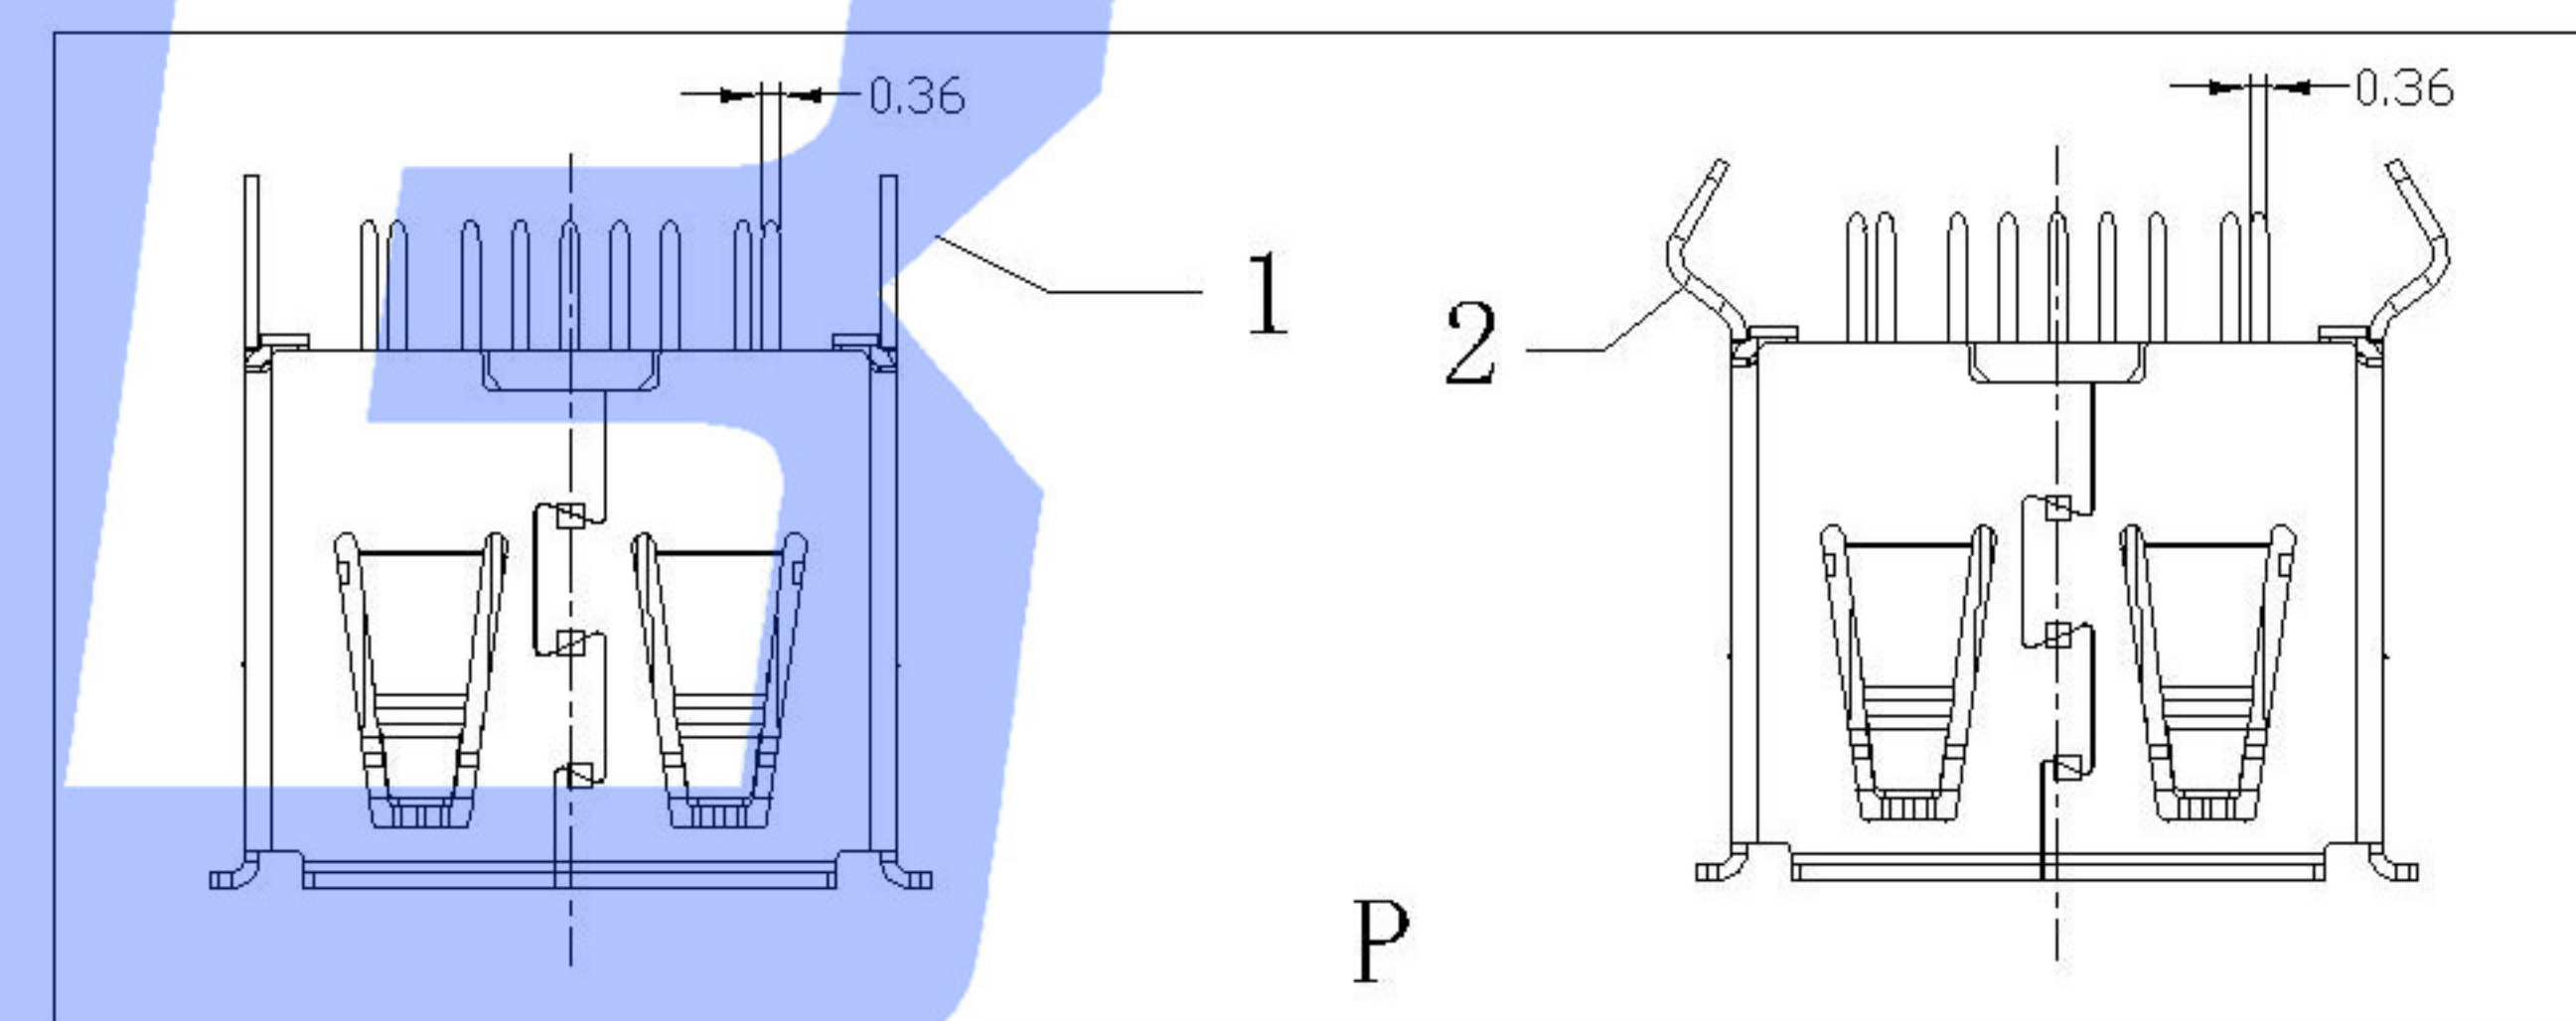

- NOTES:
1. ELECTRICAL:
1) CURRENT RATING: 1.8AMP;
2) INSULATION RESISTANCE: 100MΩ MIN;
3) CONTACT RESISTANCE: 50mΩ MAX;
4) WITHSTANDING VOLTAGE: 100V AC;
5) OPERATING TEMPERATURE: -55°C ~ +85°C
 2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN.
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

U233-09XN-XBLRC15-X-1-X

1: 1Au 10U*
5: 5Au 15U*
6: 6Au 30U*
T: TIN
N: NICKEL
P: 1 P: 2
1: SPCC 5: BRASS
S: Scrolls F: Flat
B: BLACK W: WHITE BL: BLUE
1: PBT
2: PA6T
3: PA9T
4: LCP

							DSND		DATE		SCALE: N/A	MODEL TYPE: USB 3.0		
△ X					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
△ X					L ≤ 4	±0.2	CHKD		DATE		UNIT: mm	DWG NO.:		
△ X					4<L ≤ 16	±0.3						U233-09XN-XBLRC15-X-1-X		
△ X					16<L ≤ 63	±0.4	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION		DATE	REVISED	APPROVED	L > 63	±0.5							
REVISIONS						UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn												1.0g	1/1	A0