





REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

(W/O COVER)

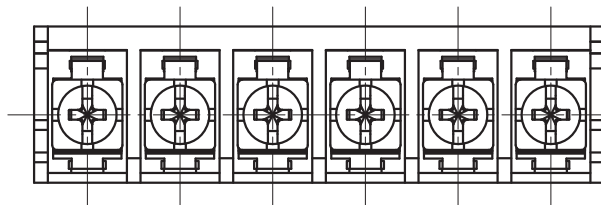

Color: Transparent

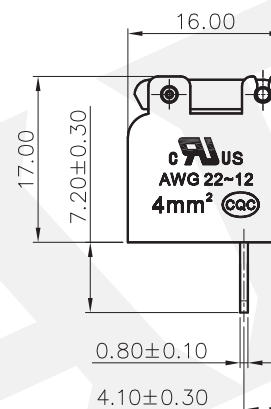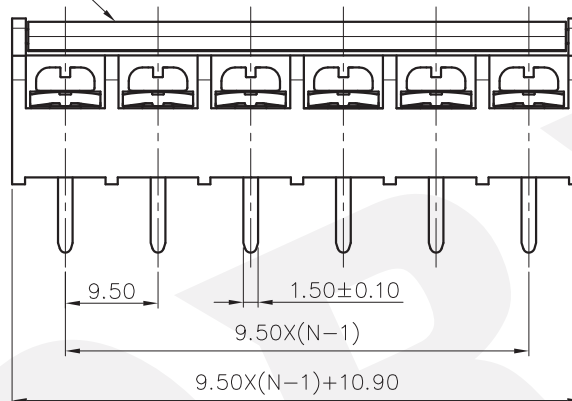

NOTES1:

UL Standard


- 1.Rated voltage/current : 300V / 20A
- 2.Torque value : M4 , 10.53Lb.in
- 3.Wire range : 22~12AWG

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 9.50mm, Poles : N=02~12P
- 3.Stripping length : 7~8mm
- 4.Withstanding voltage : AC1600V/1Min
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						0.1/10
TO	Over	TO	Over	TO	Over	TO	Over	
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	60 TO 100	100 TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

7.RoHS Compliance

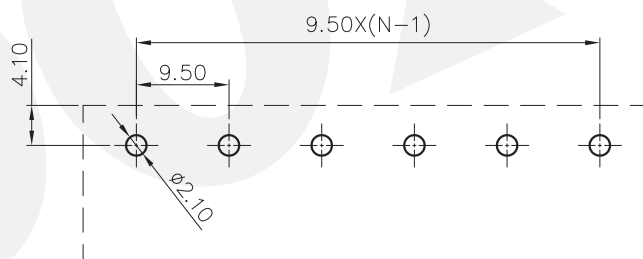

PCB LAYOUT

DBT50G-9.5 - XXP - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS	PART NO.: /		DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD			
	APPD: /		NAME: DBT50G-9.5-XXP-1Y-00A(H)			
	CHKD: /					
	DRFT: /		TITLE: CUSTOMER DRAWING		REV	DO
			DRAWING NO.: /		SHEET	1/1
THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING	SCALE	1:1

DORABO

慈溪市地博电子有限公司
CIXI DORABO ELECTRONICS CO.,LTD

DBT50G-9.5-XXP-1Y-00A(H)

TITLE: CUSTOMER DRAWING

REV

DO

DRAWING NO.:

SHEET

1/1

MM
(INCH)

DO NOT SCALE DRAWING

SCALE

1:1