
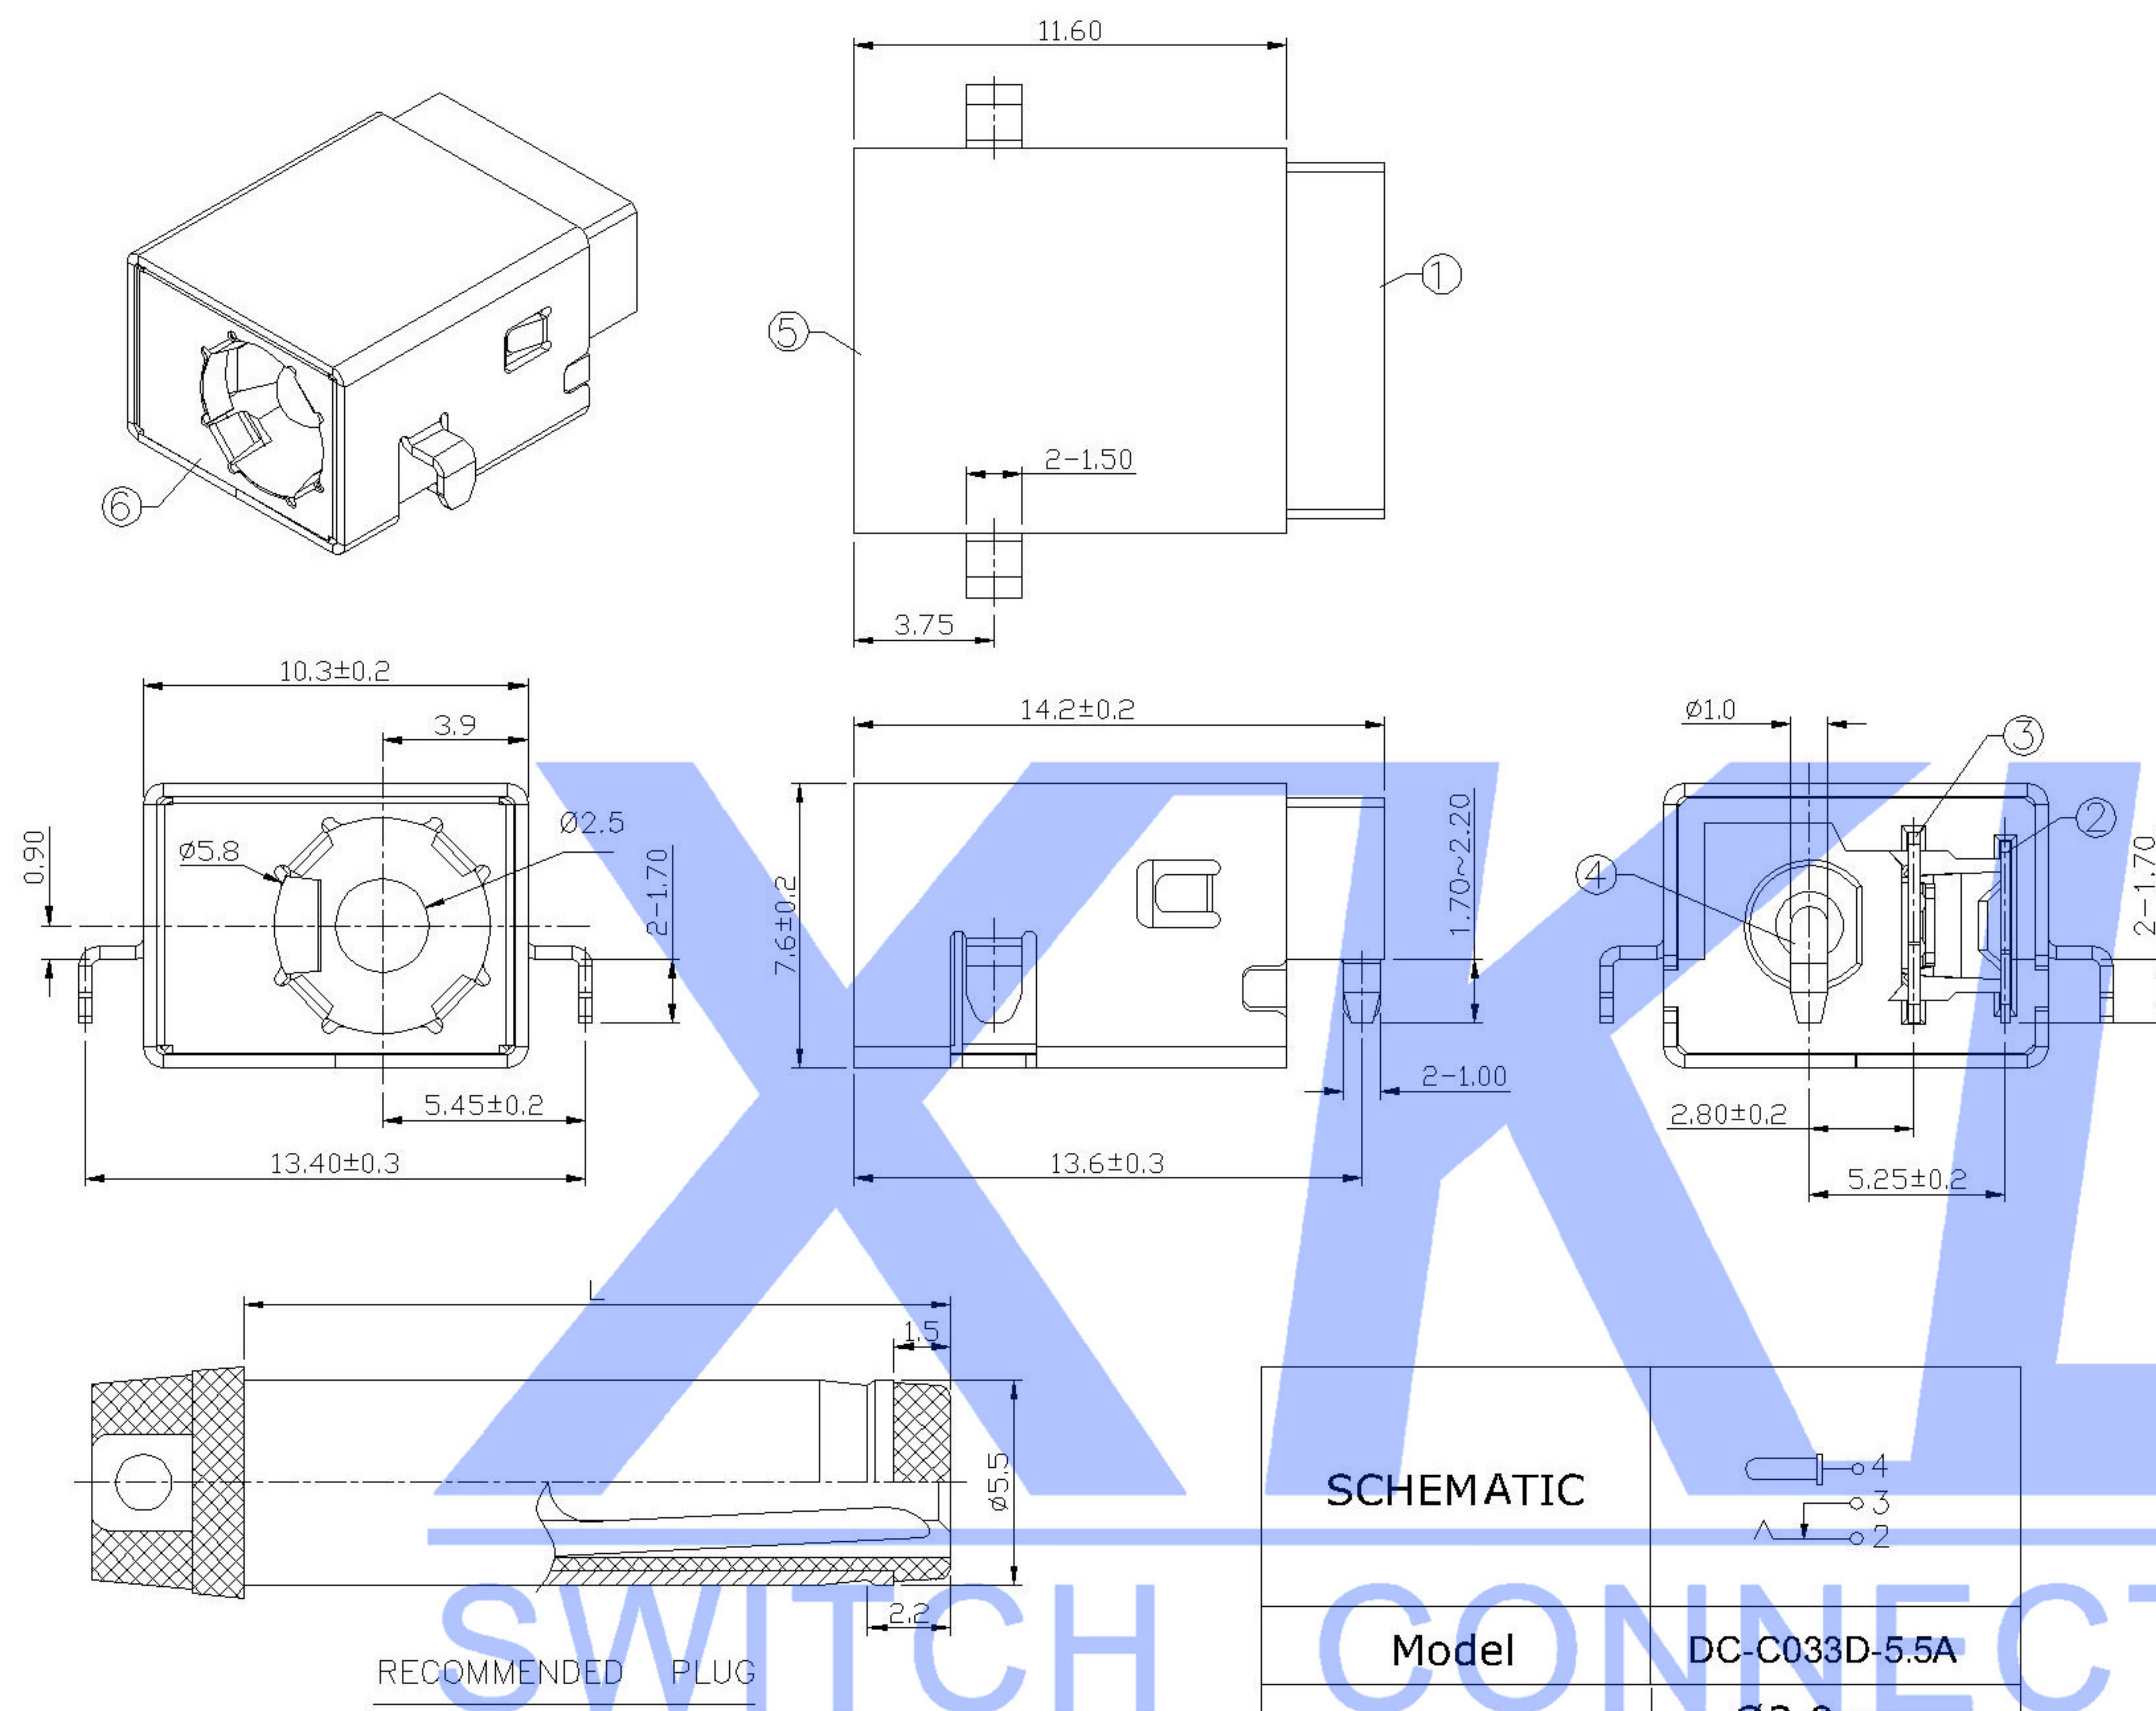




SPECIFICATION
1.Rating : DC 20V 5.5A;
2.Contact resistance: $\leq 0.03\Omega$;
3.Insulation resistance: $\geq 100M\Omega$
(DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction
force: 3-30N;
6.life test: 5,000 cycles.

SCHEMATIC	
Model	DC-C033D-5.5A
Center Pin	$\varnothing 2.0\text{ mm}$ $\varnothing 2.5\text{ mm}$

	MATERIAL	PLATING
center pin	Brass	tin
coat	Sus	
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
terminal 4	Brass	tin
terminal 5	Brass	tin
plastic	Pa9t	

							DSND		DATE		SCALE: N/A	MODEL TYPE: DC POWER JACK		
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
△X					X.X	±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.:		
△X					X.XX	±0.1mm						DC-C033D-5.5A-2.5		
△X					X.XXX	±0.05mm	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION			DATE	REVISED	APPROVED								
REVISIONS						UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn												1.0g	1/1	A0