
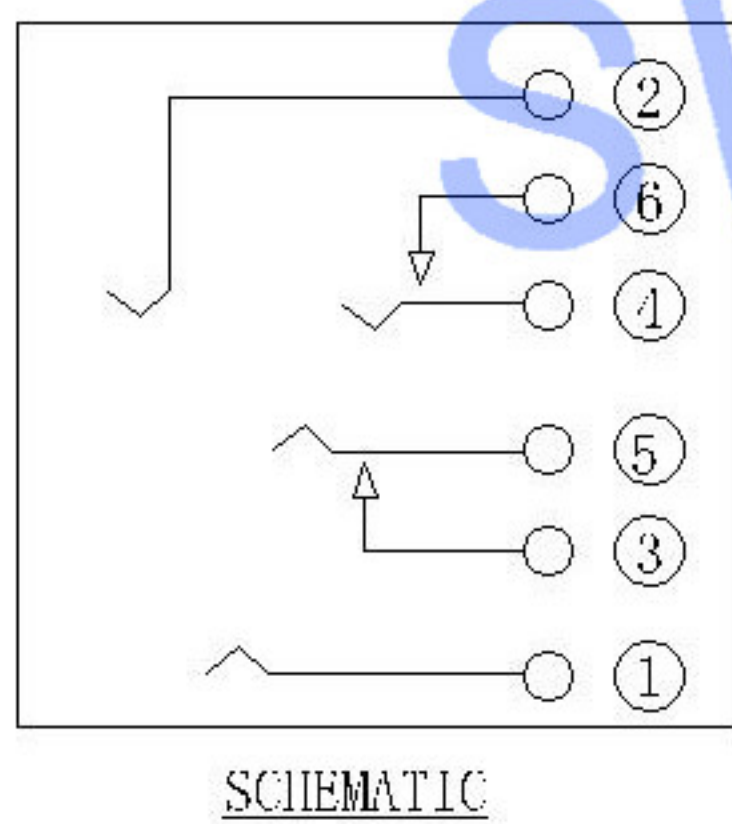


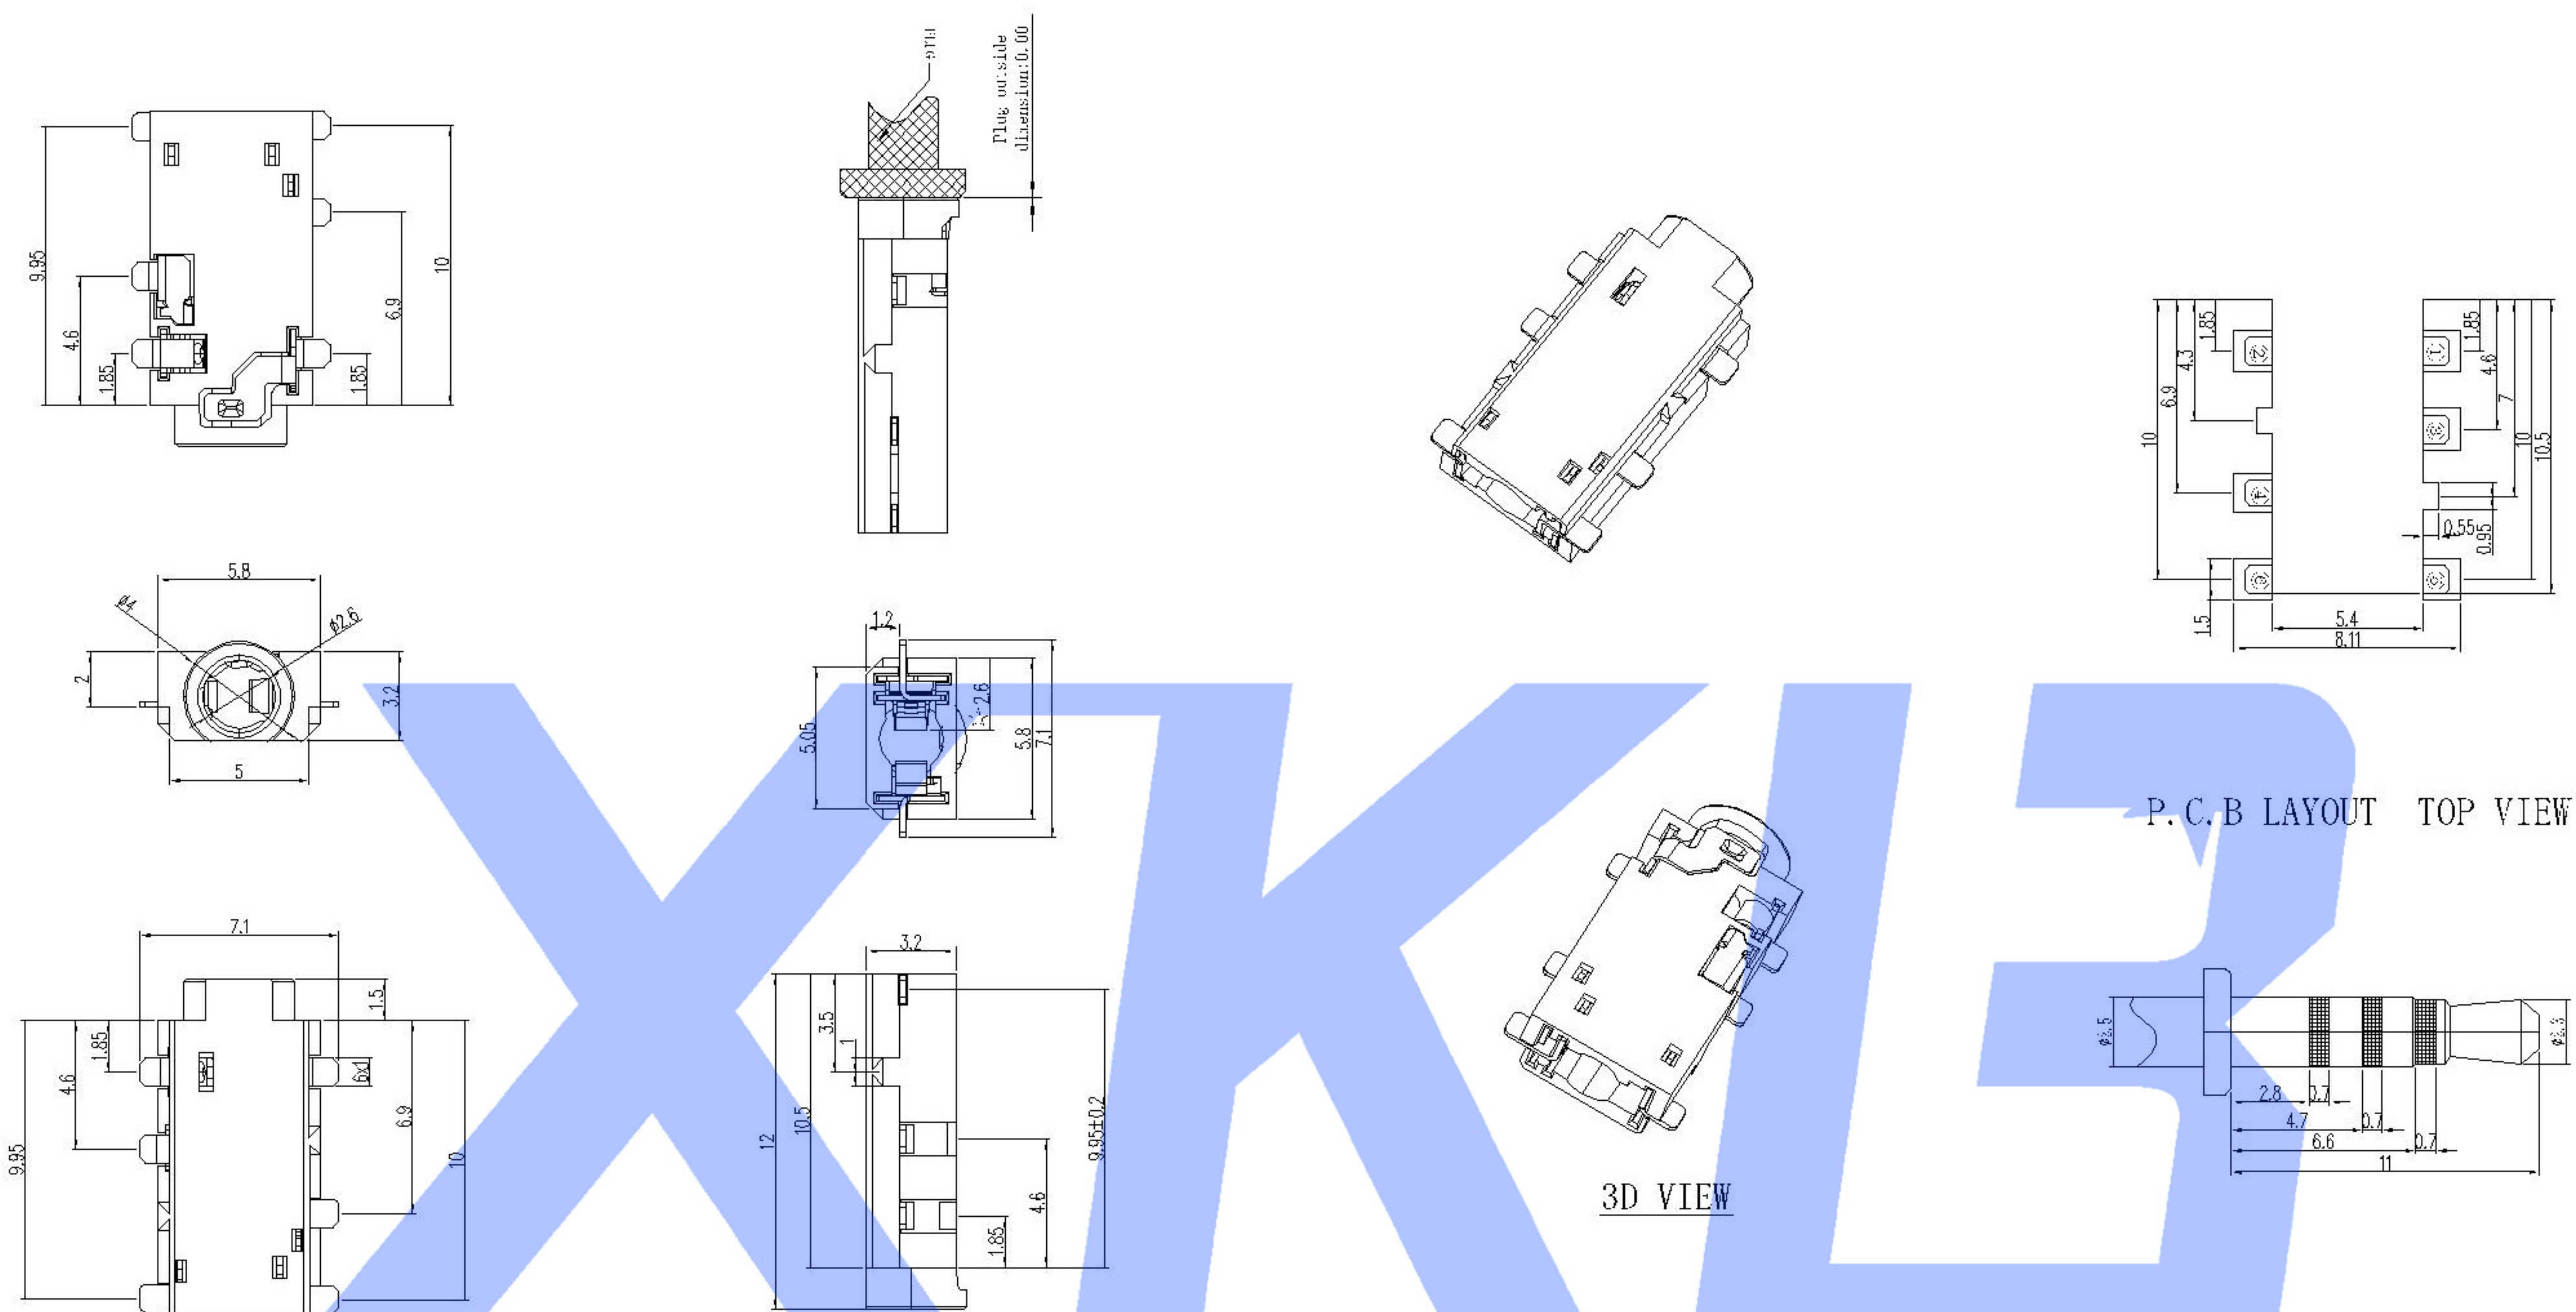

- NOTES:
1. REFER TO GWS025, REQUEST OF THE SPECIFICATION:
- (1) CONTACT RESISTANCE: 50mΩ MAX. ;
- (2) INSULATION RESISTANCE: 100MΩ MIN. ;
- (3) DIELECTRIC WITHSTANDING: 500V AC MIN. ;
- (4) DURABILITY: SEE TABLE B;
- (5) CONNECTOR MATING FORCES: 2.91~29.4N (0.3~3.00Kgf);
- (6) CONNECTOR UNMATING FORCES: 2.91~29.4N (0.3~3.00Kgf);

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	Gold
terminal 2	Phosphor Bronze	Gold
terminal 3	Phosphor Bronze	Gold
terminal 4	Phosphor Bronze	Gold
terminal 5	Phosphor Bronze	Gold
terminal 6	Phosphor Bronze	Gold
plastic	High Temp. Thermoplastic	

						DSND		DATE		SCALE: N/A	MODEL TYPE: 2.5 PHONE JACK
△ X						ANGLAR	±5°	DWN		VIEW:	PART NO.:
△ X						X.X	±0.2mm	CHKD		UNIT: mm	DWG NO.:
△ X						X.XX	±0.1mm	APPD		SIZE: A4	PJ-2065-SMT
MARK	DESCRIPTION	DATE	REVISED	APPROVED		X.XXX	±0.05mm				
REVISIONS						UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT 1.0g
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn											SHEET 1/1
											REVISION A0