



MAPX	MODIFICATION	DRW	DATE

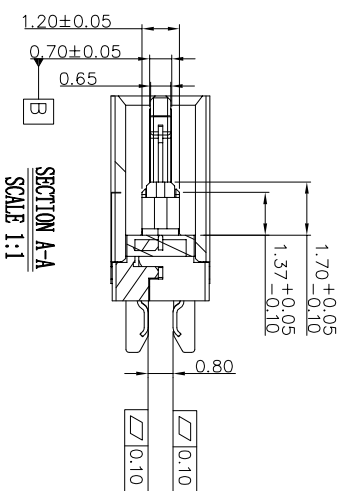

SECTION A-A
SCALE 1:1



NOTES:


1. MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATING ALL OVER 50u" Min NICKEL
AND 100u" Min Tin ALL OVER 50u" Min NICKEL
ON SOLDER AREA
SHELL: SUS304-H,T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
SHLD: SUS304-H,T=0.12±0.03mm
2. MECHANICAL:
INSERTION: 5~20N.

2. MECHANICAL:
 INSERTION: 5~20N.
 EXTRACTION: 8~20N AFTER TEST .
 DURABILITY: 10000 CYCLES

3. ELECTRICAL:
 CURRENT: 5A FOR VBUS;
 1.25A FOR GND PIN.
 0.25A FOR OTHER.

VOLTAGE: 20 V MAX
 WITHSTANDING VOLTAGE: 100V AC R.M.S
 CONTACT RESISTANCE: 40mΩ MAX.
 INSULATION RESISTANCE: 100MΩ MIN.

4. ENVIRONMENTAL
 TEMPERATURE RANGE -55°C ~ +85°C

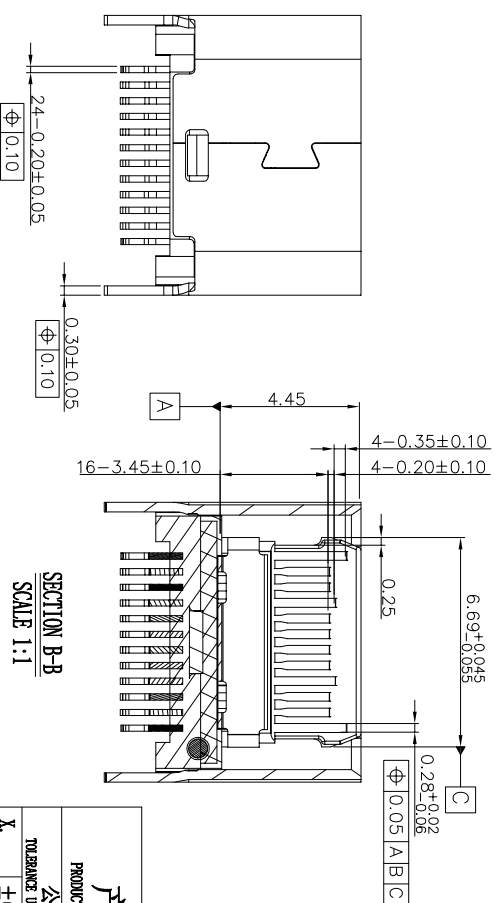

SECTION B-B
SCALE 1:1

产品图									
PRODUCT CHART IMG									
公差一览表									
TOLERANCE (UNLESS OTHERWISE SPECIFIED)		单位	制图	制图料号					
X	±0.25	MM	DRAWING	YANG	PRODUCT PART NO.				
.X	±0.20	比例	审核	郭治富	PRODUCT NAME				
.XX	±0.15	SCALE	CHCK		CONNECTOR H=6.5				
.XXX	±0.10	日期	核准	黄国荣	角法		版本		
	±0.5°	DATE	2019-11-07						VER
					A0				