


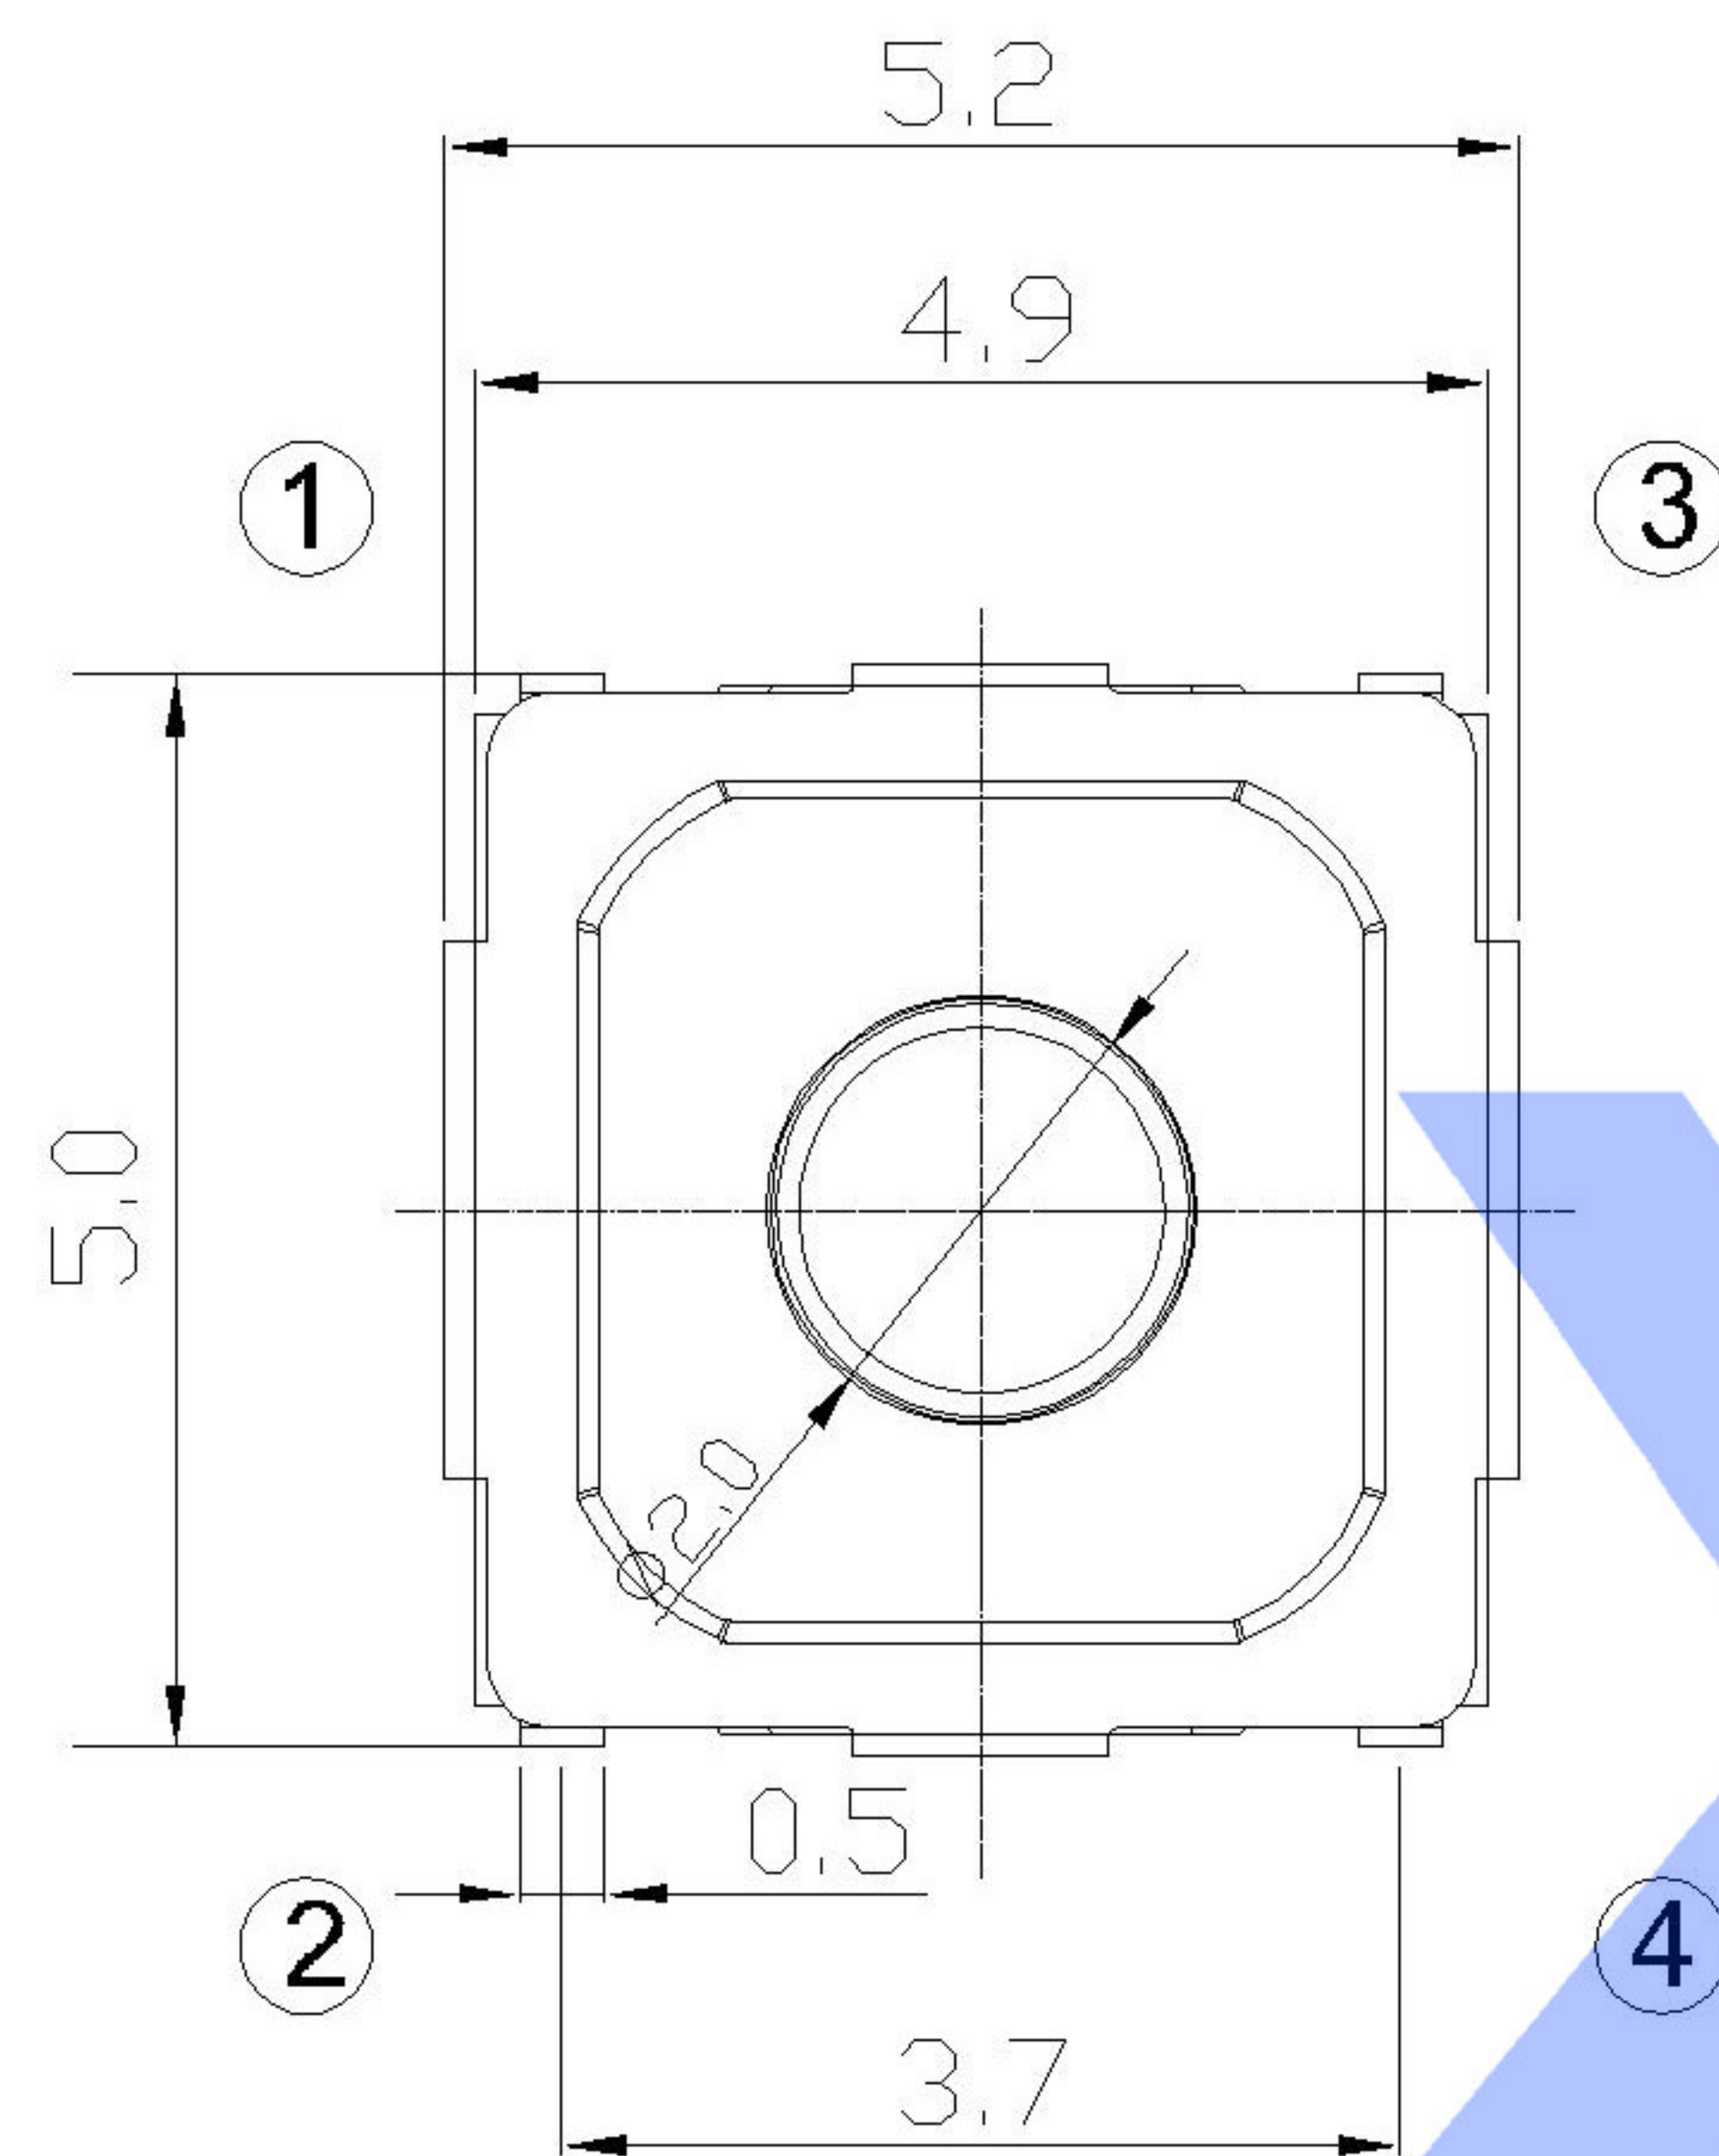


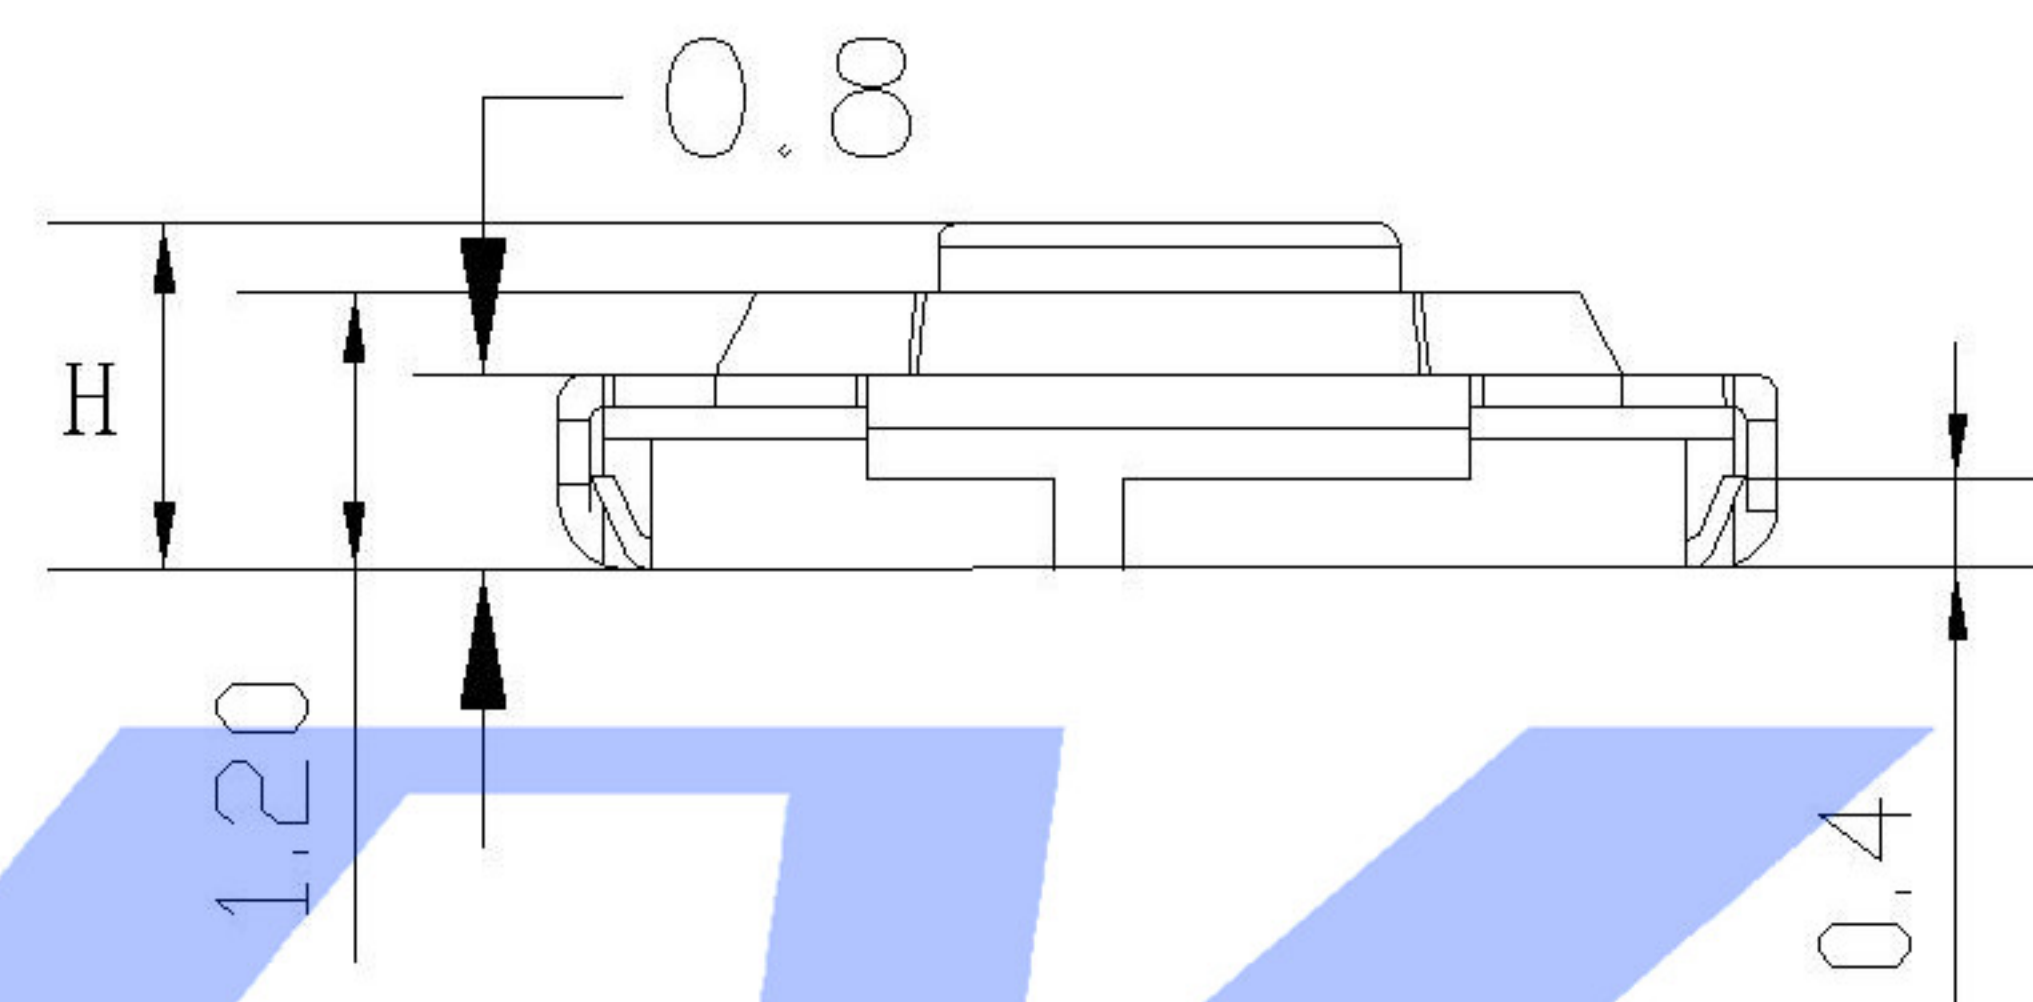

Circuit Diagram

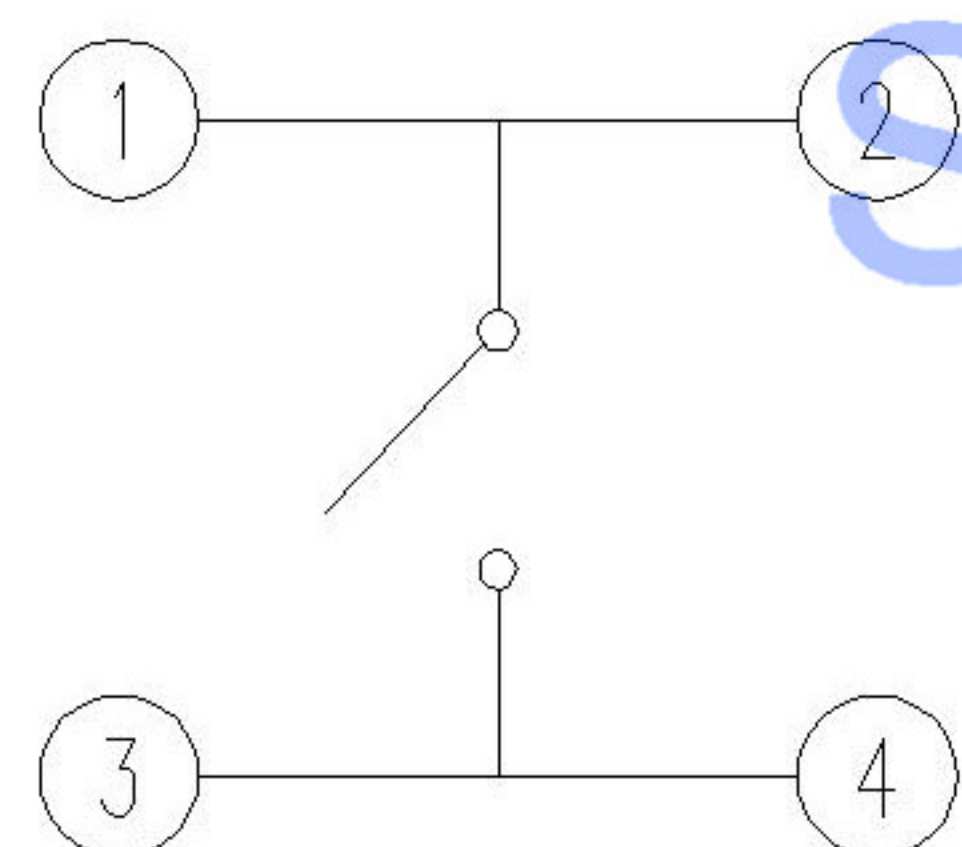

P.C.B. Layout

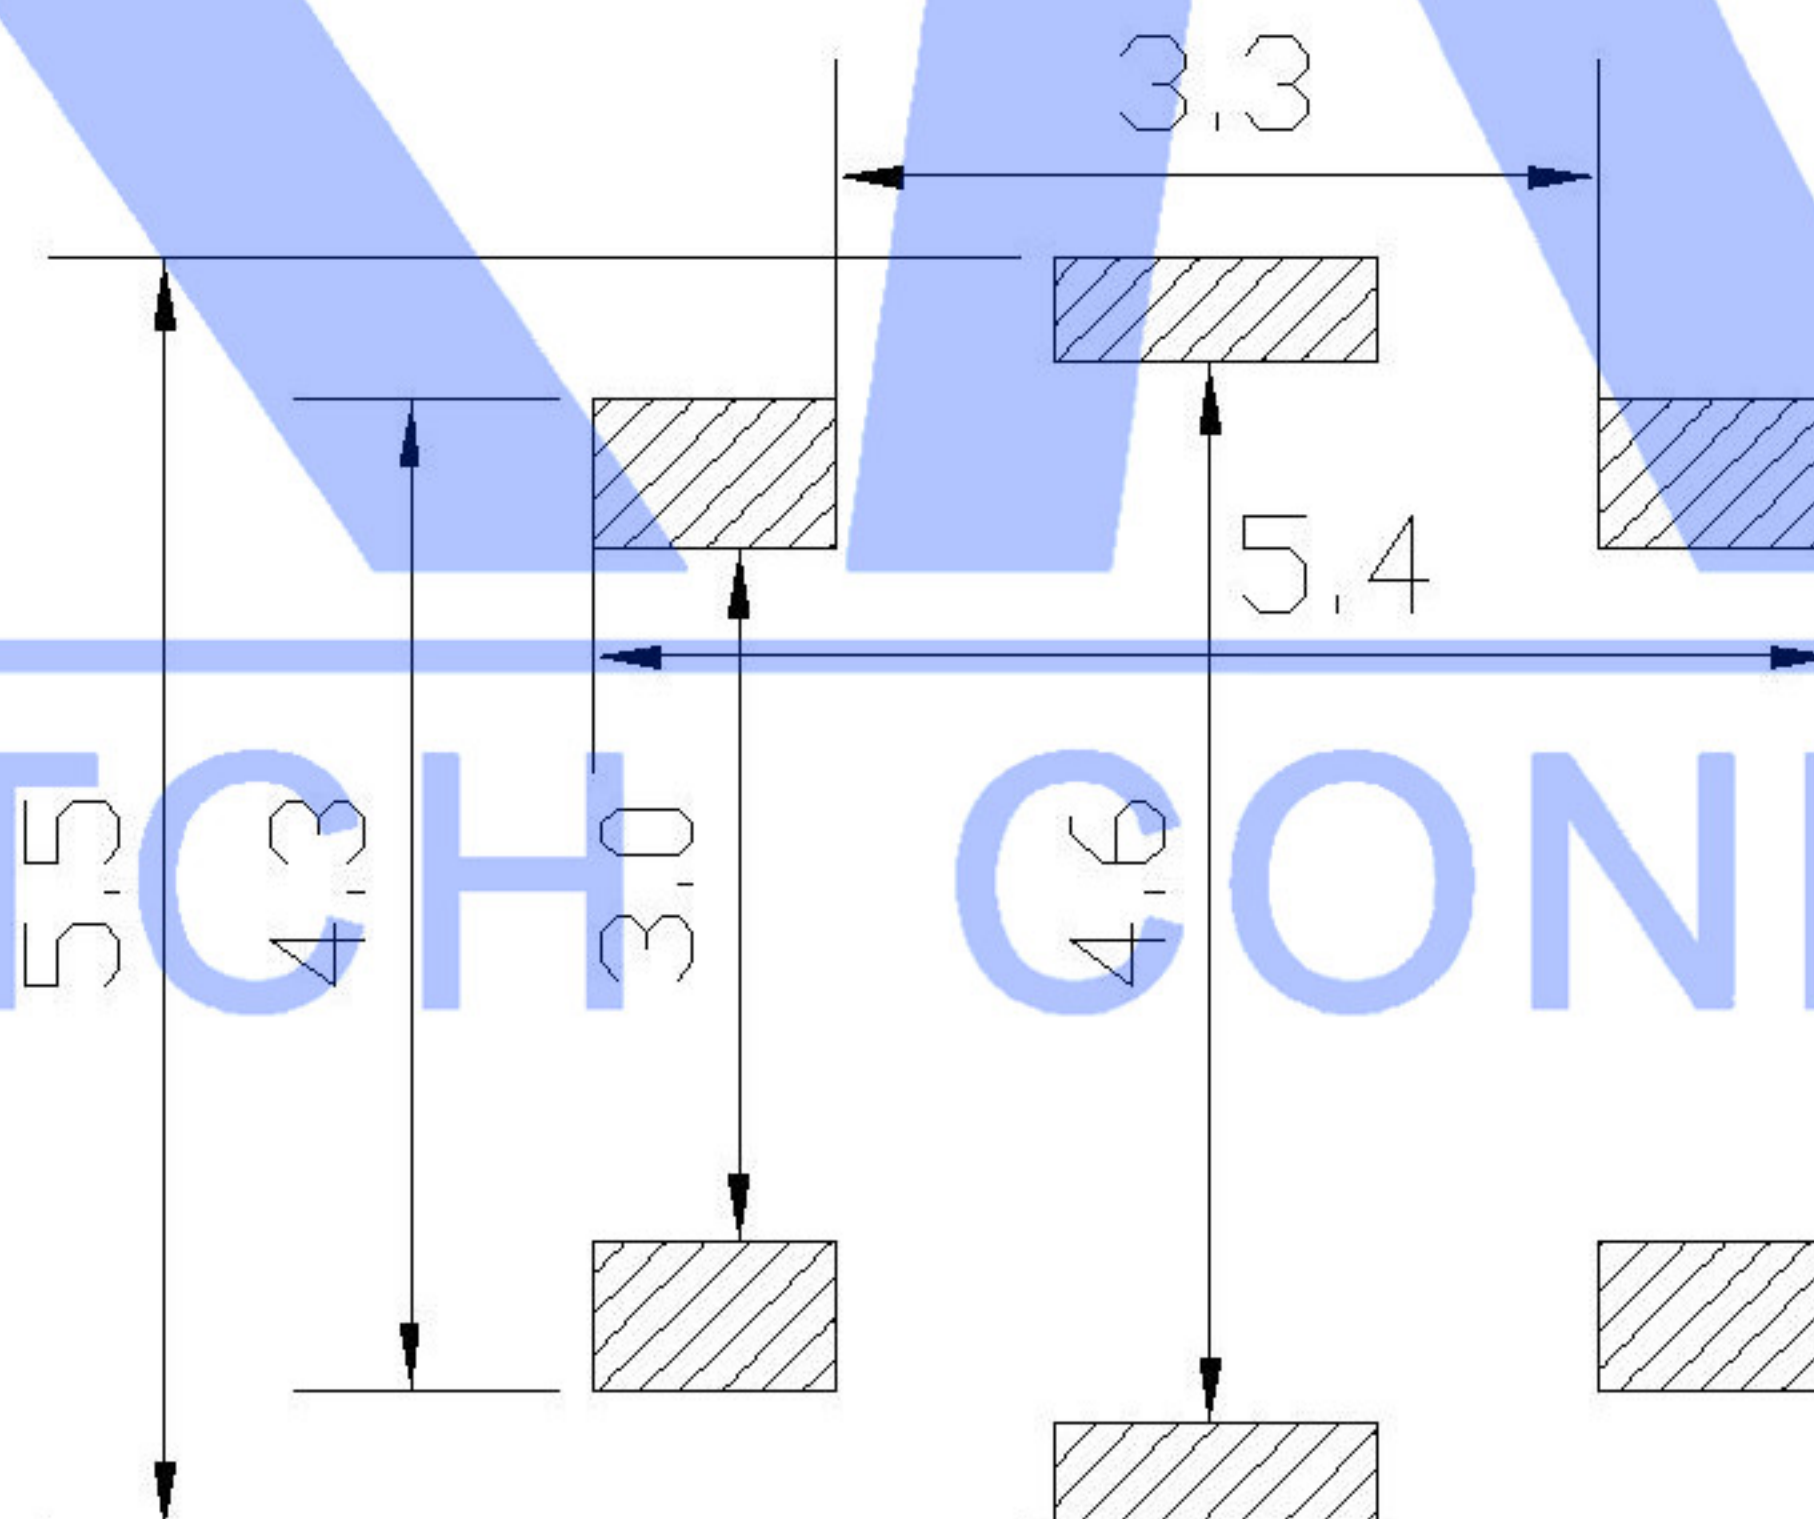

SPECIFICATION

Contact Rating: 50mA, 12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100mΩ min. 500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.25mm
Operating Temp: -30℃~+85℃
Storage Temp: -30℃~+80℃

Code-X	H
A	1.5
B	1.6
C	1.7
D	2.0
E	2.5
F	3.0
G	3.5
H	4.0
I	4.3
J	4.5
K	5.0

PAPT NO	TS-1187E-X-X-X
Operating Force	A: 100gf B: 160gf C: 260gf
Height	Code-X
Keystake	A: PA16 B: Brass

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Lcp		—
②	Cover	—	1	Brass	Plating Nickel	—
①	Keystake	—	1	Brass		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
△X					X.X ±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.:		
△X					X.XX ±0.1mm	APPD		DATE		SIZE: A4	TS-1187E-X-X-X		
△X					X.XXX ±0.05mm								
MARK	DESCRIPTION		DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES							
REVISIONS						XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn											1.0g	1/1	A0