


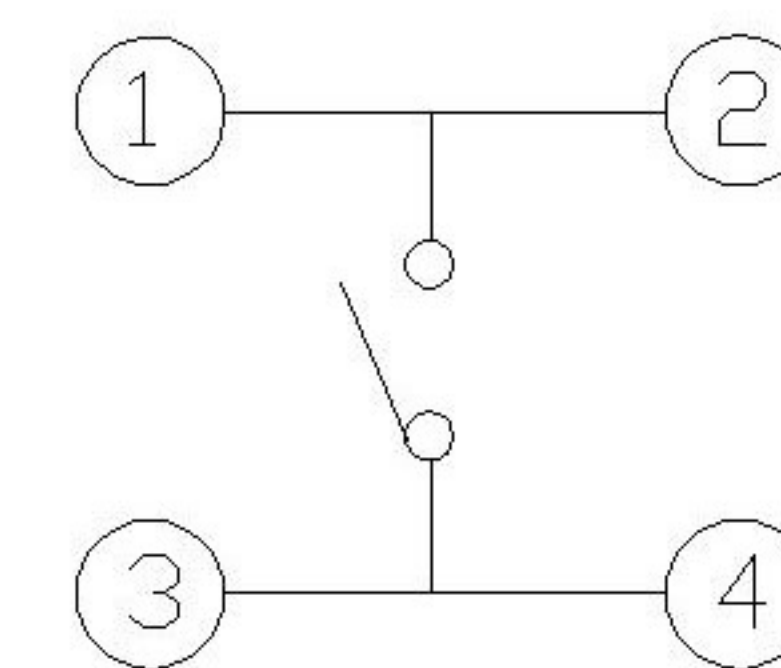

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃ ~ +85℃
Storage Temp:	-30℃ ~ +80℃

PAPT NO	TC-1102T-X
operating force	A:100gf B:180gf C:260gf
Height	H: 7.3

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
△ X					tolerance:	CHKD		DATE		UNIT: mm	DWG NO.:		
△ X					X.X ±0.2mm						TC-1102T-X		
△ X					X.XX ±0.1mm	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm								
REVISIONS					UNSPECIFIED TOLERANCES	XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g	SHEET 1/1	REVISION A0
www.xk-dq.cn www.helloxkb.com www.helloxkb.cn													