

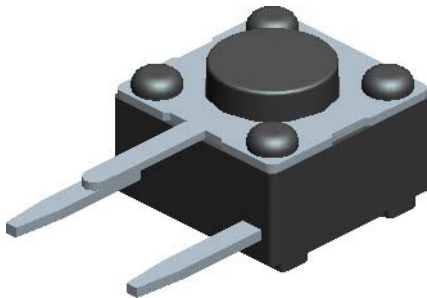

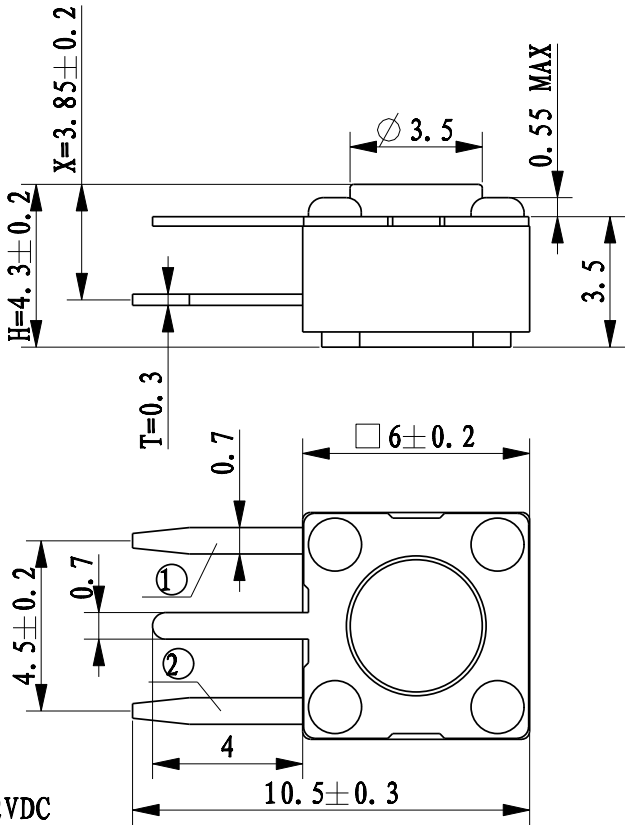


REVISION	A
----------	---

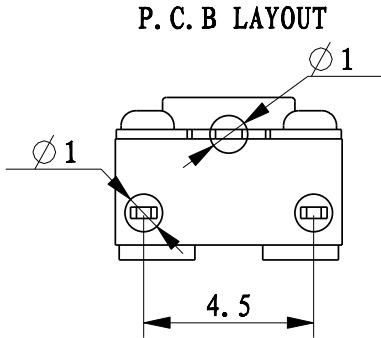

- 技术参数**
1. 额定电流: 50mA 12VDC
 2. 接触电阻: 100mΩ
 3. 按 力: 160±30gf
 4. 行 程: 0.25±0.1mm
 5. 绝缘电阻: 100MΩ
 6. 抗电强度: 100v 50Hz 1Min
 7. 寿 命: 100,000 次



A (mm)	Ø (mm)	H (mm)
3.15	3.5	4.3
3.35	3.5	4.5
3.85	3.5	5.0
4.35	3.5	5.5
4.85	3.5	6.0
5.35	3.3	6.5
5.85	3.4	7.0
6.35	3.3	7.5
6.85	3.3	8.0
7.35	3.3	8.5
7.85	3.1	9.0
8.35	3.1	9.5
8.85	3.1	10.0
9.35	3.0	10.5
9.85	3.0	11.0
10.35	3.0	11.5
10.85	3.0	12.0
11.35	3.0	12.5
11.85	3.0	13.0
12.35	3.0	13.5
12.85	3.0	14.0
13.35	3.0	14.5
13.85	3.0	15.0
14.35	3.0	15.5
14.85	3.0	16.0
15.85	3.0	17.0

TITLE	TACT SWITCH		DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED				
PRODUCT NO.	TS-KG02VA		CHECKED						
DRAWING NO.	GEFU-KG02VA		APPROVED		TOLERANCE	± 0.2			
SCALE	5:1	UNIT	mm	DATE	ANGLE TOL	± 1°			
GEFU® GEFU ELECTRONIC CO., LTD									
							NO.	PARTS	MATERIAL
									QTY