


目錄 MAPX	變更內容 MODIFICATION	日期 DATE

NOTES:

- Housing: Thermoplastics,UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating:1.5 AMP. 30V AC
Insulation Resistance:1000M Ω Min.
Contact Resistance: 30 M Ω Max.
Dielectric Withstanding Voltage:500W AC
Temperature Range:-35°C to +85°C
Insulator color: Black/White
Plastic material:PBT/LCP/Others
Shell finish:Nickel plated/Tin-Lead plated
Mechanical:
Mating Force:3.5KG MAX
Umating Force:0.7 KG MIN.
Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U”
03: Selective Gold 5U”
04: Selective Gold 15U”
05: Selective Gold 30U”

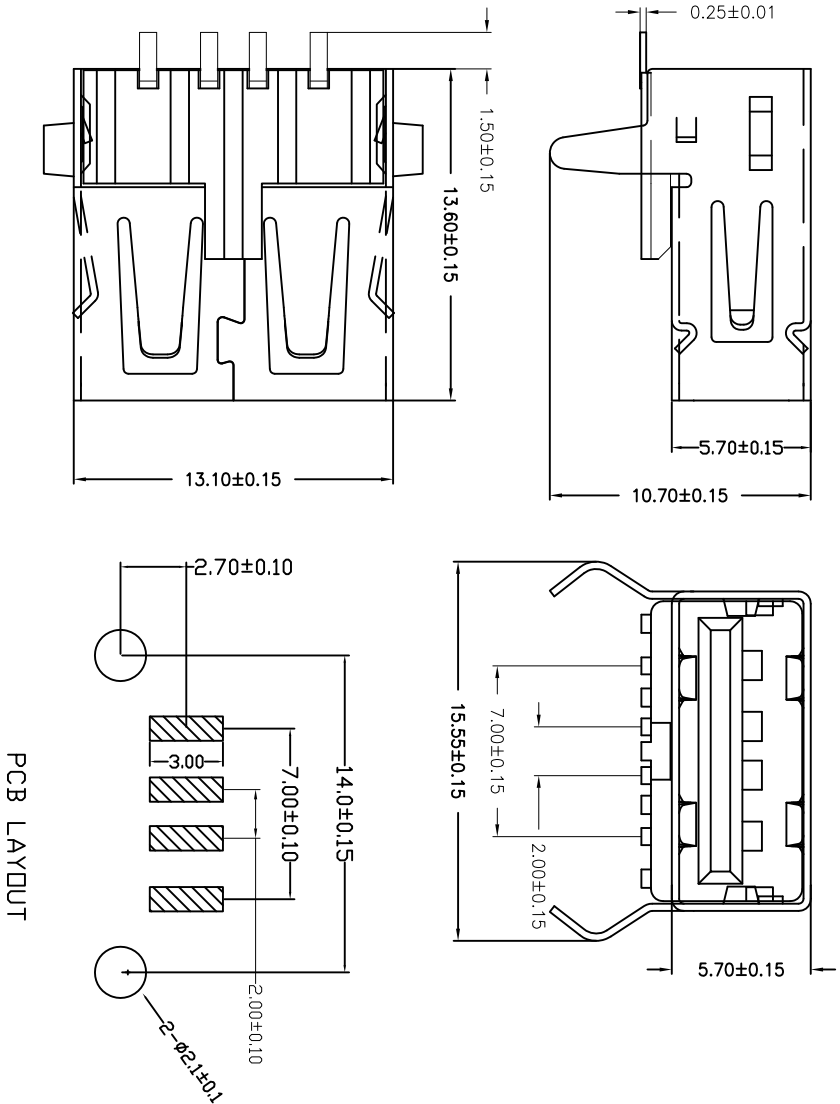

备注：侧弹分为外弹与内弹

产品图
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS				制图 DRAWING				产品料号 PRODUCT PART NO.			
X	±0.25	X'	±5°	X	±0.25	X'	±5°	X	±0.25	X'	±5°	X	±0.25	X'	±5°
.X	±0.15	.X'	±2°	.X	±0.15	.X'	±2°	.X	±0.15	.X'	±2°	.X	±0.15	.X'	±2°
.XX	±0.10	.XX'	±1°	.XX	±0.10	.XX'	±1°	.XX	±0.10	.XX'	±1°	.XX	±0.10	.XX'	±1°
.XXX	±0.10	.XXX'	±0.5°	.XXX	±0.10	.XXX'	±0.5°	.XXX	±0.10	.XXX'	±0.5°	.XXX	±0.10	.XXX'	±0.5°