

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

DB910 - 6.35 - XXP - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch)
(Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)
6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 30A
- 2.Torque value : M3 , 4.43Lb.in
- 3.Wire range : 26~10AWG

IEC Standard





- 1.Rated voltage/current : 450V / 24A
- 2.Torque value : M3 , 0.5N·m
- 3.Wire range : 1.5~4.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.35mm, Poles : N=02~24P
- 3.Stripping length : 8mm
- 4.Withstanding voltage : AC2500V/1Min.
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						—	∩	∇
To	Over		To	Over	Over	Over	Over		0.1/10		
6	6	10	30	30	60	100	150	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.30	±2'		

7.RoHS Compliance

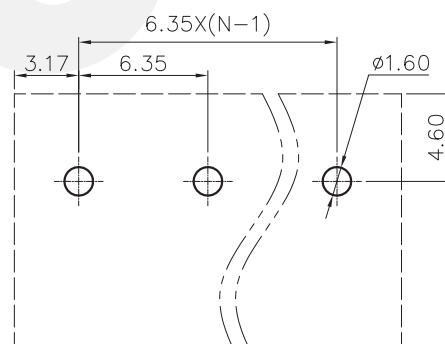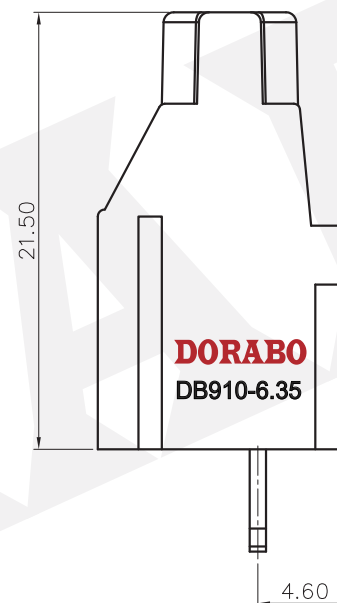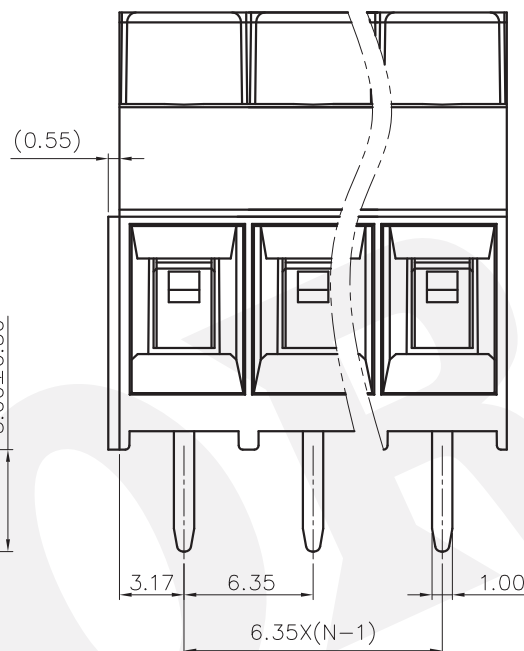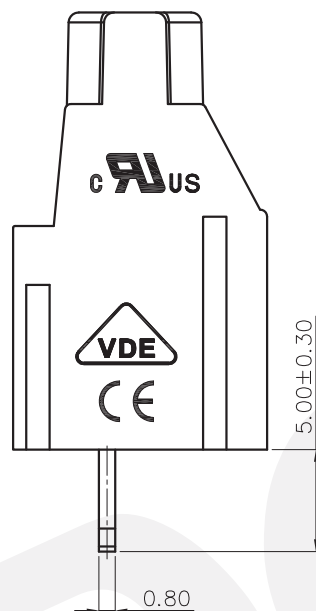

PCB LAYOUT

DETACHED LISTS	PART NO.:	DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD			
	APPD:	NAME: DB910-6.35-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
	THIRD ANGLE PROJECTION		SHEET	1/1	
		MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1