

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated Voltage/Current : 300V / 15A
- 2.Torque Value : M2.5 , 2.60Lb.in
- 3.Wire Range : 22~14AWG

IEC Standard

- 1.Rated Voltage/Current : 250V / 17.5A
- 2.Torque Value : M2.5 , 0.29N.m
- 3.Wire Range : 0.75~1.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.0mm, Poles : N=02~24P
- 3.Stripping length : 5~6mm
- 4.Withstanding Voltage : AC2000V/1Min.
- 5.Operating temperature : -30°C~+120°C
- 6.Undimensioned Tolerances:


Pitch Range In mm		Nominal Dimension Range In mm					
To	Over	To	Over	To	Over	To	
6	10	30	60	100	150		0.1/10
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2°




7.RoHS Compliance

DB301V- 5.0 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

(RoHS)
00A-(Standard)

DETACHED LISTS	PART NO.: /	DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD			
	APPD: /	NAME: DB301V-5.0-XXP-1Y-00A(H)			
	CHKD: /				
	DRFT: /	TITLE: CUSTOMER DRAWING		REV	DO
		DRAWING NO.: /		SHEET	1/1
			DO NOT SCALE DRAWING	SCALE	1:1
	THIRD ANGLE PROJECTION				

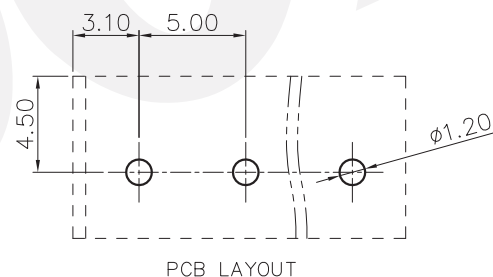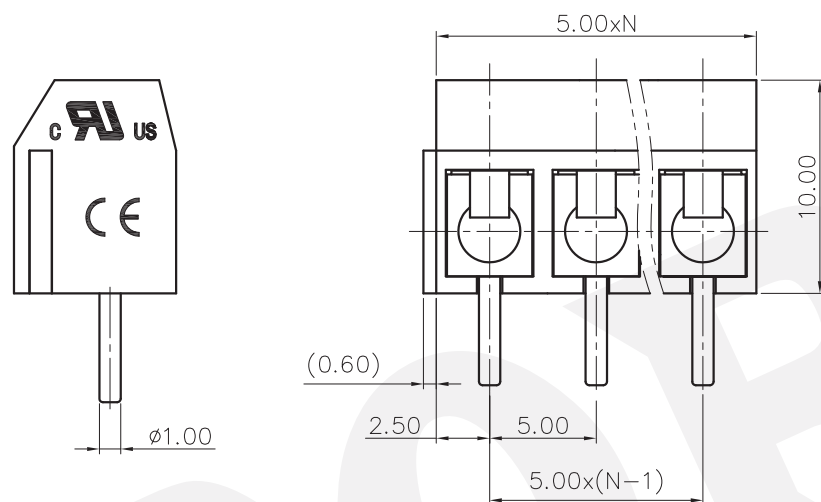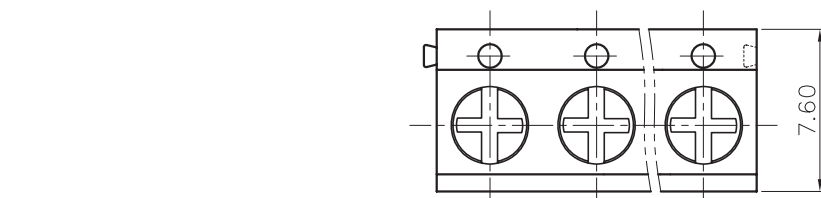

THIRD ANGLE PROJECTION