
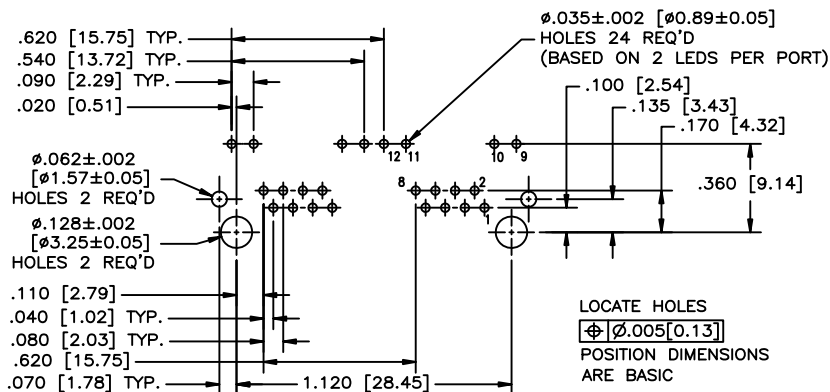
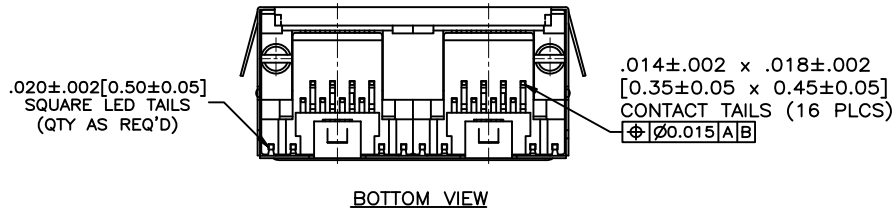
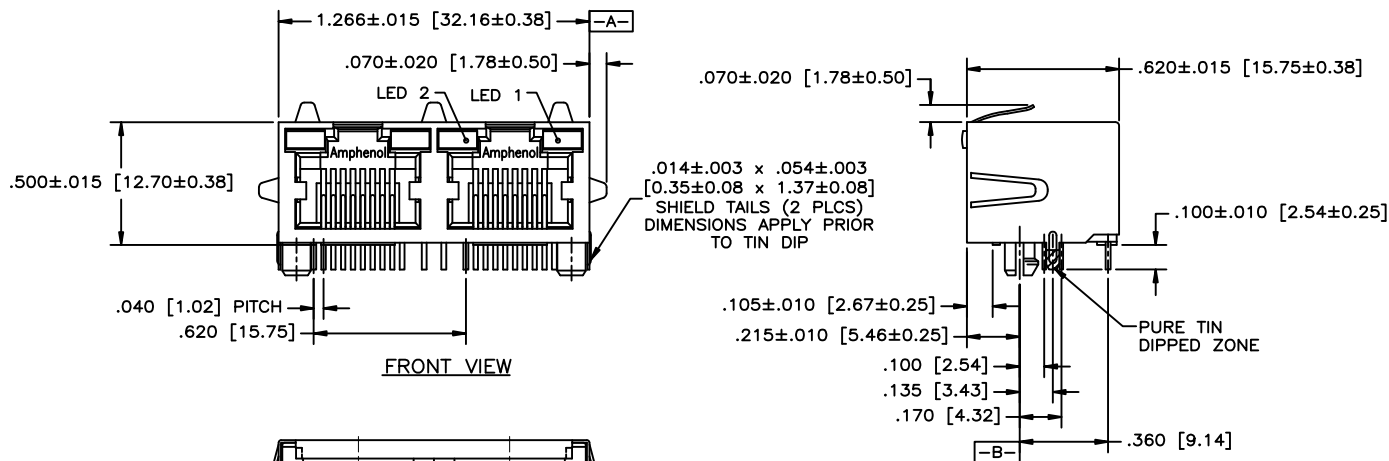
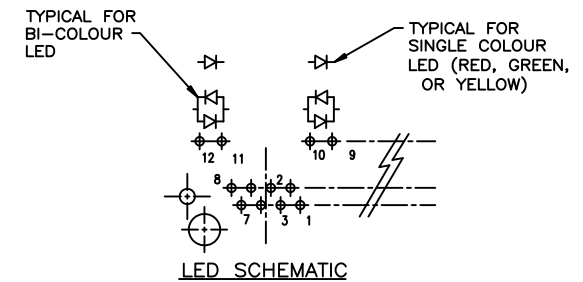


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
E		PRODUCT DRAWING	FEB2/12	K.L.

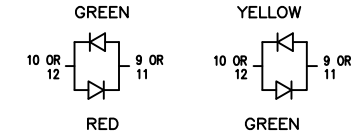

MATERIALS:
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0

CONTACTS:
 PHOSPHOR BRONZE
 PLATING: 50 μ [1.27 MICRONS]
 MIN. GOLD ON MATING SURFACES.
 50 μ [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.

SHIELD:
 COPPER ALLOY
 PLATING: NICKEL WITH PURE-TIN DIPPED PCB TAILS

AMPHENOL PART NUMBER: RJHSE-L38X-02

REFER TO AMPHENOL CATALOGUE
FOR LED COLOUR OPTIONS

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN PWANG	DATE 05/12/29	Amphenol Canada Corp.		
DESIGNED				
CHECKED CHIGOW	05/12/29			
I. E. APPRD.				
Q. A. APPRD.				
DWG. APPRD.				
ENG. REL. NO.				
REF.				
DIMENSIONS ARE IN INCHES (mm)	CODE ID. NO. 03554			
SCALE	WT.	SURF.	SHEET 1 OF 1	

TITLE
2 PORT HIGH SPEED RJ45 MODULAR JACK
LOW PROFILE, 8 POSITION, 8 CONTACTS
SHIELDED, WITH LEDS, - RoHS COMPLIANT

DWG. DRAWING NO. P-RJHSE-L38X-02 REV. E