




GENERAL TOLERANCE

DIM. RANGE	0.5 - 3	>3-6	>6-30	>30-120	>120-400
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5

REVISIONS		
REV.	DESCRIPTION	DATE
PA1	NEW RELEASE	2016-11-03

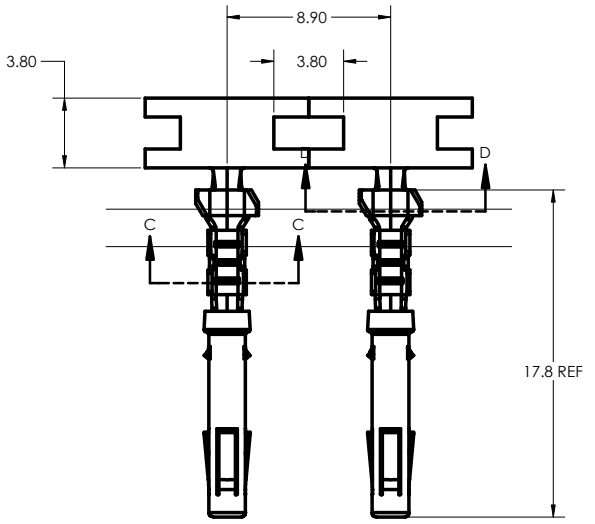

CONTACT NUMBER	CONTACT BODY PLATING SPEC.
10-738775-201	TIN PLATING OVER NICKEL
10-738775-202	NICKEL PLATING
10-738775-203	GOLD FLASH OVER NICKEL
10-738775-204	GOLD FLASH OVER NICKEL THEN WITHIN THE RANGE OF HEAD PLATING 10u" GOLD
10-738775-205	GOLD FLASH OVER NICKEL THEN WITHIN THE RANGE OF HEAD PLATING 30u" GOLD

1. THE REFERENCED PRODUCT IS IN COMPLIANCE WITH THE MAXIMUM CONCENTRATION VALUES (MCV'S) AS SET BY ROHS 2.0 DIRECTIVE 2011/65/EU AND ANNEX II AMENDMENT DIRECTIVE (EU)2015/863.

NOTES:

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM THE AMPHENOL CORP.

UNLESS OTHERWISE SPECIFIED	APPROVALS		DATE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS	PREPARED BY:	Peter Ling	Nov-03-16	
TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE	ENGINEER IN CHANGE:	Peter Ling		
DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; OTHER AMPHENOL STANDARDS: 9-3800	DESIGN MANAGER:	Ran Xiao		
LEGENDS: △=FLAG NOTE CALL OUT REFERENCE	PRODUCT GROUP:	C&3		
THIRD ANGLE PROJECTION	AIPG DIVISION:			
	MATERIAL SPEC	N/A	PROCESS SPEC	N/A

AMPHENOL INDUSTRIAL OPERATIONS			
Amphenol Technology (Zhuhai) Co., Ltd No.63, Xingnan Road, Sanzao Town, Jinwan, Zhuhai, PRC			
SOCKET ASSEMBLY, AWG 20-22 SIZE20			
SIZE	CAGE CODE	DOCUMENT NUMBER	REV
C	77820	10-738775-20()	PA1
SCALE: 1:1	REF:	N/A	SHEET 1 OF 1

10-738775-20()
SHEET 1 OF 1
REV. PA1

C

B

A

D

C

REV. PA1
SHEET 1 OF 1
DOCUMENT NO. 10-738775-20()

A