
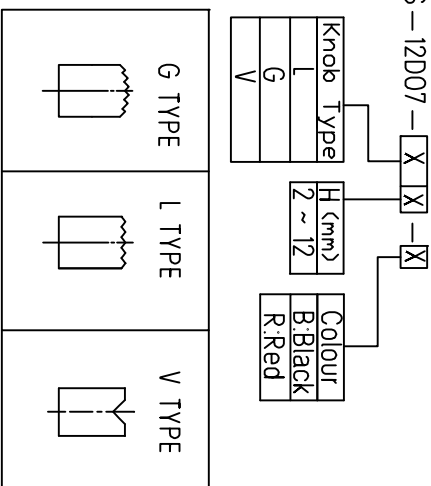
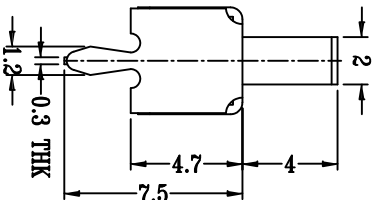


SCHMATIC (NON-SHORTING)

P.C.B LAYOUT
BOTTOM VIEW

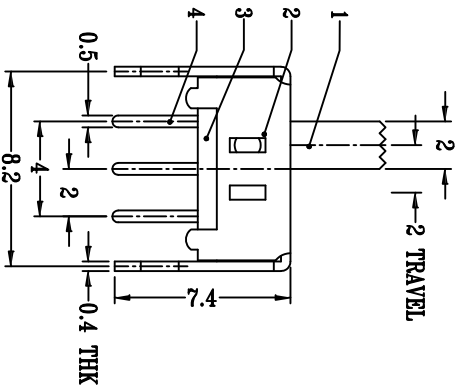

④	Terminal	3	Brass (0.30t)	ag Plated	
③	Base	1	Phenolic Resin		
②	Cover	1	Sus	Natural	
①	Keystake	1	Pa66	Black	
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING
					REMARK

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100m MAX.
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

						ANGULAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
ΔX						L ≤ 4	±0.2	DWN		DATE		VIEW:	PART NO.: SS-12D07
ΔX						4 < L ≤ 16	±0.3	CHKD		DATE		UNIT: mm	
ΔX						16 < L ≤ 63	±0.4						
MARK						L > 63	±0.5	APPD		DATE		SIZE: A4	DWG NO.: SS-12D07-X-X
REVISIONS							UNSPECIFIED TOLERANCES	XKB INDUSTRIAL PRECISION CO., LIMITED					
DESCRIPTION							DATE	REVISED	APPROVED	WEIGHT SHEET REVISION			
www.xk-dg.cn www.1k0k.com www.1k0k.cn										1.0g	1/1	A0	