


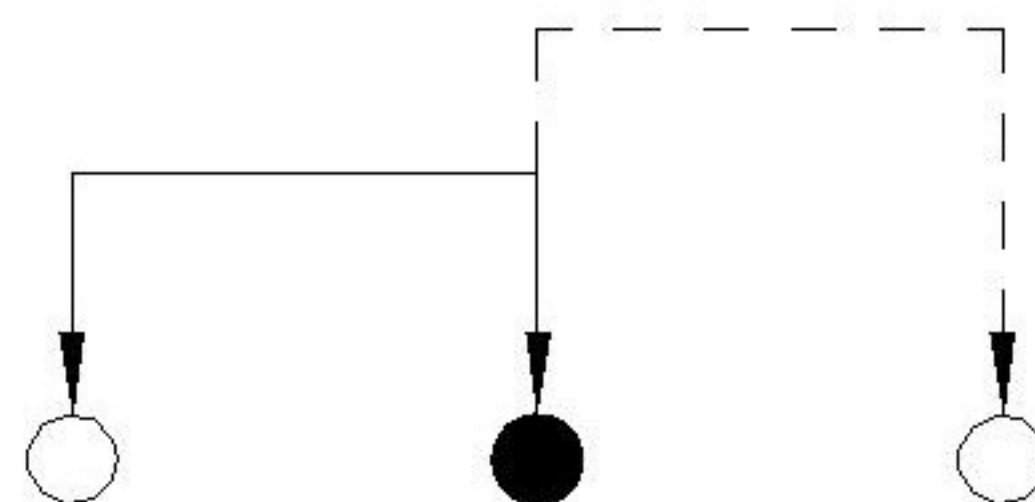
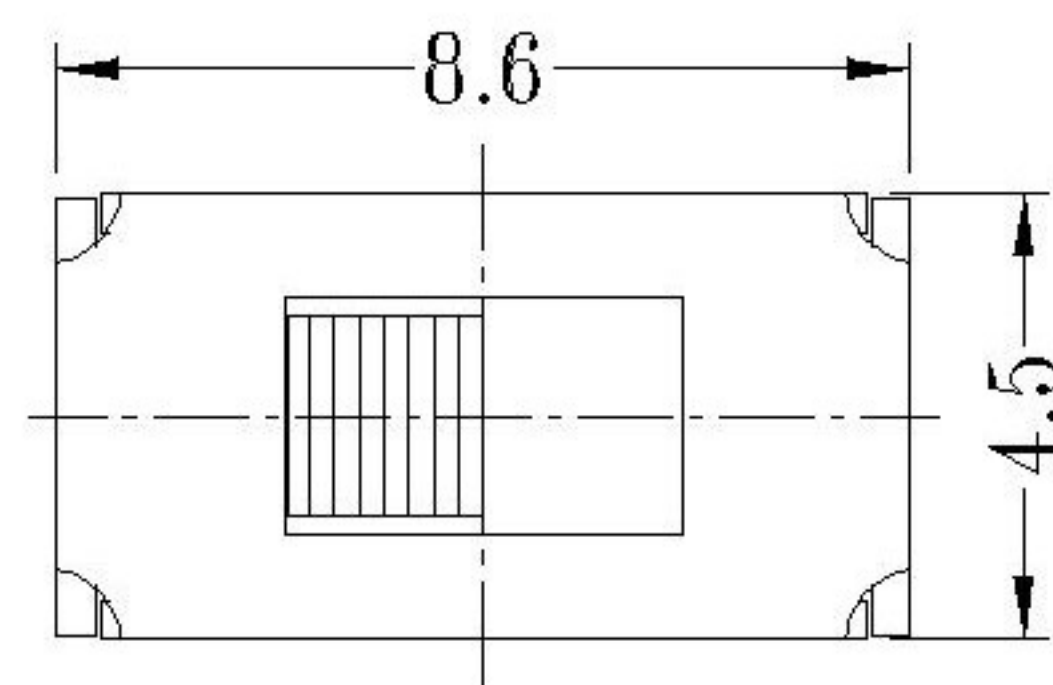


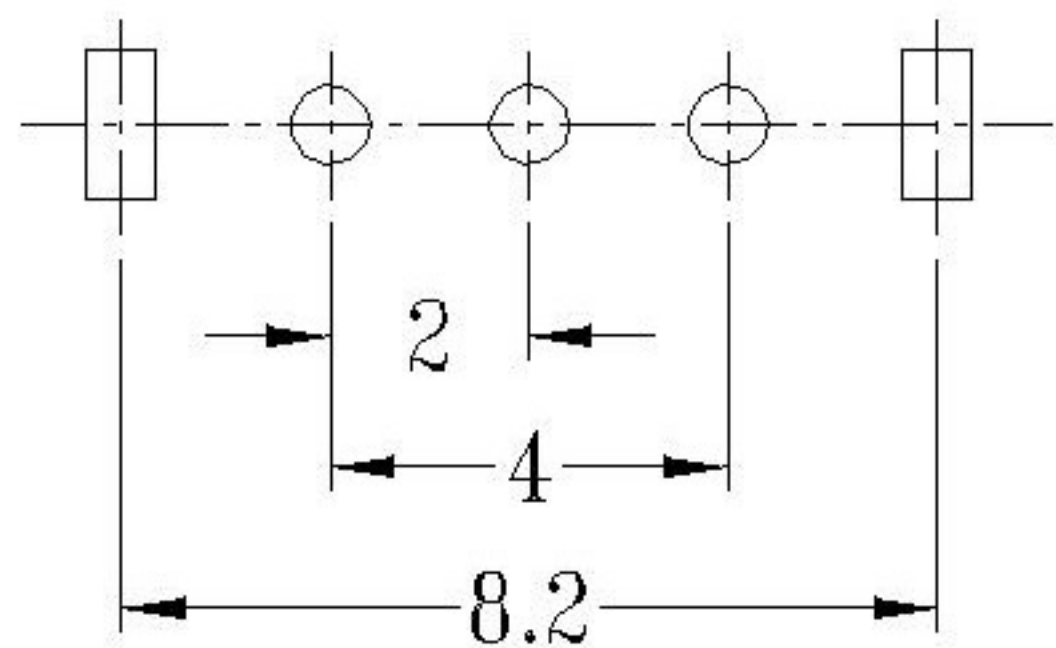

SCHEMATIC (NON-SHORTING)

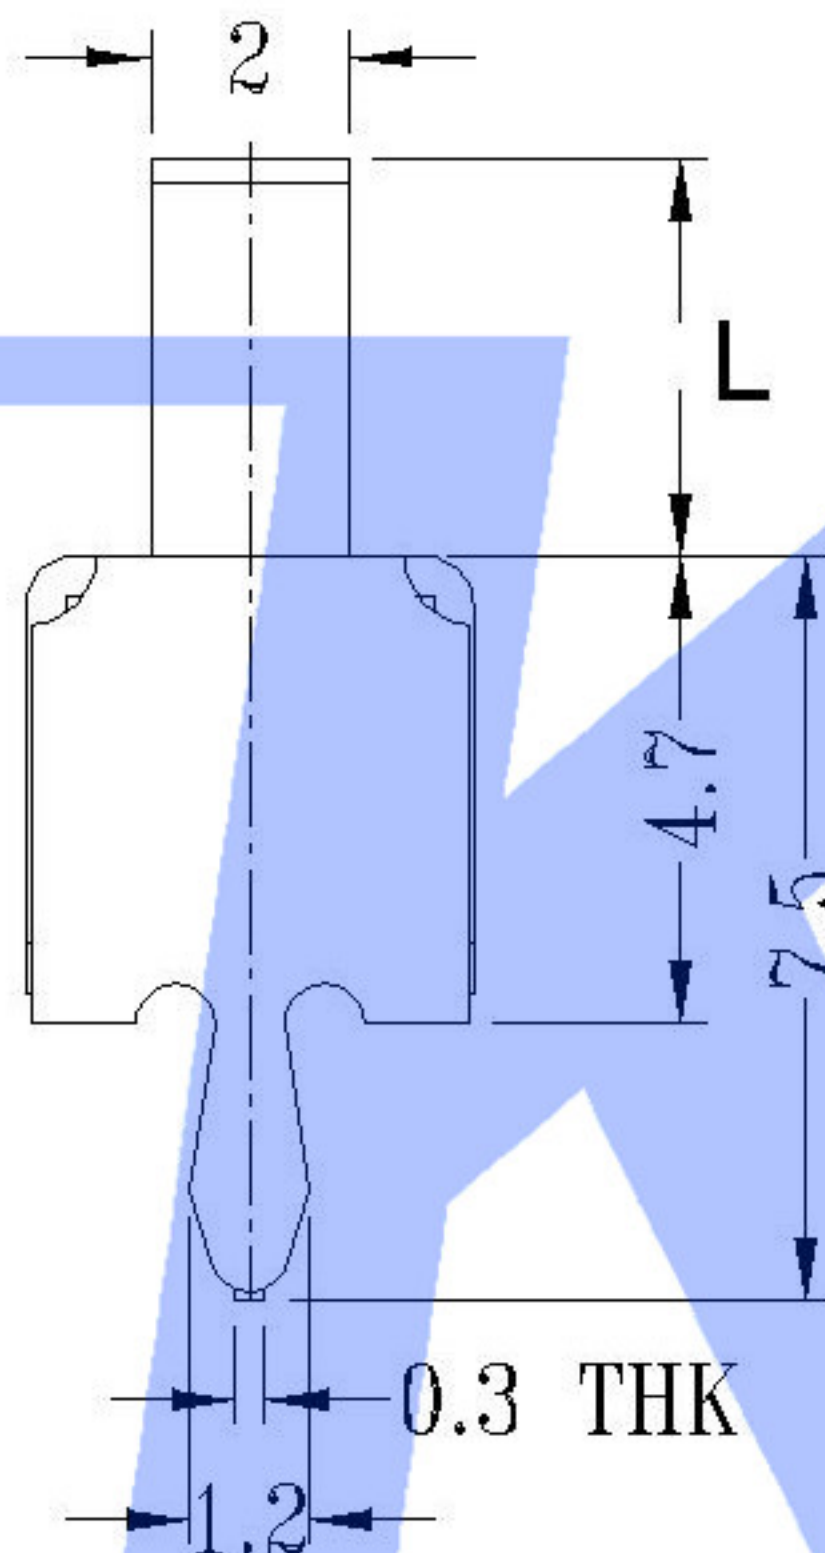

P.C.B. LAYOUT
BOTTOM VIEW

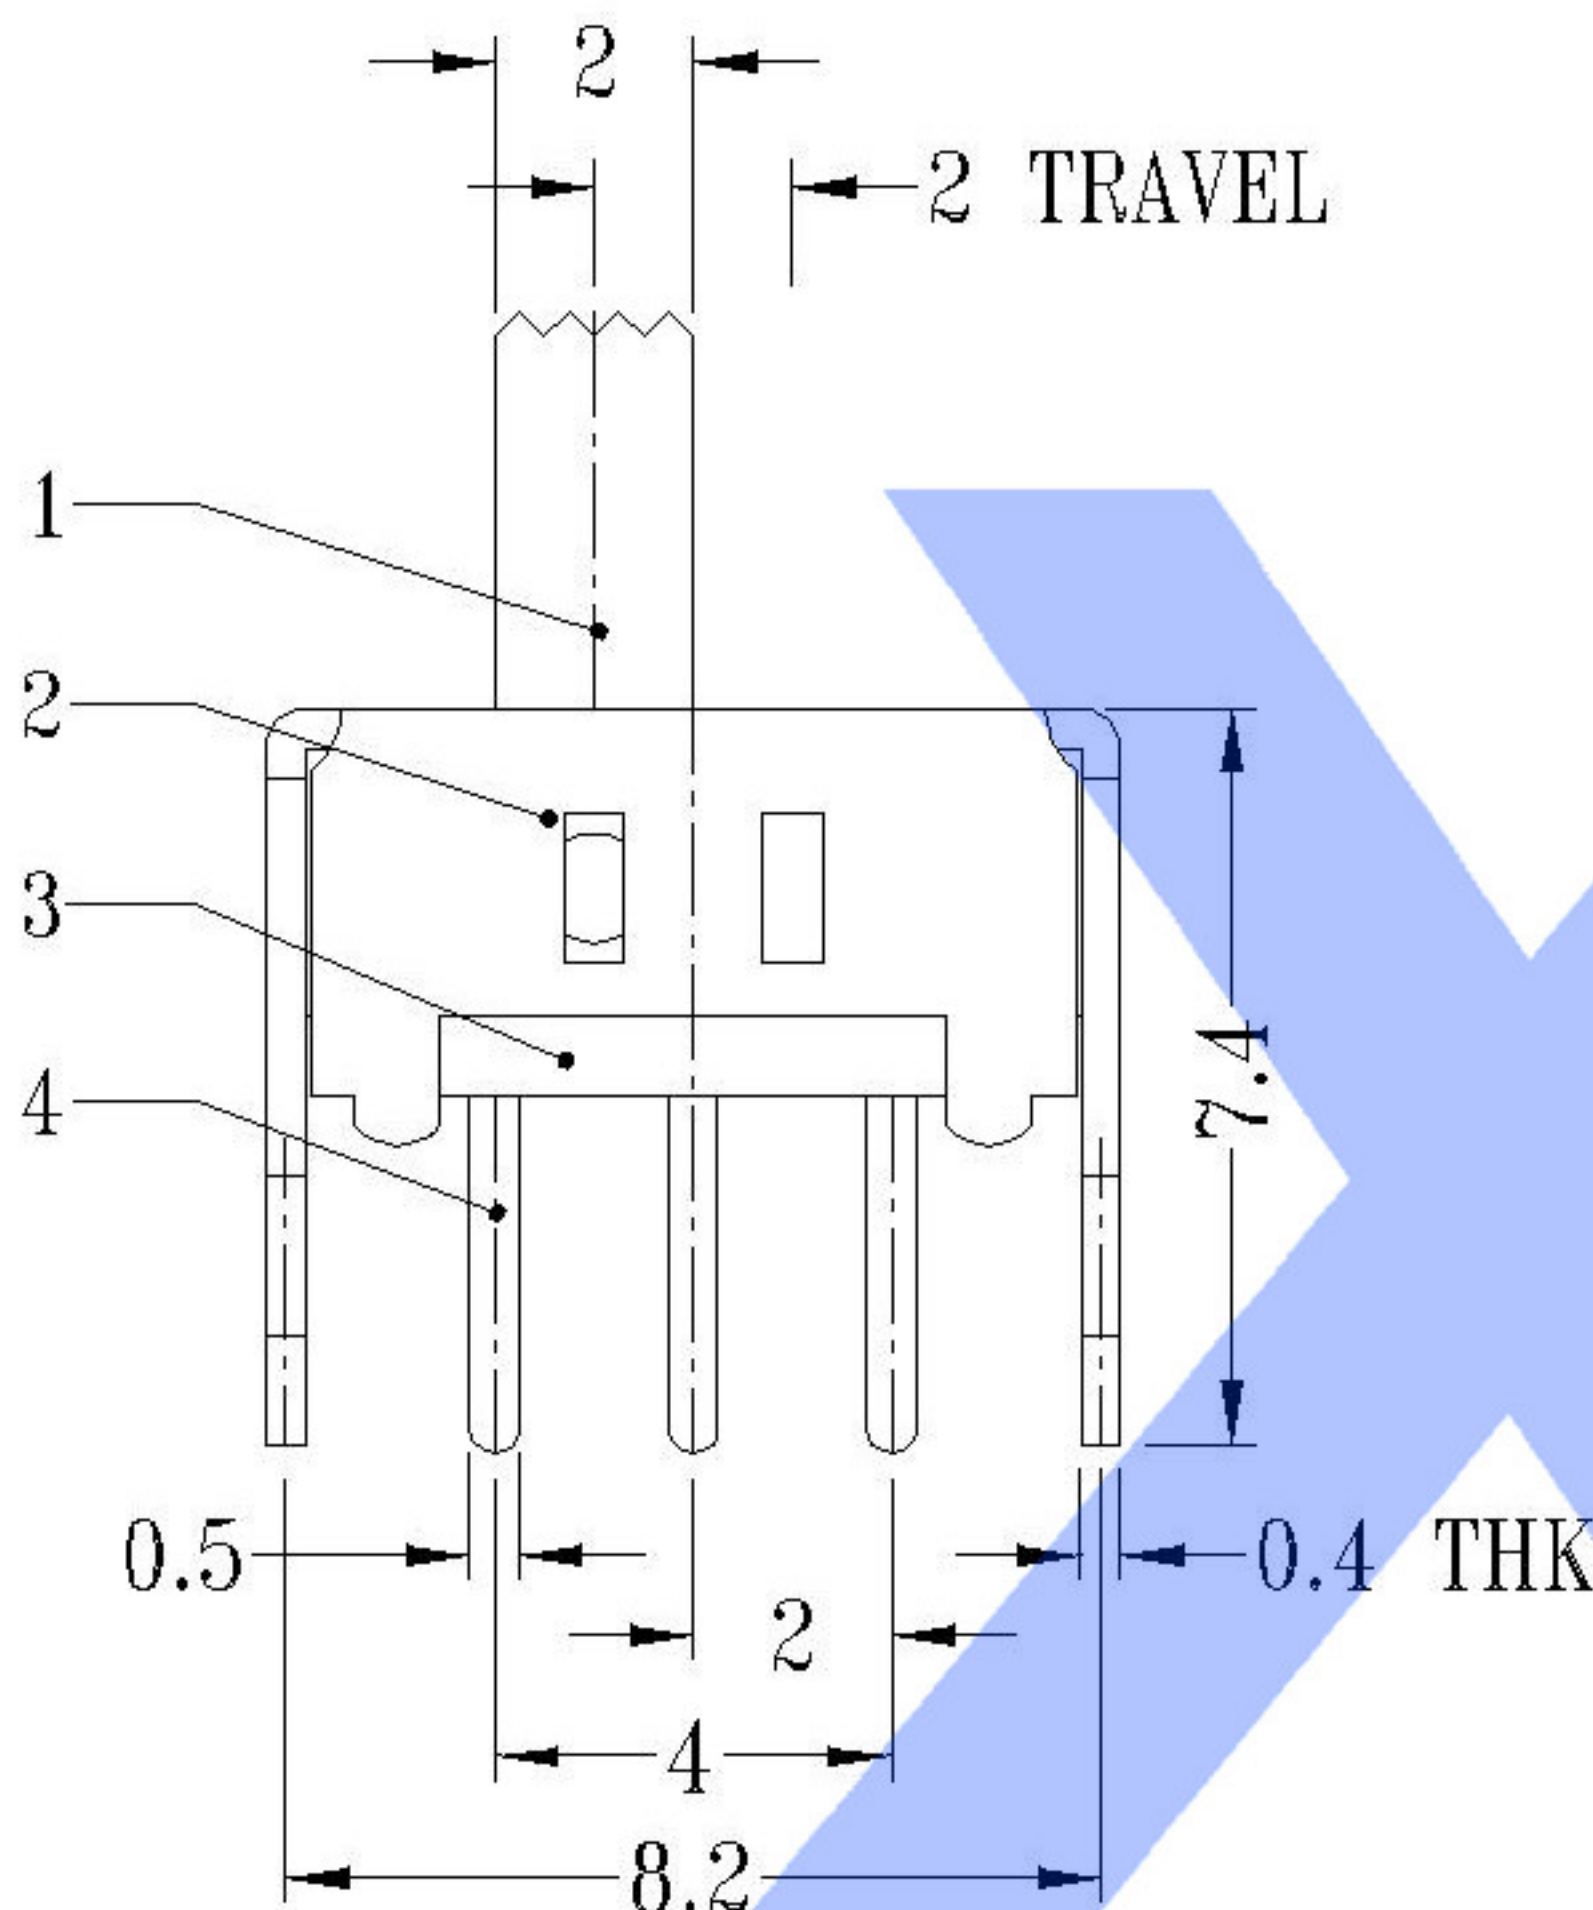

SS-12D07

X X

L (mm)
2 ~ 12

Colour
B:Black
R:Red

SWITCH CONNECTOR

④	Terminal	—	3	Brass (0.30t)	ag Plated	—
③	Base	—	1	Phenolic Resin		—
②	Cover	—	1	Sus	Natural	—
①	Keystake	—	1	Pa66	Black	—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100m MAX.
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

						ANGLAR	±5°
△X						L≤4	±0.2
△X						4<L≤16	±0.3
△X						16<L≤63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED		L>63	±0.5
REVISIONS							UNSPECIFIED TOLERANCES
www.xk-dg.cn www.1k0k.com www.1k0k.cn							

DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		DATE		VIEW:	PART NO.: SS-12D07
CHKD		DATE		UNIT: mm	DWG NO.: SS-12D07-X-X
APPD		DATE		SIZE: A4	WEIGHT 1.0g
XKB INDUSTRIAL PRECISION CO.,LIMITED					SHEET 1/1
					REVISION A0