


1200V/200A 2 in one-package


Features:

- 1200V200A, $V_{CE(sat)(typ)} = 2.30V$
- SPT (Soft Punch Through) technology
- Lower losses
- Higher system efficiency
- Excellent short-circuit capability
- Square RBSOA

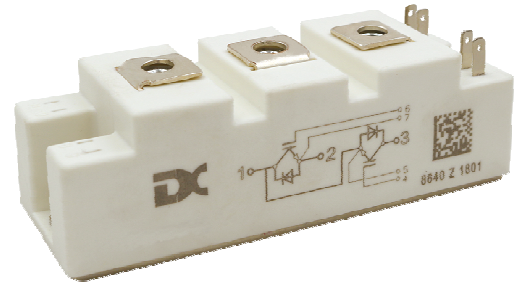

General Applications:

Daxin's IGBTs offer ultrafast switching speed for application such as welding, inductive heating, UPS and other high frequency applications

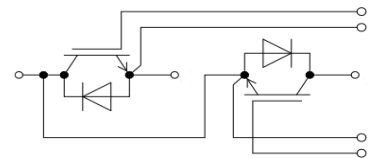

Equivalent Circuit Schematic

Absolute Maximum Ratings of IGBT

V_{CES}	Collector to Emitter Voltage		1200	V
V_{GES}	Continuous Gate to Emitter Voltage		± 30	V
I_C	Continuous Collector Current	$T_C = 25^\circ C$	400	A
		$T_C = 100^\circ C$	200	
I_{CM}	Pulse Collector Current	$T_J = 150^\circ C$	400	A
P_D	Maximum Power Dissipation (IGBT)	$T_C = 25^\circ C$, $T_J = 150^\circ C$	660	W
t_{sc}	Short Circuit Withstand Time		> 10	μs
T_J	Maximum IGBT Junction Temperature		150	$^\circ C$
T_{JOP}	Maximum Operating Junction Temperature Range		-40 to +150	$^\circ C$
T_{stg}	Storage Temperature Range		-40 to +125	$^\circ C$

Absolute Maximum Ratings of Freewheeling Diode

V_{RRM}	Repetitive Peak Reverse Voltage Preliminary Data		1200	V
I_F	Diode Continuous Forward Current	$T_C = 25^\circ C$	400	A
		$T_C = 100^\circ C$	200	
I_{FM}	Diode Maximum Forward Current		400	A

Electrical Characteristics of IGBT at $T_J = 25^\circ\text{C}$ (Unless Otherwise Specified)

Parameter		Test Conditions		Min	Typ	Max	Unit
BV _{CES}	Collector to Emitter Breakdown Voltage	V _{GE} = 0V, I _C = 1mA		1200			V
I _{CES}	Collector to Emitter Leakage Current	V _{GE} = 0V, V _{CE} = V _{CES}				1	mA
I _{GES}	Gate to Emitter Leakage Current	V _{GE} = ±30V, V _{CE} = 0V				200	nA
V _{GE(th)}	Gate Threshold Voltage	I _C = 1mA, V _{CE} = V _{GE}		4.5		5.7	V
V _{CE(sat)}	Collector to Emitter Saturation Voltage (Module Level)	I _C = 200A, V _{GE} = 15V	T _J = 25°C		2.30	2.50	V
			T _J = 125°C		2.70		

Switching Characteristics of IGBT

t _{d(on)}	Turn-on Delay Time	V _{CC} = 600V I _C = 200A R _G = 10Ω V _{GE} = ±15V Inductive Load	T _J = 25°C		165		ns
			T _J = 125°C		175		
t _r	Turn-on Rise Time		T _J = 25°C		145		ns
			T _J = 125°C		150		
t _{d(off)}	Turn-off Delay Time		T _J = 25°C		790		ns
			T _J = 125°C		820		
t _f	Turn-off Fall Time		T _J = 25°C		115		ns
			T _J = 125°C		140		
E _{on}	Turn-on Switching Loss		T _J = 25°C		31.0		mJ
			T _J = 125°C		40.5		
E _{off}	Turn-off Switching Loss		T _J = 25°C		15.0		mJ
			T _J = 125°C		22.5		
Q _g	Total Gate Charge		T _J = 25°C		1290		nC
R _{gint}	Integrated gate resistor	f = 1M; V _{pp} = 1V	T _J = 25°C		2.5		Ω
C _{ies}	Input Capacitance	V _{CE} = 25V V _{GE} = 0V f = 1MHz	T _J = 25°C		12		nF
C _{oes}	Output Capacitance		T _J = 25°C		1.86		
C _{res}	Reverse Transfer Capacitance		T _J = 25°C		1.05		
R _{θJC}	Thermal Resistance, Junction-to-Case (IGBT)					0.17	°C/W


Electrical and Switching Characteristics of Freewheeling Diode

V _F	Diode Forward Voltage	I _F = 200A , V _{GE} = 0V	T _J = 25°C		1.90	2.20	V
			T _J = 125°C		1.90		
t _{rr}	Diode Reverse Recovery Time	I _F = 200A, di/dt=22000A/μs, V _{rr} = 600V,	T _J = 25°C		150		ns
			T _J = 125°C		280		
I _{rr}	Diode Peak Reverse Recovery Current		T _J = 25°C		160		A
			T _J = 125°C		190		
Q _{rr}	Diode Reverse Recovery Charge		T _J = 25°C		13.5		uC
			T _J = 125°C		23.5		
E _{rr}	Diode Reverse Recovery Energy		T _J = 25°C		4.50		mJ
			T _J = 125°C		9.00		
R _{θJC}	Thermal Resistance, Junction-to-Case (Diode)					0.30	°C/W

Module Characteristics

Parameter		Min.	Typ.	Max.	Unit
V_{iso}	Isolation Voltage (All Terminals Shorted), $f = 50Hz$, 1minute	2500			V
$R_{\theta CS}$	Case-To-Sink(Conductive Grease Applied)		0.1		$^\circ C/W$
M	Power Terminals Screw: M5	3.0		5.0	N·m
M	Mounting Screw: M6	4.0		6.0	N·m
G	Weight		160		g

Internal Circuit:

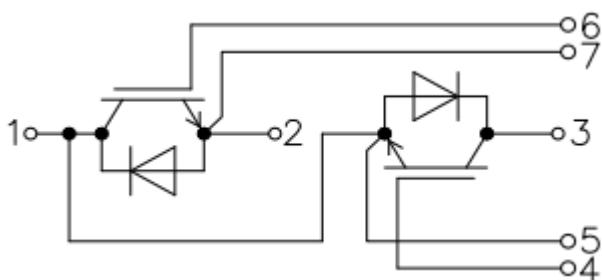

Package Dimension
Dimensions in Millimeters

