

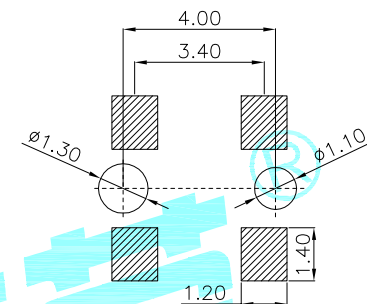
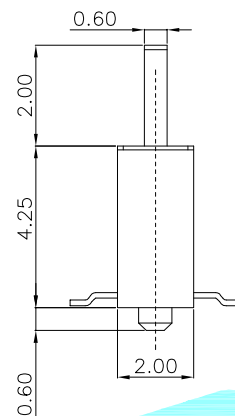
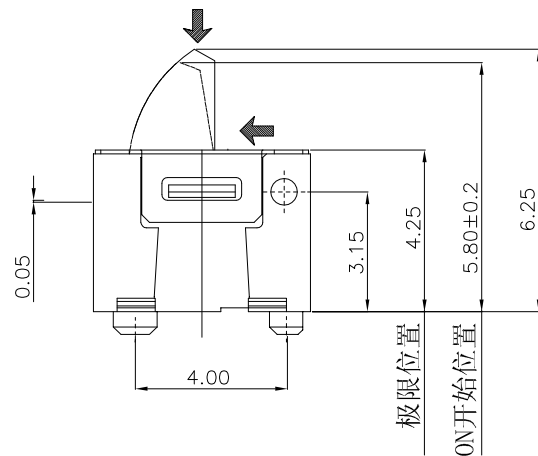


动作方向




PCB LAND DIMENSION



技术要求:

1. 额定负荷: DC 12V 50mA
2. 绝缘电阻: $\geq 100M\Omega$
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 50000次
5. 环境温度: $-10^{\circ} \sim +60^{\circ}$
6. 相对湿度: $40^{\circ}C \leq 95\%$
7. 接触电阻: $\leq 100M\Omega$
8. 接触行程: 0.5 ± 0.2
9. 动作力: 30gf



CIRCUIT DIAGRAM

⑤	Contact Spring	—	1	SUS	Natural	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA66	Black	—
②	Cover	—	1	SUS	Black	—
①	Knob	—	1	POM	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		HRO韩荣® ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang		2018/8/1				
CHECKED					TITLE:	DETECTOR SWITCHS	
APPROVALS					PART NO.	K5-1673SA-01	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
			±2'	DRAWING NO.	_____	SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			