

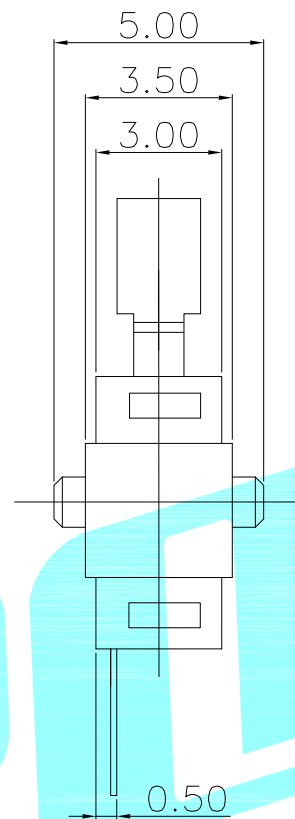


ROHS

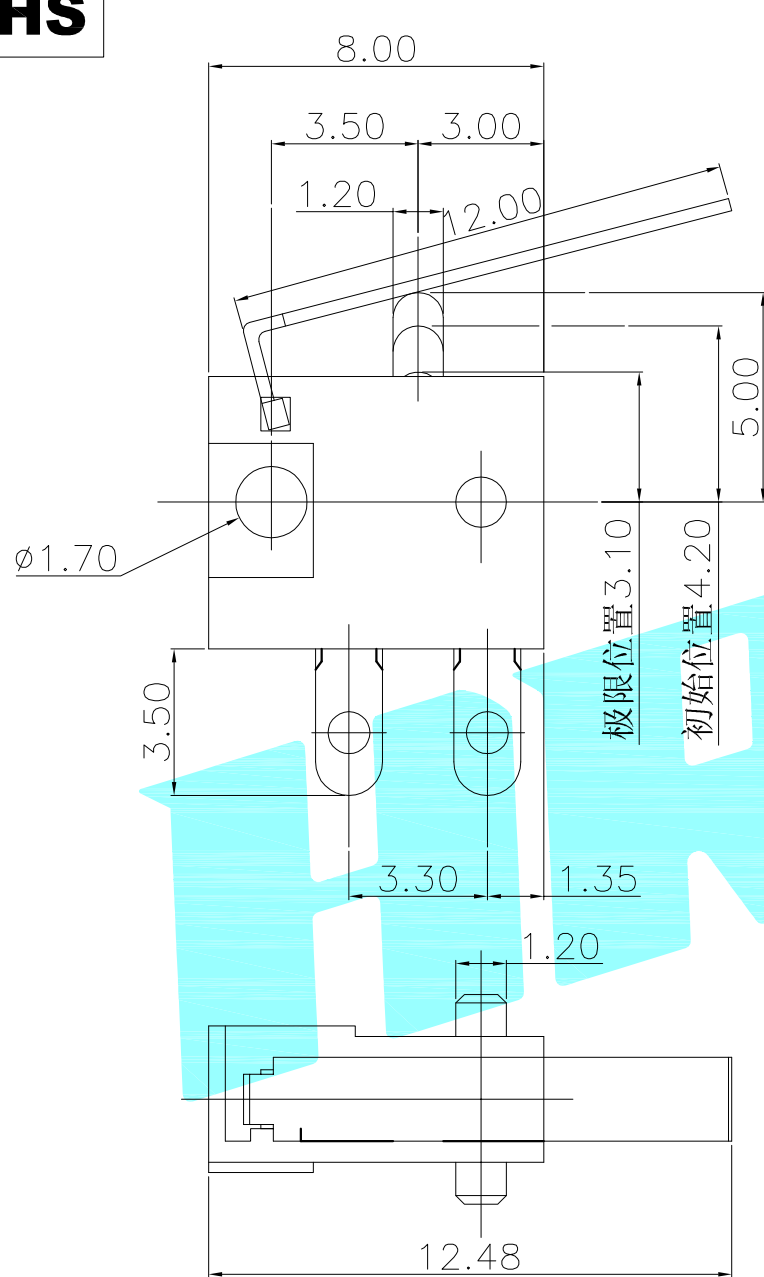

电气图



CIRCUIT DIAGRAM

技术要求



- 1.零件表面应光洁、无明显飞边,插脚无变形现象;
- 2.开关工作应顺畅,无卡滞现象;
- 3.未注尺寸公差均按GB1804-f级。

⑤	Lever	—	1	brass	—	—
⑤	Contact Spring	—	1	Phosphor Bronze	—	—
④	Terminal	—	2	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA66	Black	—
②	Cover	—	1	PA66	Black	—
①	Knob	—	1	POM	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		HRO® ELECTRONICS CO.,LTD		
DRAWN		J.X.Zhang	2018/8/1				
CHECKED				TITLE:		DETECTOR SWITCHS	
APPROVALS				PART NO.		K5-1670DA-02	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
			±2'	DRAWING NO.	_____	SHEET 1 OF	

_____	A	_____	NEW	_____	_____	_____
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

ROHS

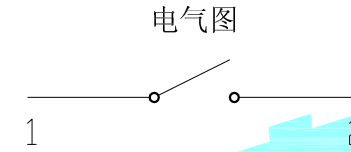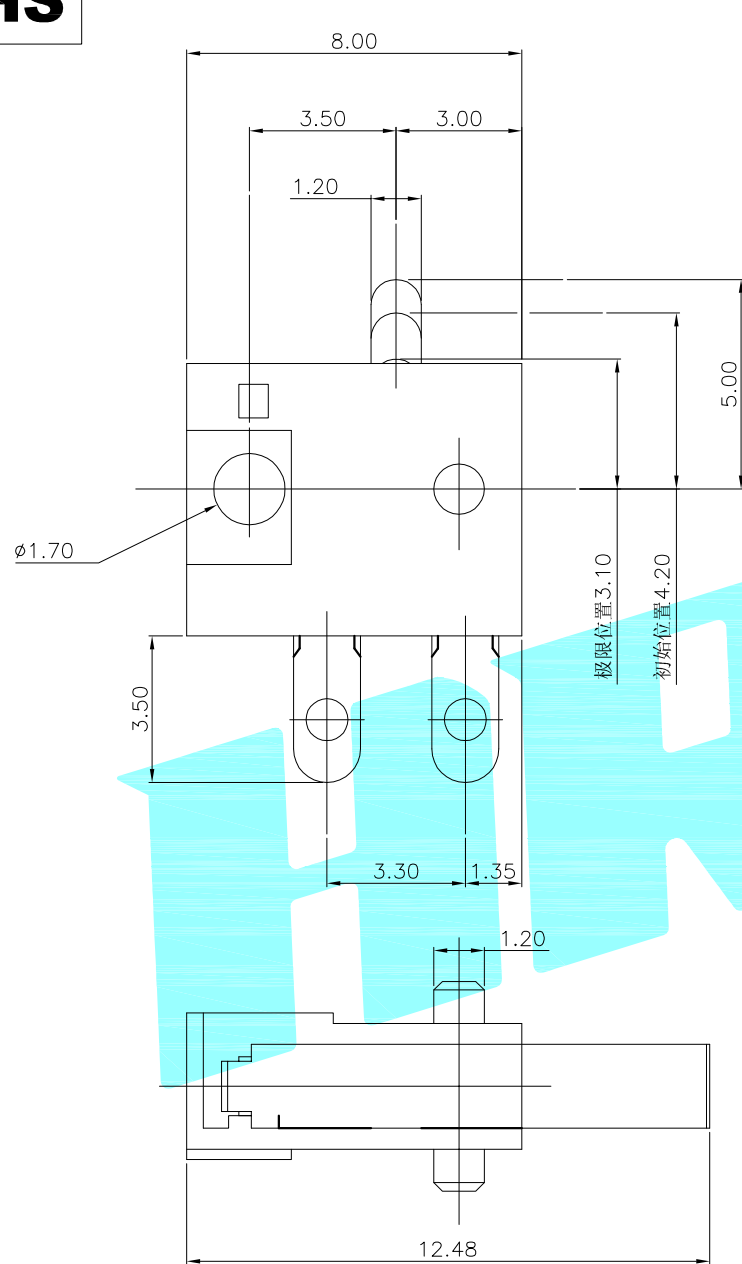

CIRCUIT DIAGRAM

技术要求

1. 零件表面应光洁、无明显飞边,插脚无变形现象;
2. 开关工作应顺畅,无卡滞现象;
3. 未注尺寸公差均按GB1804-f 级。

⑤	Contact Spring	—	1	Phosphor Bronze	—	—
④	Terminal	—	2	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA66	Black	—
②	Cover	—	1	PA66	Black	—
①	Knob	—	1	POM	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		HRO韓榮® ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang	2018/8/1					
CHECKED					TITLE:	DETECTOR SWITCHS	
APPROVALS					PART NO.	K5-1670DA-01	
D. TOLERANCES ARE	30~以上	±0.30	ANGLE ±2°	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20		DRAWING NO.	_____	SHEET 1 OF 1	
	5~10	±0.15					
	~ 5	±0.10					

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.