
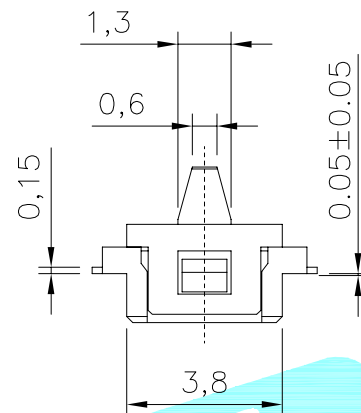
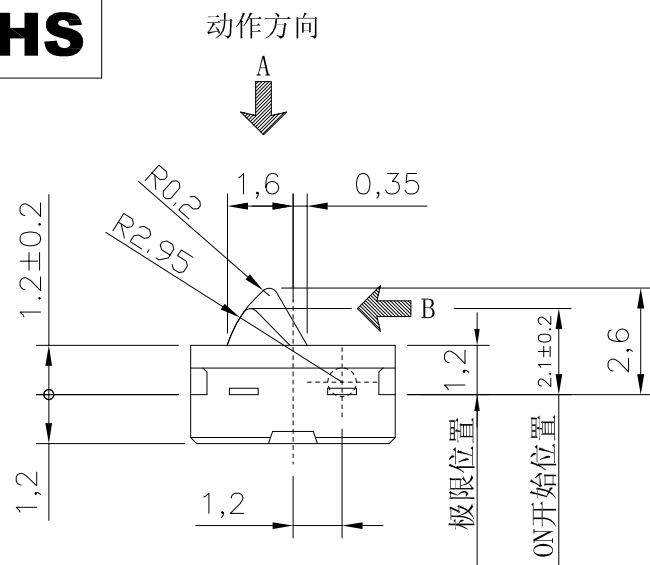
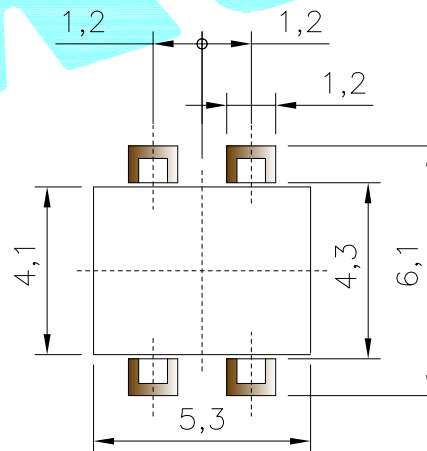


CIRCUIT DIAGRAM

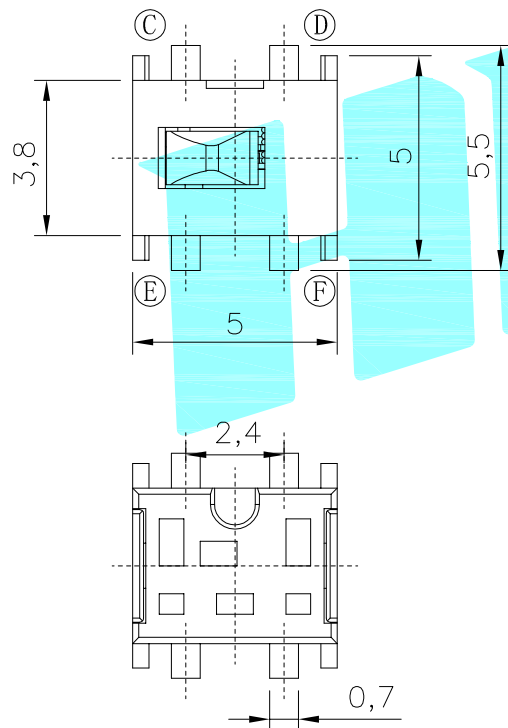

PCB LAND DIMENSION

技术要求:

1. 额定负荷: DC 5V 0.1~5mA
2. 绝缘电阻: $\geq 100M\Omega$
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 100000次
5. 环境温度: $-10^{\circ} \sim +60^{\circ}$
6. 相对湿度: $40^{\circ}C \leq 95\%$
7. 接触电阻: $\leq 1\Omega$
8. 接触行程: 0.5 ± 0.2
9. 动作力: $\leq 0.3N(31gf)$
10. 各零件无明显飞边, 配合要紧密, 不得有明显松动。

⑤	Center Spring	—	1	Phosphor Bronze	Au Plated	—
④	Base	—	1	PA	Black	—
③	Terminal	—	4	Phosphor Bronze	Au Plated	—
②	Keystore	—	1	PA	Natural	—
①	Cover	—	1	PA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		HRO韓榮® ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang	2018/8/1					
CHECKED			TITLE:		DETECTOR SWITCHS		
APPROVALS			PART NO.		K5-1632FN-01		
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20		DRAWING NO.		SHEET 1 OF 1	
	5~10	±0.15					
	~ 5	±0.10					
			±2°				

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.