

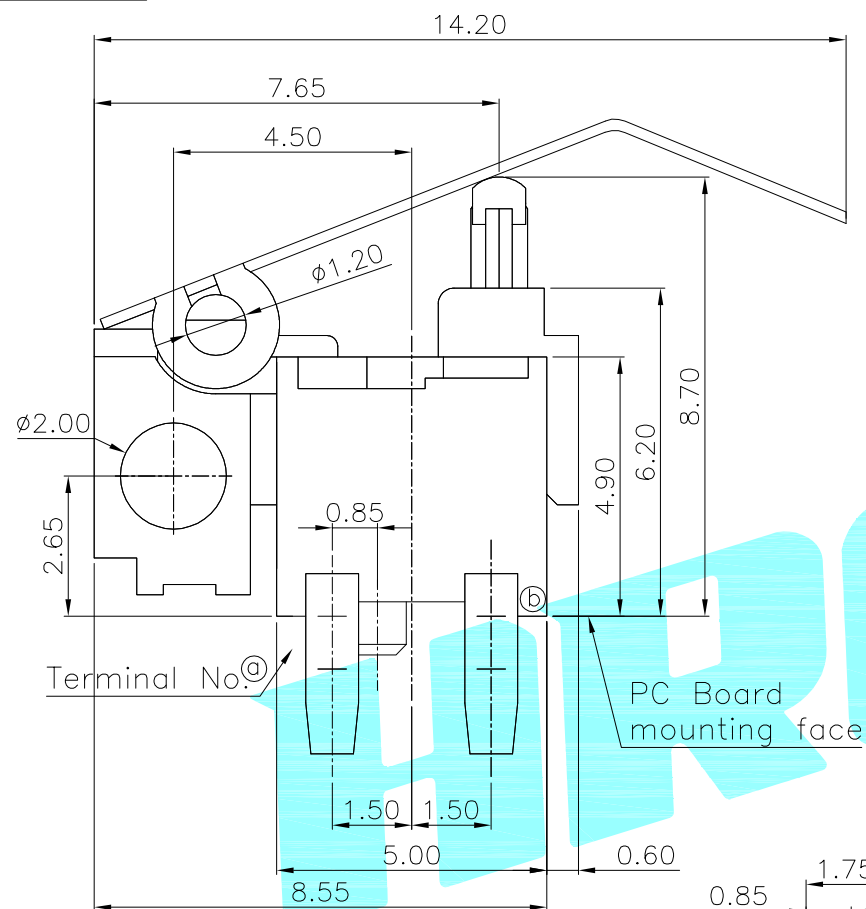


Circuit Diagram

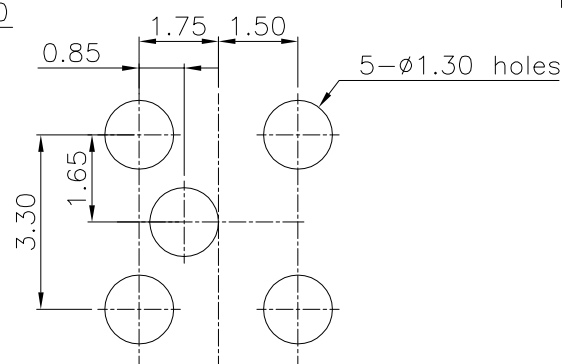

PCB Layout(Pattern side)

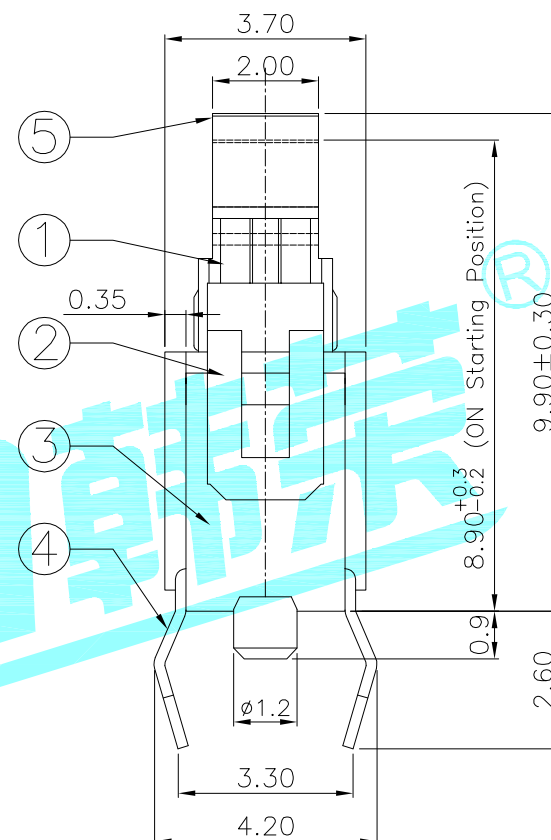

NOTE:
Rating: DC 30V 0.1A
Operating Force: 30 ± 10 gf
Lifetime: 50,000 Cycles

⑥	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
⑤	Lever	—	1	SUS	Natural	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA46	Black	—
②	Cover	—	1	PA46	Black	—
①	Knob	—	1	PA46	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS

DATE

DRAWN

J.X.Zhang

2013/9/11

CHECKED

APPROVALS

TITLE:

DETECTOR SWITCHS

PART NO.

K5-1626DA-02

TOLERANCES ARE

30~以上	± 0.30
10~30	± 0.20
5~10	± 0.15
~ 5	± 0.10

ANGLE

UNIT: mm

SCALE: 1:1

PROJ:

DRAWING NO.

SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.