

SLMESD5V0D9 TVS Protection Diodes

SOLA ESD Protection Diodes

General description

The SLMESD5V0D9 series is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.


Features

- Stand-off Voltage: 5V-7.0V
- Peak power up to 1200 Watts@8x20us Pulse
- Low leakage
- Response time is typically<1ns
- ESD rating of Class 3(>16KV)per Human Body Model
- IEC61000-4-2 Level 4 ESD Protection
- IEC61000-4-4 Level 4 EFT Protection

Applications

- Cellular phones
- Portable devices
- Digital cameras
- Power supplies

Package Information

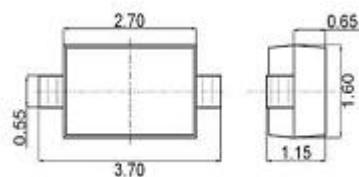

Marking





SLMESD5V0D9

TVS Diodes for ESD Protection

Absolute Ratings(Tamb=25°C)

Symbol	Parameter	Value	Units
P _{PP}	Peak pulse power(TP=8/20us)	1200	W
T _L	Maximum lead temperature for soldering during 10S	260	°C
T _{stg}	Storage temperature range	-55 to +155	°C
T _{OP}	Operating temperature range	-40 to +125	°C
T _j	Maximum junction temperature	150	°C
	IEC61000-4-2(ESD)	air discharge Contact discharge	±30 ±30
	IEC61000-4-4(EFT)	65	A
	ESD voltage	Per Human Body Model Per Machine Model	16 400
		KV	V


ELECTRICAL CHARACTERISTICS (T_A=25°C unless noted, V_F=0.9V Max @I_F=10mA for all types)

	V _{RWM} (V)	I _R (uA) @V _{RWM}	V _{BR} (V) @ I _T	I _T	V _C (V)@ I _{PP} =5A	V _C (V)@ Max I _{PP}	I _{PP} (A)	P _{PK} (W)	C (pF)
	Max	Max	Min	mA	Typ	Max	Max	Max	Typ
SLMESD5V0D9	5.0	2	6.2	1.0	9.0	23	70	1200	700

ELECTRICAL CHARACTERISTICS

(T_A=25°C unless otherwise noted)

Symbol	Parameter
I _{PP}	Maximum Reverse Peak Pulse Current
V _C	Clamping Voltage @ I _{PP}
V _{RWM}	Working Peak Reverse Voltage
I _R	Maximum Reverse Leakage Current @ V _{RWM}
V _{BR}	Breakdown Voltage @ I _T
I _T	Test Current
I _F	Forward Current
V _F	Forward Voltage @ I _F
P _{PK}	Peak Power Dissipation
C	Max Capacitance @V _R =0 and f=1MHZ

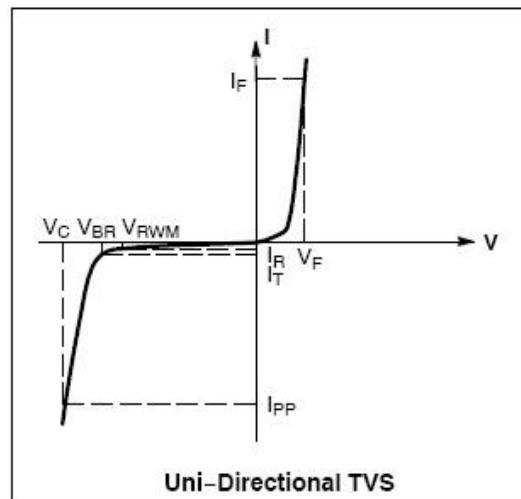

*The “G” suffix indicates Pb-Free package available.

**Other voltages available upon request

1. Surge current waveform per Figure 1.
2. V_{BR} is measured with a pulse test current I_T at an ambient temperature of 25°C

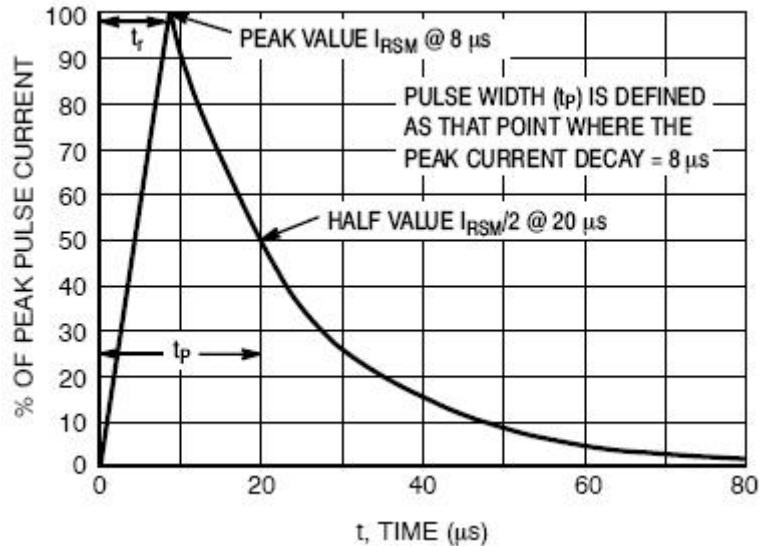


Figure 1 8x20us Pulse Waveform

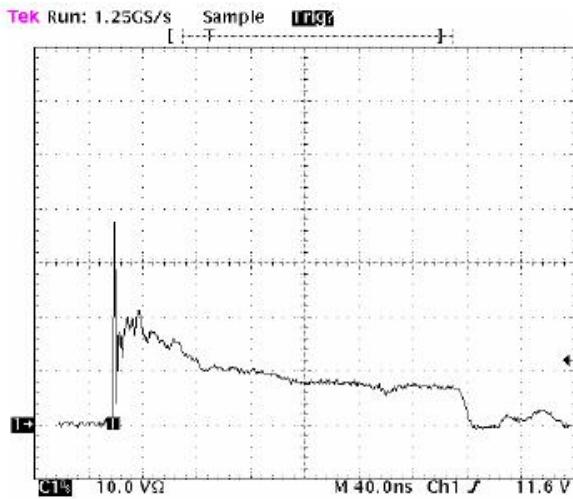


Figure 2 Positive 8KVcontact per

IEC 61000-4-2-ESD

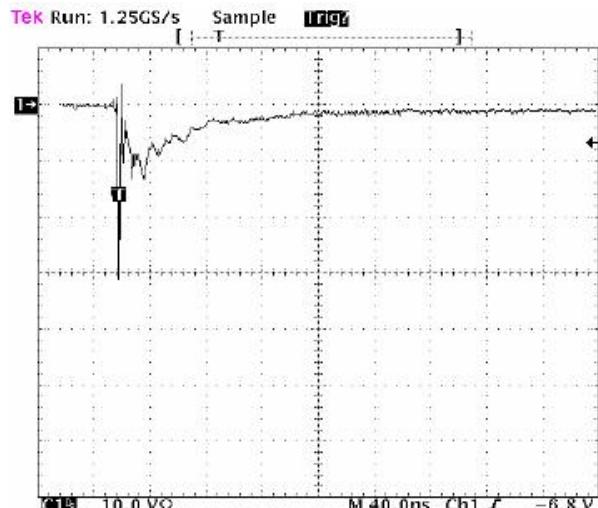


Figure 3 Negative 8KVcontact per

IEC 61000-4-2-ESD