



深圳市业展电子有限公司

# 承 认 书

## SPECIFICATION FOR APPROVAL

客户名称

Customer Name

客户料号

Customer P/N

产品名称

Product Name

产品规格

Product Type

申请承认日期

Apply Date

版本

REV.

供货商属性 ☐ 代理商

Vendor Type Agency

Co., Ltd

☒ 制造商 深圳市业展电子有限公司

Manufacturer: Shenzhen Yezhan Electronics

Note: 禁止使用 1 级环境管理物质.遵守 ACBEL"环境管理物质规范"中所要求之含量标准.

Banned use of hazardous substances of level 1; Comply with "Specification for Hazardous Substances and Materials Management" of ACBEL

| 供货商印鉴<br>Vendor Stamp | APPROVED | CHECKED | PREPARED | 承认印鉴<br>Stamp |
|-----------------------|----------|---------|----------|---------------|
|                       |          |         | 邓小辉      |               |

Mainland China: 深圳市业展电子有限公司

Shenzhen Yezhan Electronics Co., Ltd.

Add: 深圳市龙华新区观澜街道办横坑河东村 440 号 6-7 栋

Building 6<sup>th</sup>-7<sup>th</sup> ,Rongchang Industry Zone, Longhua

New District, Shenzhen City, P.R.China

Tel: 0086-755-26517682 ext:8036 Fax: 0086-755-83918284

Mobile:0086-8926048206

E-mail: [caixiaojuan@yezhan.com.cn](mailto:caixiaojuan@yezhan.com.cn)

|                                                                            |          |              |
|----------------------------------------------------------------------------|----------|--------------|
| 标准书名 Classification 承认书 Specification                                      | Spec No. | YZ-QR-EN-007 |
| 品 名 : 合金贴片电阻器 ASH Series<br>Product Name: Alloy high-power shunt Resistors | Version  | 1.0          |
|                                                                            | Page     | 4-1          |

1. 一般事项 General

1.1 适用范围 Scope

本承认书适用于深圳市业展电子有限公司 制造之[ 合金贴片电阻器]。

This specification is available for Alloy Shunt Resistors  
manufactured by

Shenzhen Yezhan Electronics Co., Ltd.

1.2 品质 Quality

本电阻器的制造系经高质量管理程序，并具有高信赖性的质量保证，且符合 RoHS 和  
无卤要求。

The resistor is manufactured by highly quality-controlled process and  
guaranteed high reliability,  
it meets RoHS & Halogen-Free requirement.

1.3 标准试验状态 Standard measuring conditions

温度  $20\pm2^{\circ}\text{C}$ 、湿度  $65\pm5\%$ 。

但在温度  $5\sim35^{\circ}\text{C}$ 、湿度  $45\sim85\%$ 之情况下，仍可给予判定。

Temperature  $20\pm2^{\circ}\text{C}$ , Humidity  $65\pm5\%$ .


Being no doubt about the judgment, measurements can be made within the following  
Temperature

$5\sim35^{\circ}\text{C}$ , Humidity  $45\sim85\%$ .

1.4 形名 (例) Type designation (example)


依使用种类、材料、规格、形状、公称电阻值、电阻值容许差而区别，其构造如下：

The type designation shall be in the following form and as specified.

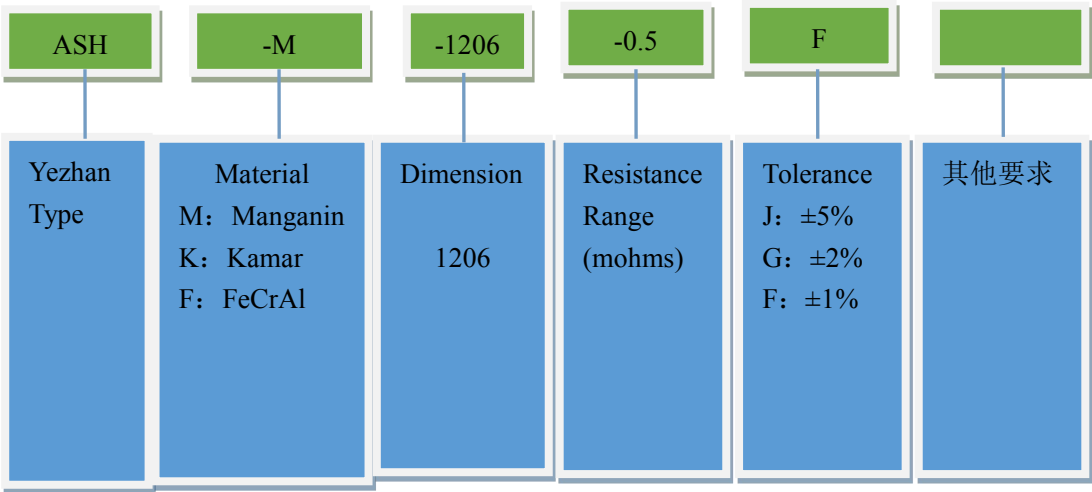


|                                                                            |          |              |
|----------------------------------------------------------------------------|----------|--------------|
| 标准书名 Classification 承认书 Specification                                      | Spec No. | YZ-QR-EN-007 |
| 品 名 : 合金贴片电阻器 ASH Series<br>Product Name: Alloy high-power shunt Resistors | Version  | 1.0          |
|                                                                            | Page     | 4-2          |

1.5 功率曲线 Power Derating

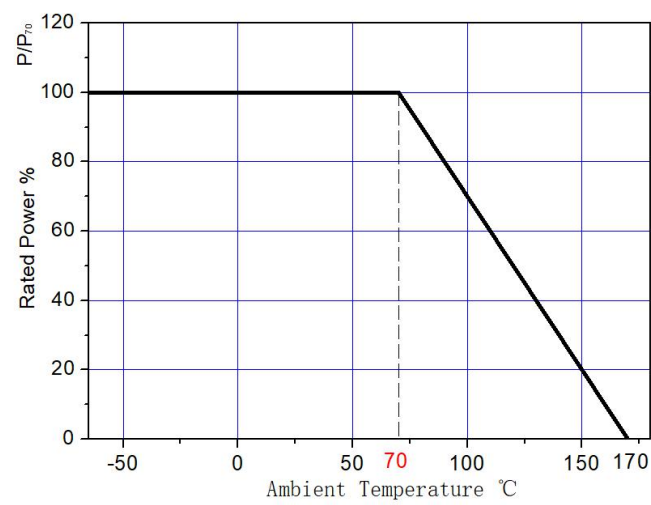


1.6 温度系数曲线 TCR Derating

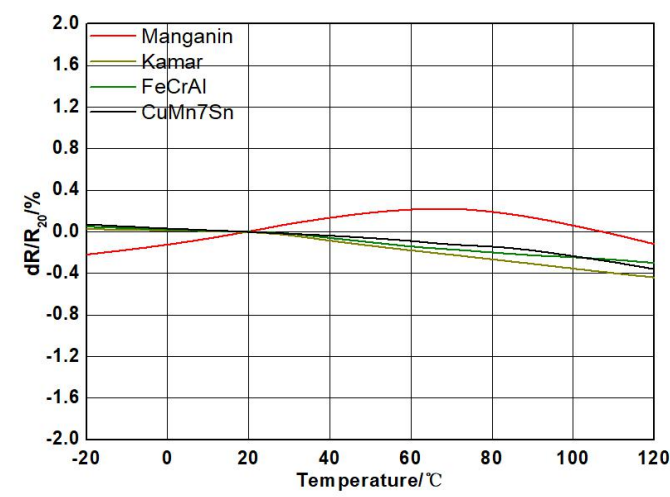

|                                                                            |          |              |
|----------------------------------------------------------------------------|----------|--------------|
| 标准书名 Classification 承认书 Specification                                      | Spec No. | YZ-QR-EN-007 |
| 品 名 : 合金贴片电阻器 ASH Series<br>Product Name: Alloy high-power shunt Resistors | Version  | 1.0          |
|                                                                            | Page     | 4-3          |

1.7 外形 External
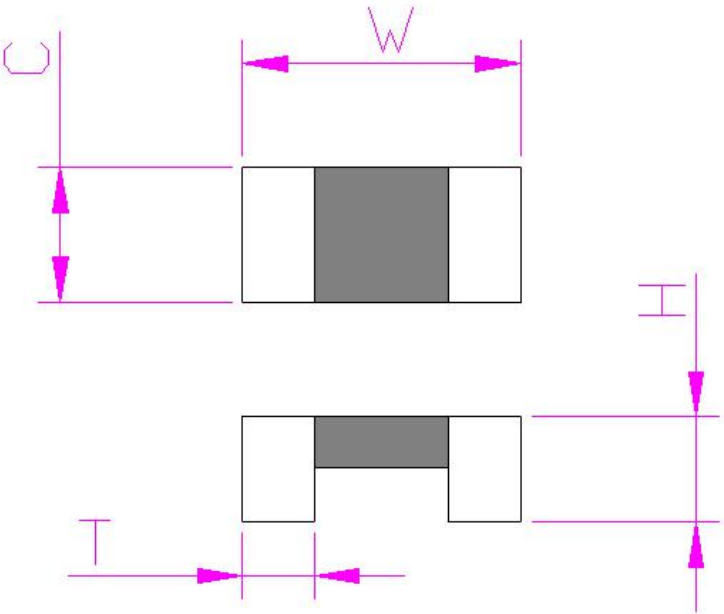
| 项 目<br>Item    | 参 数<br>Parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 图 解<br>Drawing |  <p>The drawing shows two views of the resistor. The top view is a rectangle with a central shaded area. Dimension W indicates the width of the central shaded area. Dimension C indicates the width of the unshaded area on the left. The side view shows the profile of the resistor with a central raised section. Dimension T indicates the thickness of the base, and dimension H indicates the height of the central section.</p> |
| W              | 3.2mm±0.2mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| C              | 1.6mm±0.3mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| T              | 0.7mm±0.2mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| H              | 1.5mm±0.1mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 阻 值            | 0.5mΩ±1%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 额定功率           | 1.5W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 使用温度           | -65℃～170℃                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |


|                                                |          |              |
|------------------------------------------------|----------|--------------|
| 标准书名 Classification 承认书 Specification          | Spec No. | YZ-QR-EN-007 |
| 品 名 : 合金贴片电阻器 ASH Series                       | Version  | 1.0          |
| Product Name: Alloy high-power shunt Resistors | Page     | 5-5          |

2 应用范围 Applications

- 混合应用的电源电流传感器 Current sensor for power hybrid applications
- 变频器 Frequency converters
- 电源模块 Power modules
- 通讯系统 Communication system
- 自动化控制电源 Automatic control power supply
- 汽车市场的高电流应用 High current applications for the automotive market
- 体系认证 IATF16949

3 包装 Packaging

Embossed plastic Tape Specifications

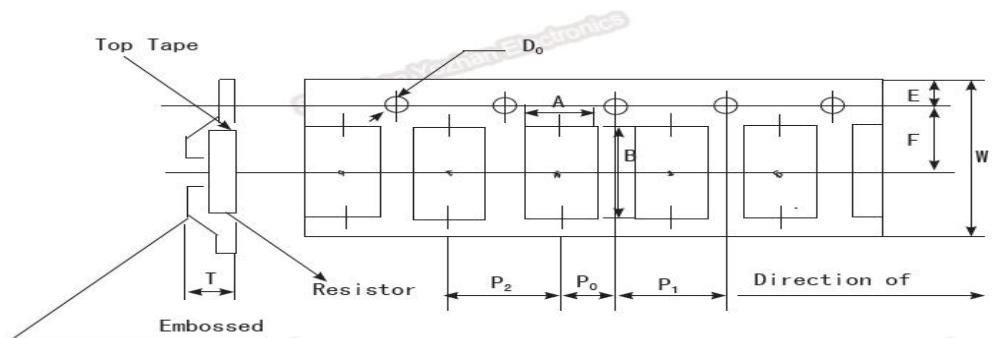

Unit: mm

| Size | A | B | W | E | F | P <sub>0</sub> | P <sub>1</sub> | P <sub>2</sub> | D <sub>0</sub> | T | Quantity |
|------|---|---|---|---|---|----------------|----------------|----------------|----------------|---|----------|
| 1206 |   |   |   |   |   |                |                |                |                |   |          |

4 工作特性 Performance Date

| Items                        | Additional Requirements                                                                                                     | Reference                  | Limits                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------|
| Temperature Cycling          | 1000 Cycles(-55℃ to +125℃)<br>Measurement at 24±2hours after test conclusion                                                | JESD22<br>Method<br>JA-104 | ±0.5%                  |
| High Temperature Exposure    | 1000hrs.@T=125℃.Unpowered.<br>Measurement at 24±2hours after test conclusion                                                | MIL-STD-202<br>Method 108  | ±0.5%                  |
| Biased Humidity              | 1000hrs 85℃/85%RH. Note: Specified conditions:<br>10% of operating power.<br>Measurement at 24±2hours after test conclusion | MIL-STD-202<br>Method 103  | ±0.5%                  |
| Operational Life             | Condition D Steady State TA=125℃ at rated power.<br>Measurement at 24±2hours after test conclusion                          | MIL-STD-202<br>Method 108  | ±1%                    |
| Solderability                | 245℃±5℃,5s+0.5s/-0                                                                                                          | J-STD-002C                 | 95%<br>Coverage<br>Min |
| Resistance to Soldering Heat | 260℃±5℃, 10s±1s<br>Measurement at 24±2hours after test conclusion                                                           | MIL-STD-202<br>Method 210  | ±0.5%                  |
| Short Time Overload          | 5×Rated power for 5 s<br>Measurement at 24±2hours after test conclusion                                                     | MIL-STD-202<br>Method 301  | ±0.5%                  |