
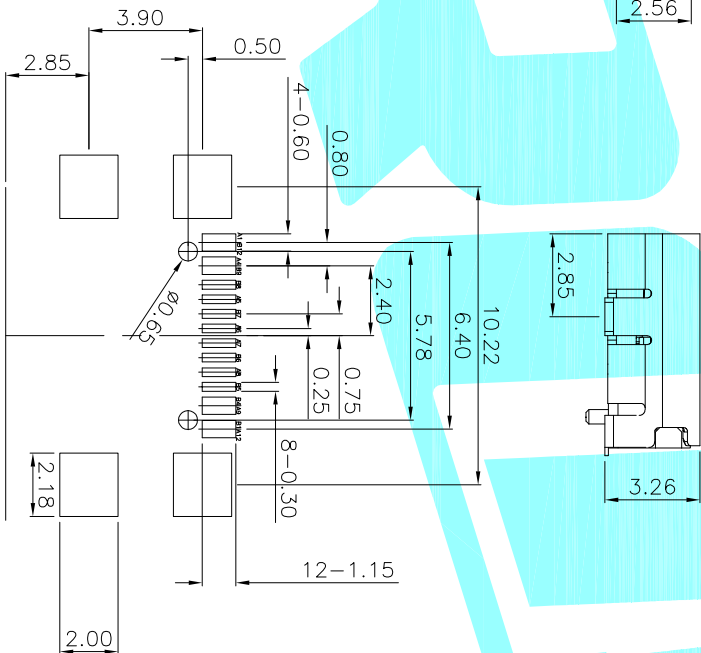
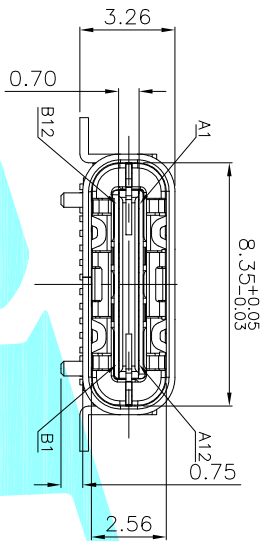


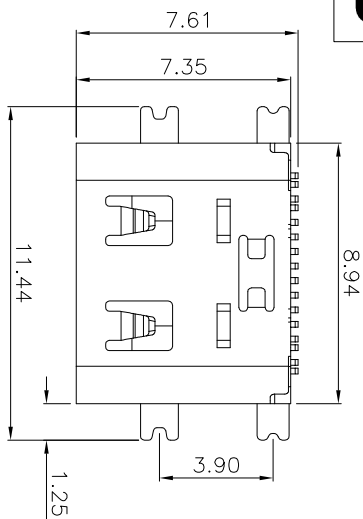

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

备注:
1.材质:
1.1胶芯: LCP+30%G.F UL94V-0
1.2端子: C18140, T=0.12mm; 镍底, 镀金Xμ”
1.3外壳: 不锈钢, T=0.30mm; 表面镀镍100μ”
或亮锡100μ”

- 2.主要特性:
2.1额定电流: 3A
2.2接触阻抗: 40mΩ MAX
2.3绝缘阻抗: 100MΩ MIN 250V DC
2.4耐压测试: 100V AC
2.5沾锡性: 温度250iA5℃, 时间5iA0.5s
2.6整体插入力: 2.0kgf MAX
整体拔出力:0.6kgf MIN
2.7使用寿命: 5000次
2.8工作温度: -30℃~+80℃

③	Shell	—	1	SUS	Ni Plated
②	Contact	—	16	COPPER ALLOY	Au Plated
①	Housing	—	1	LCP	Black
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING

APPROVALS		DATE	ELECTRONICS CO.,LTD		
DRAWN	JIANKUN.LU	2018.08.01			

CHECKED		TITLE:		USB CONNECTOR	
APPROVALS		PART NO.		TYPE-C-31-M-22	
TOLERANCES ARE		30~以上 10~30 5~10 ~5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE UNIT: mm SCALE: 1:1	PROJ: 1 OF 1