

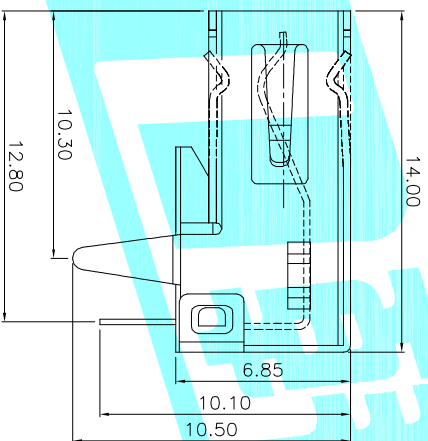
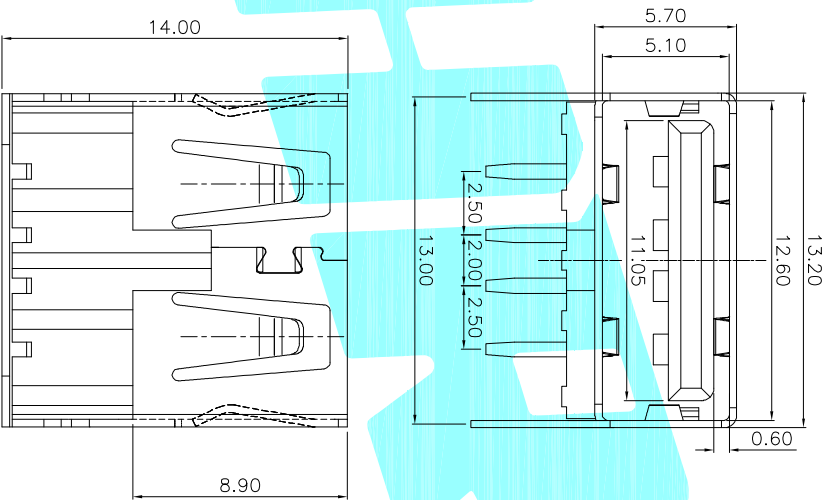








Recommended PCB Layout




SPECIFICATIONS

- 1.RATING: DC30V 1.0A
- 2.MECHANICAL LIFE: 10,000 CYCLES.

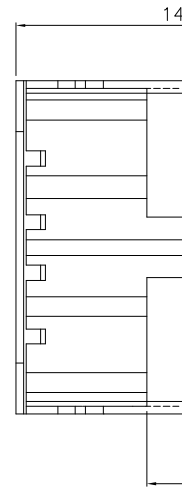

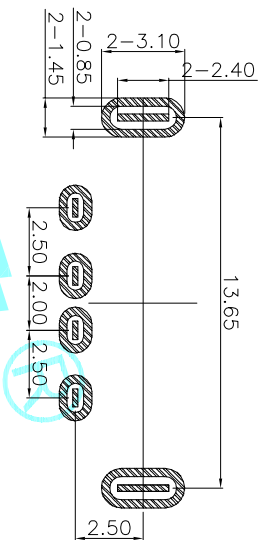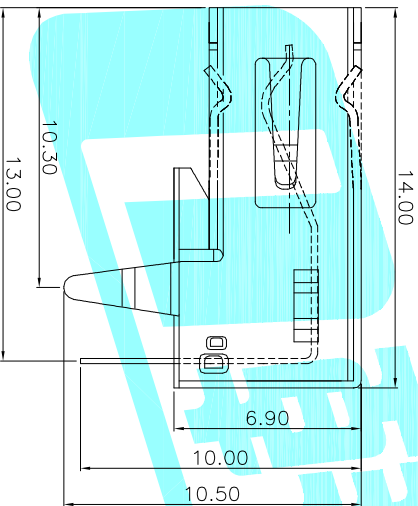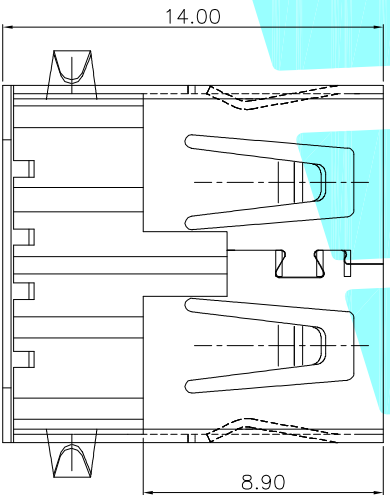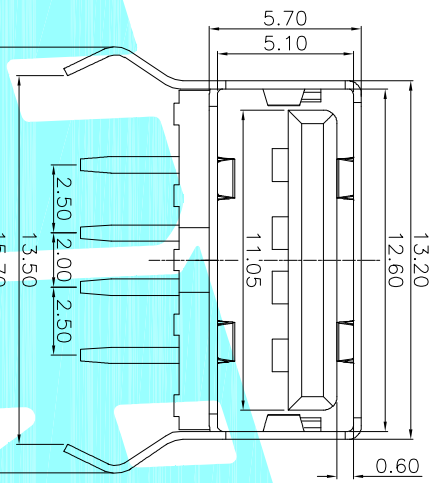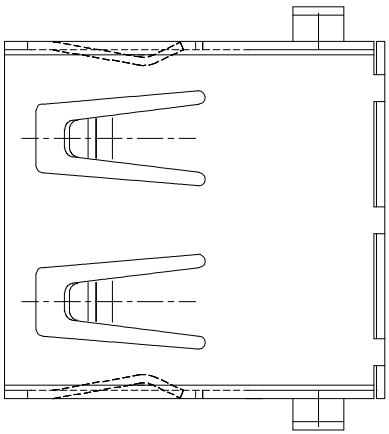Recommended PCB Layout

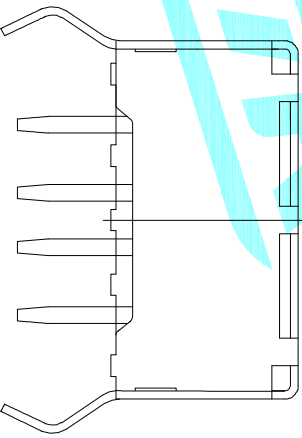

SPECIFICATIONS

1.RATING: DC30V 1.0A
2.MECHANICAL LIFE: 10,000 CYCLES.

③	Base	—	1	NYLON	White
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING

APPROVALS		DATE	H300ELECTRONICS CO.,LTD		
DRAWN	JIANKUN.LIU	2018.08.01	ELECTRONICS CO.,LTD		

CHECKED		TITLE:		USB CONNECTOR	
APPROVALS		PART NO.		U-A-24DD-W-5	
TOLERANCES ARE		30~0.15 10~0.30 5~10 ~5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE	UNIT: mm
ECN NO.		REV.	DATE.	DESCRIPTION.	SCALE: 1:1
A		NEW		CHANGE.	PROJ: 1 OF 1
REV.		DATE.		CHECK.	SHEET
APPRO.		APPRO.		SHEET	