
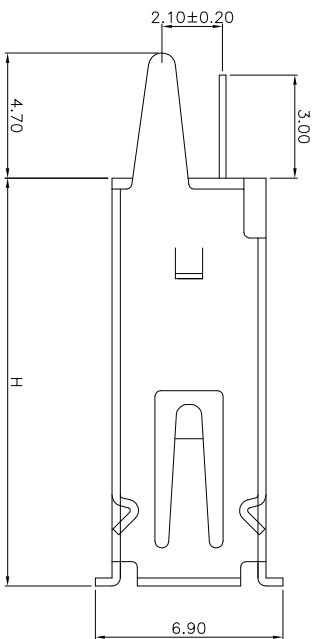


特性: Specifications;
电器: Electrical:
接触阻抗: Contact Resistance
30 millionms MAX


耐电压: Dielectric Withstanding Voltage:
500v AC AT Sea Level
绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MLN

机构: Mechanical:
接合为: Mating Force;
4.0 KG MAX 最大4Kg
拔出力: Unmating Force;
0.7KG MIN.最少0.7KG

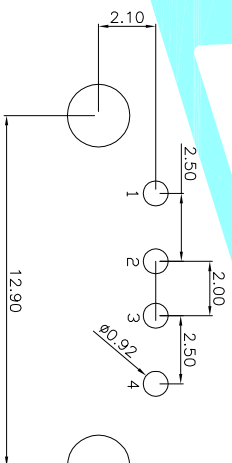

PART NO	H
U-A-24DD-Y-7	13.00
U-A-24DD-Y-8	13.70
U-A-24DD-Y-9	15.00

Recommended PCB Layout

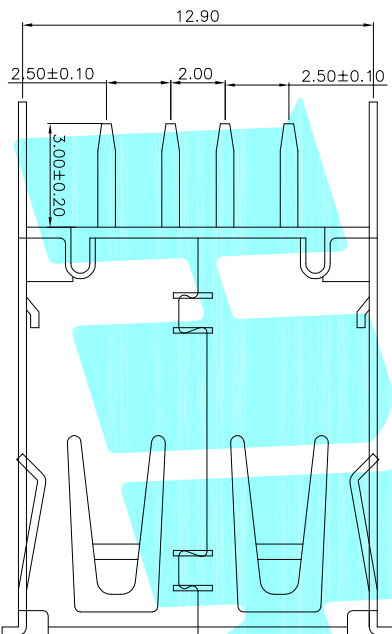

③	Base	—	1	NYLON	White
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING

APPROVALS		DATE	H300ELECTRONICS CO.,LTD		
DRAWN	JIANKUN.LU	2015.03.18	ELECTRONICS CO.,LTD		

CHECKED		TITLE:		USB CONNECTOR	
APPROVALS		PART NO.			
TOLERANCES ARE		30~以上 ±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30 ±0.25			PROJ: 1 OF 1
		5~10 ±0.20			
		~ 5 ±0.15			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.
	A		NEW		APPRO.