

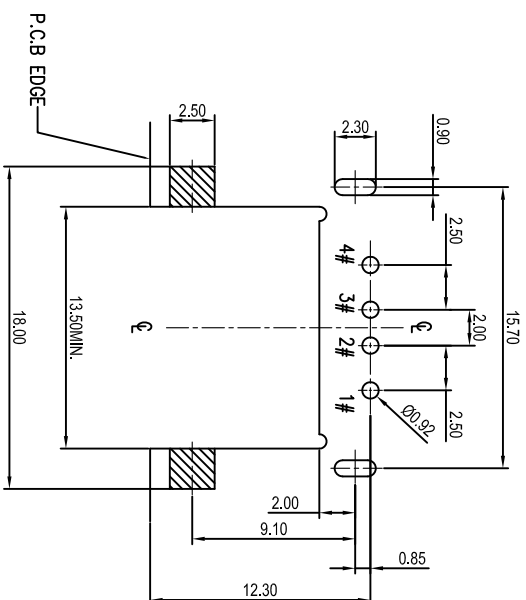
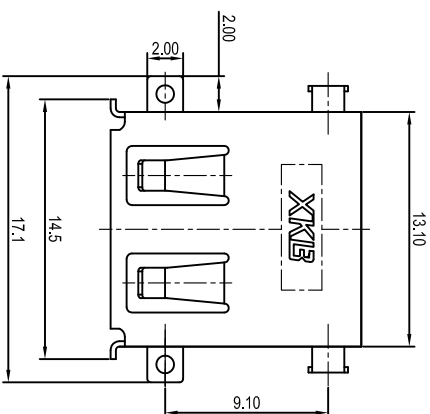



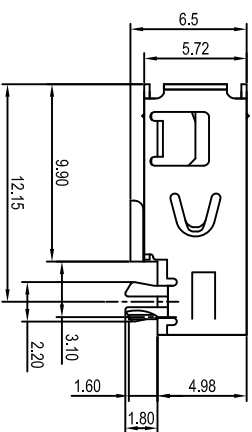

RECOMMENDED P.C.B LAYOUT(THICKNESS=1.2mm)
(COMPONENT SIDE) P.C.B. TOLERANCE: ±0.05

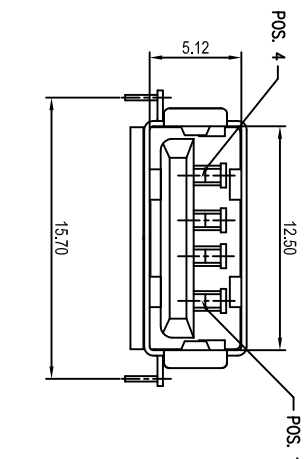

MATERIAL:
Housing Material: PA9T UL94V-0, Black
Contact Terminal: PHOSPHOR BRONZE (t=0.25mm).
Metallic Shell: SUS(t=0.30mm).
FINISH:
CONTACT: UNDER PLATED 50u" MIN. NICKEL ALL
OVER 100u" MIN. TIN IN SOLDERING
AREA GOLD PLATED IN CONTACT AREA.
SHIELD: N-PLATED WITH 40u" THICKNESS NICKEL
OVER 50u" MIN. THICKNESS CU.

U221-04XN-3BU04-SS

1:AU 1U"
5:AU 15 U"
6:AU 30U"
S: SUS
S: Scrolls F: Flat
W: WHITE B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

						DSND		DATE		SCALE: N/A	MODEL TYPE: USB 2.0
Δ X						DWN		DATE		VIEW:	PART NO.: U221-04XN-3BU04-SS
Δ X						CHKD		DATE		UNIT: mm	DWG NO.: U221-04XN-3BU04-SS
Δ X						APPD		DATE		SIZE: A4	
REVISIONS						XKB INDUSTRIAL PRECISION CO., LIMITED					
	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	WGT	SHEET	REVISION			
						1.0g	1/1	A0			