

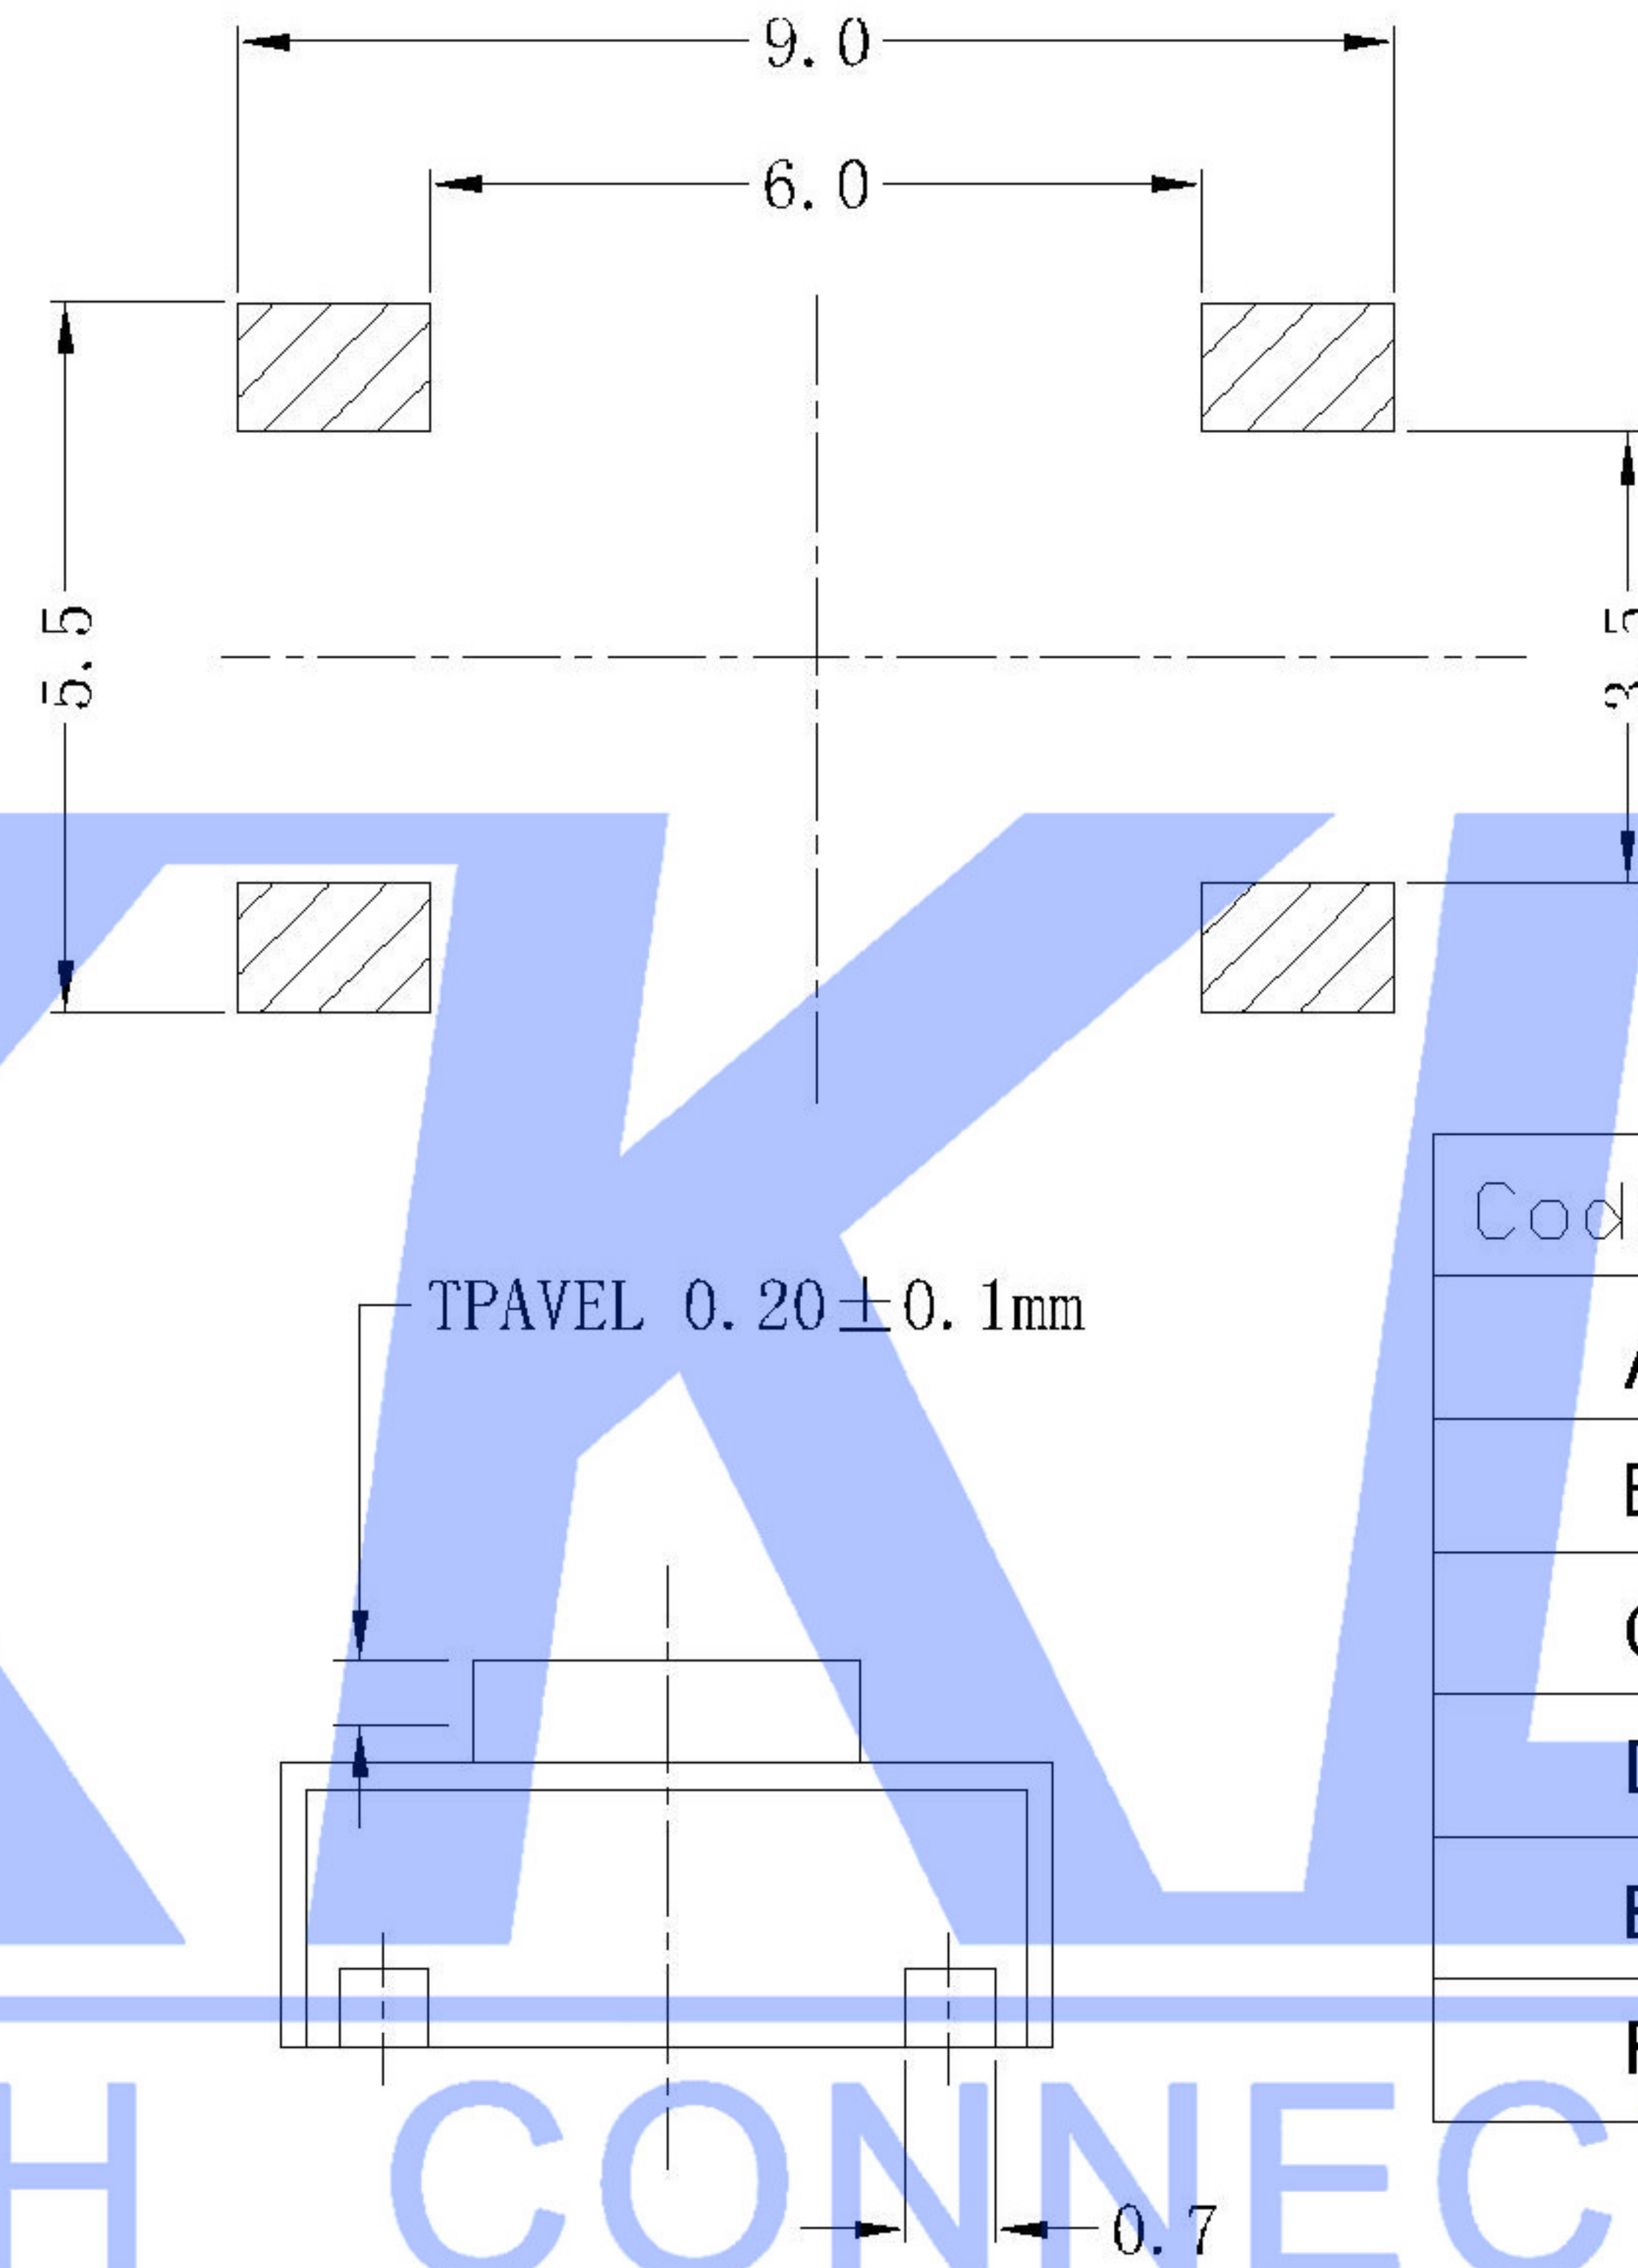


P.C.B LAYOUT

TOP VIEW

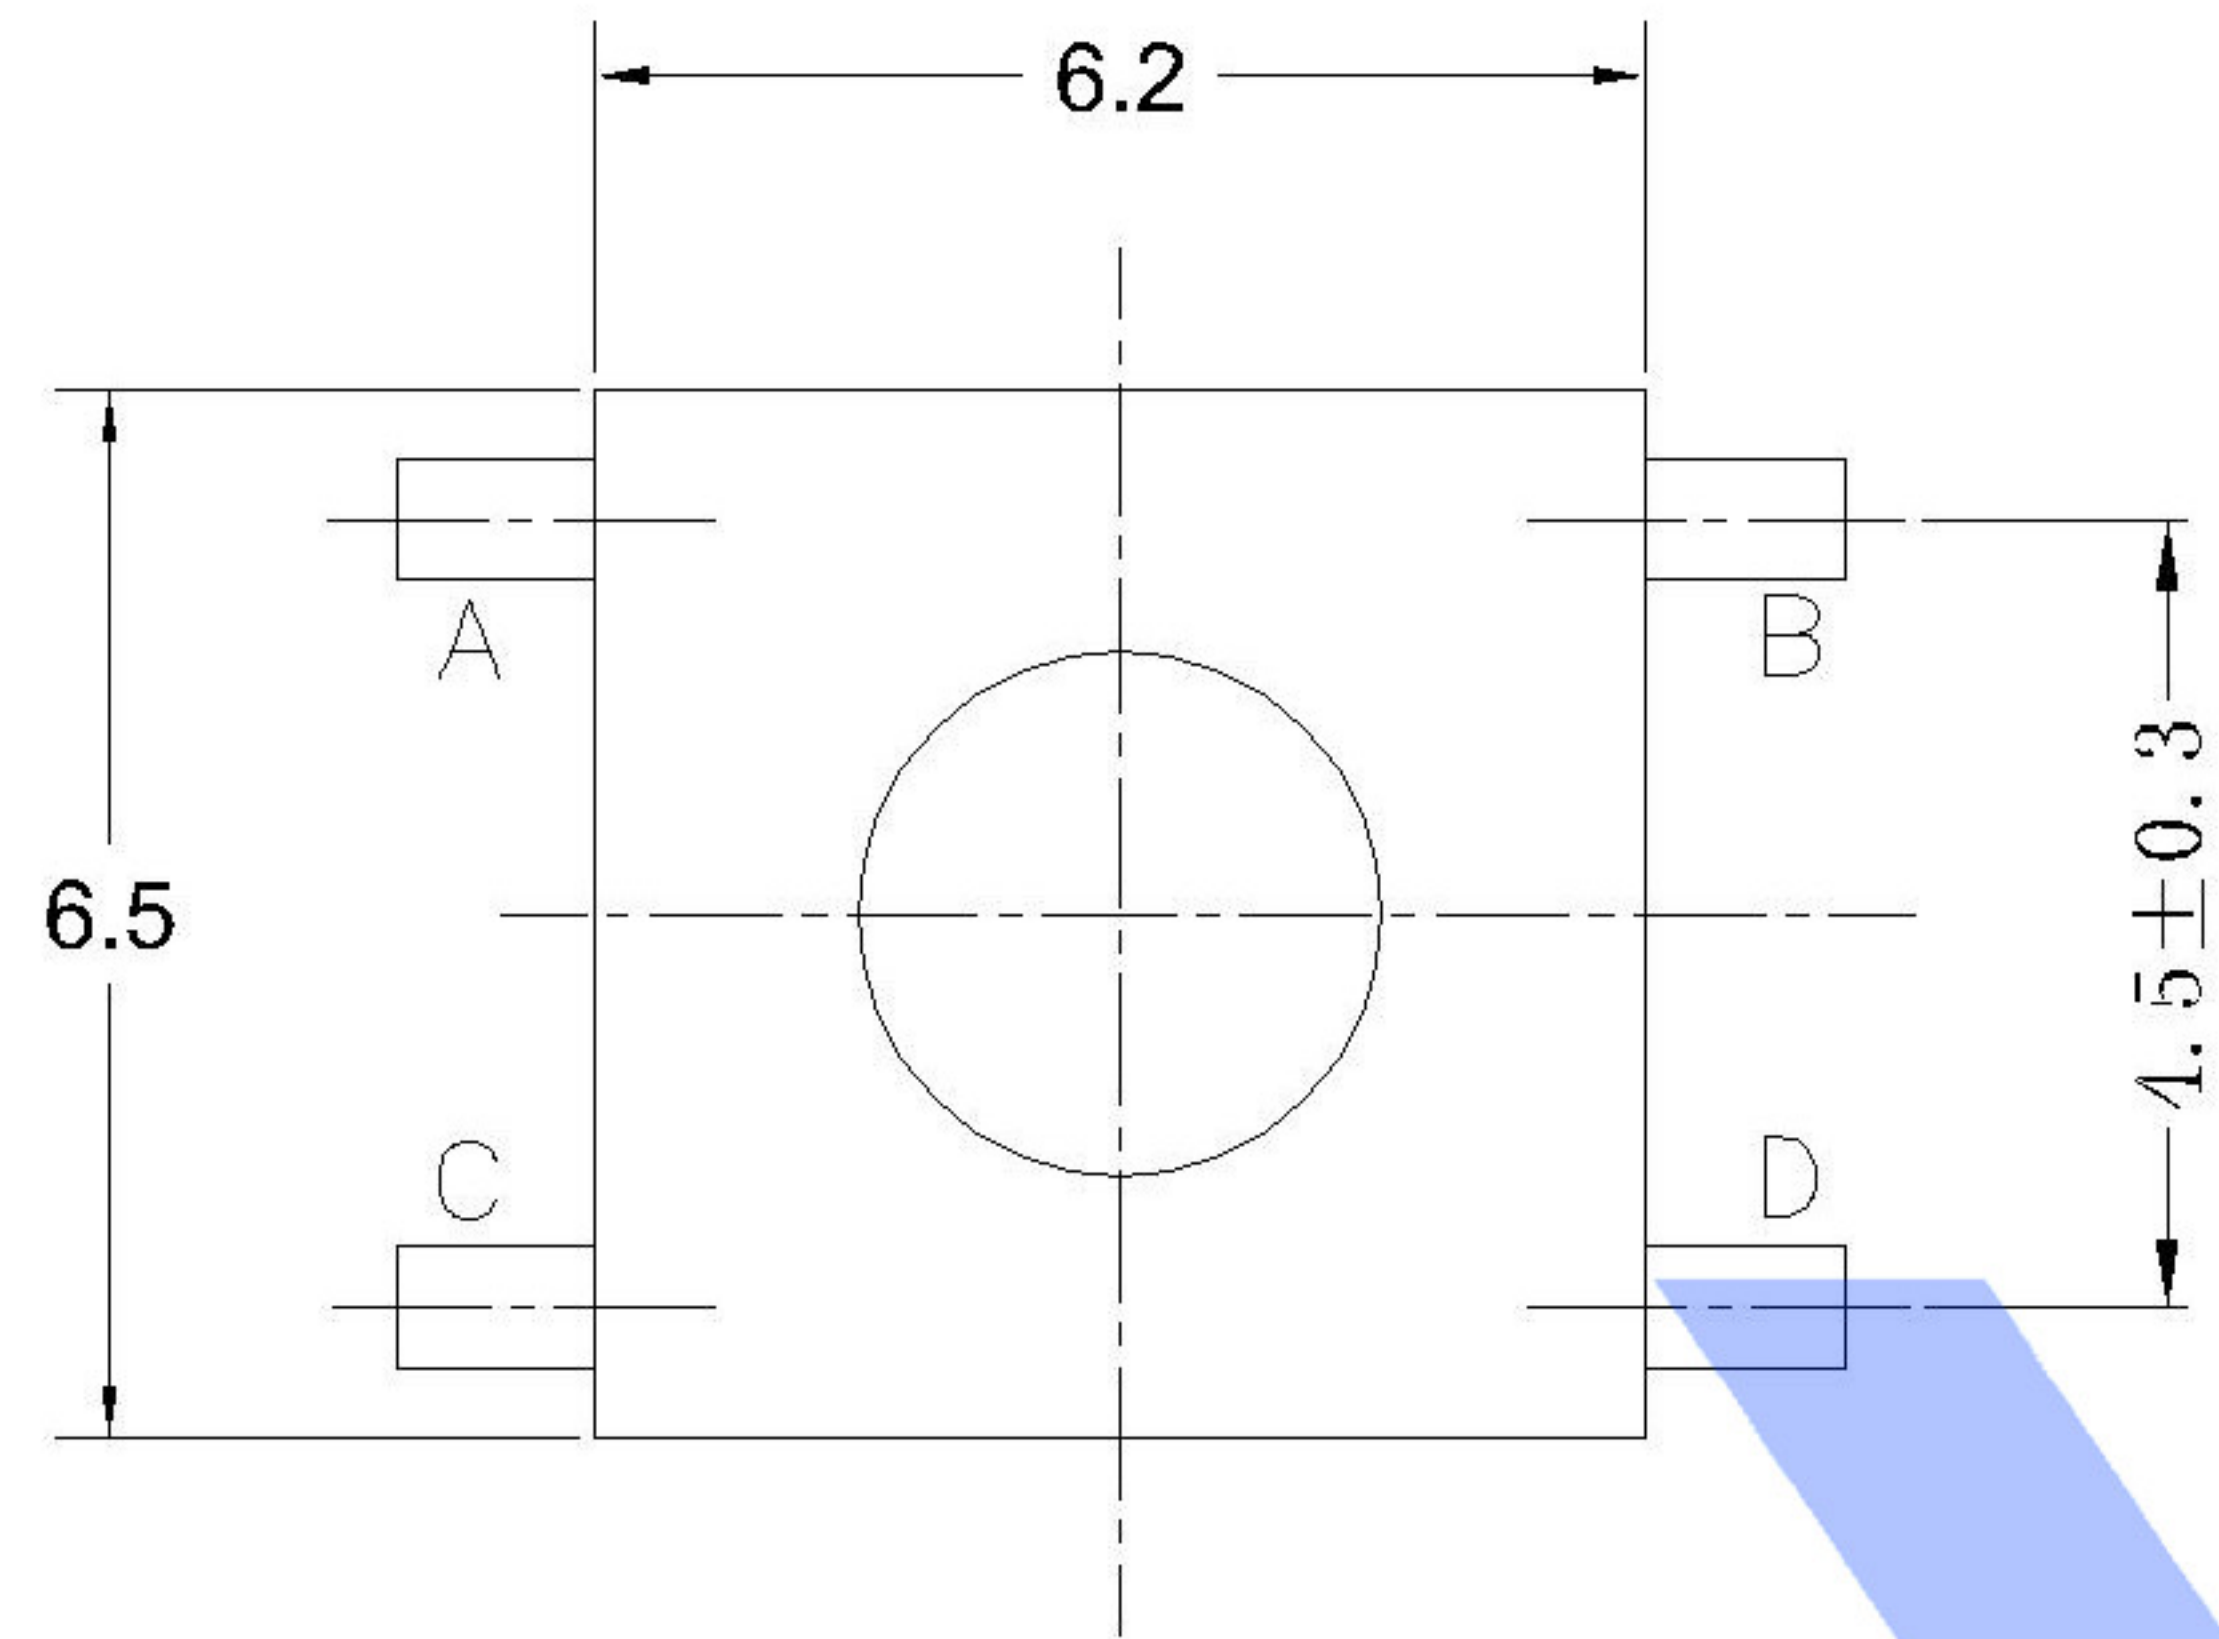

SCHEMATIC

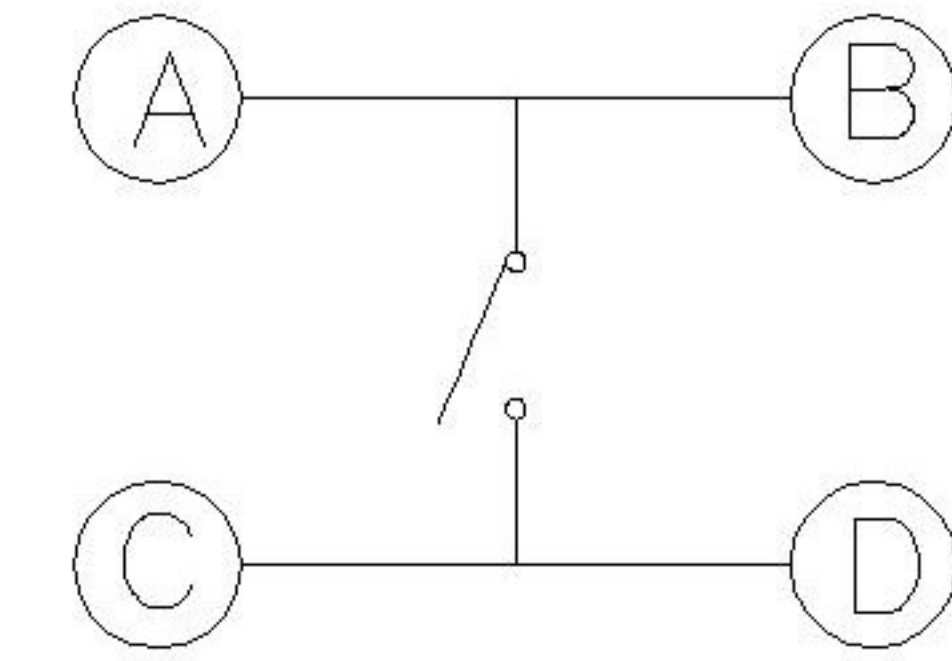

Code-X	H
A	2.5
B	3.1
C	3.4
D	3.7
E	4.3
F	5.0

PAPT NO	TS-1157-X-X
Operating Force	A: 100gf B: 160gf C: 260gf
Height	Code-X

SPECIFICATION

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

⑤	Terminal	——	4	Brass (0.30t)	Plating silvering	———
④	Contact	——	1	F.ag/Sus	Natural	———
③	Base	——	1	Pa46		———
②	Cover	——	1	Spcc	Plating Nickel	———
①	Keystake	——	1	Pa46		———
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
△ X					tolerance:	CHKD		DATE		UNIT: mm	DWG NO.:		
△ X					X.X ±0.2mm						TS-1157-X-X		
△ X					X.XX ±0.1mm	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm	XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
REVISIONS						UNSPECIFIED TOLERANCES					1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn													