



P.C.B LAYOUT
TOP VIEW

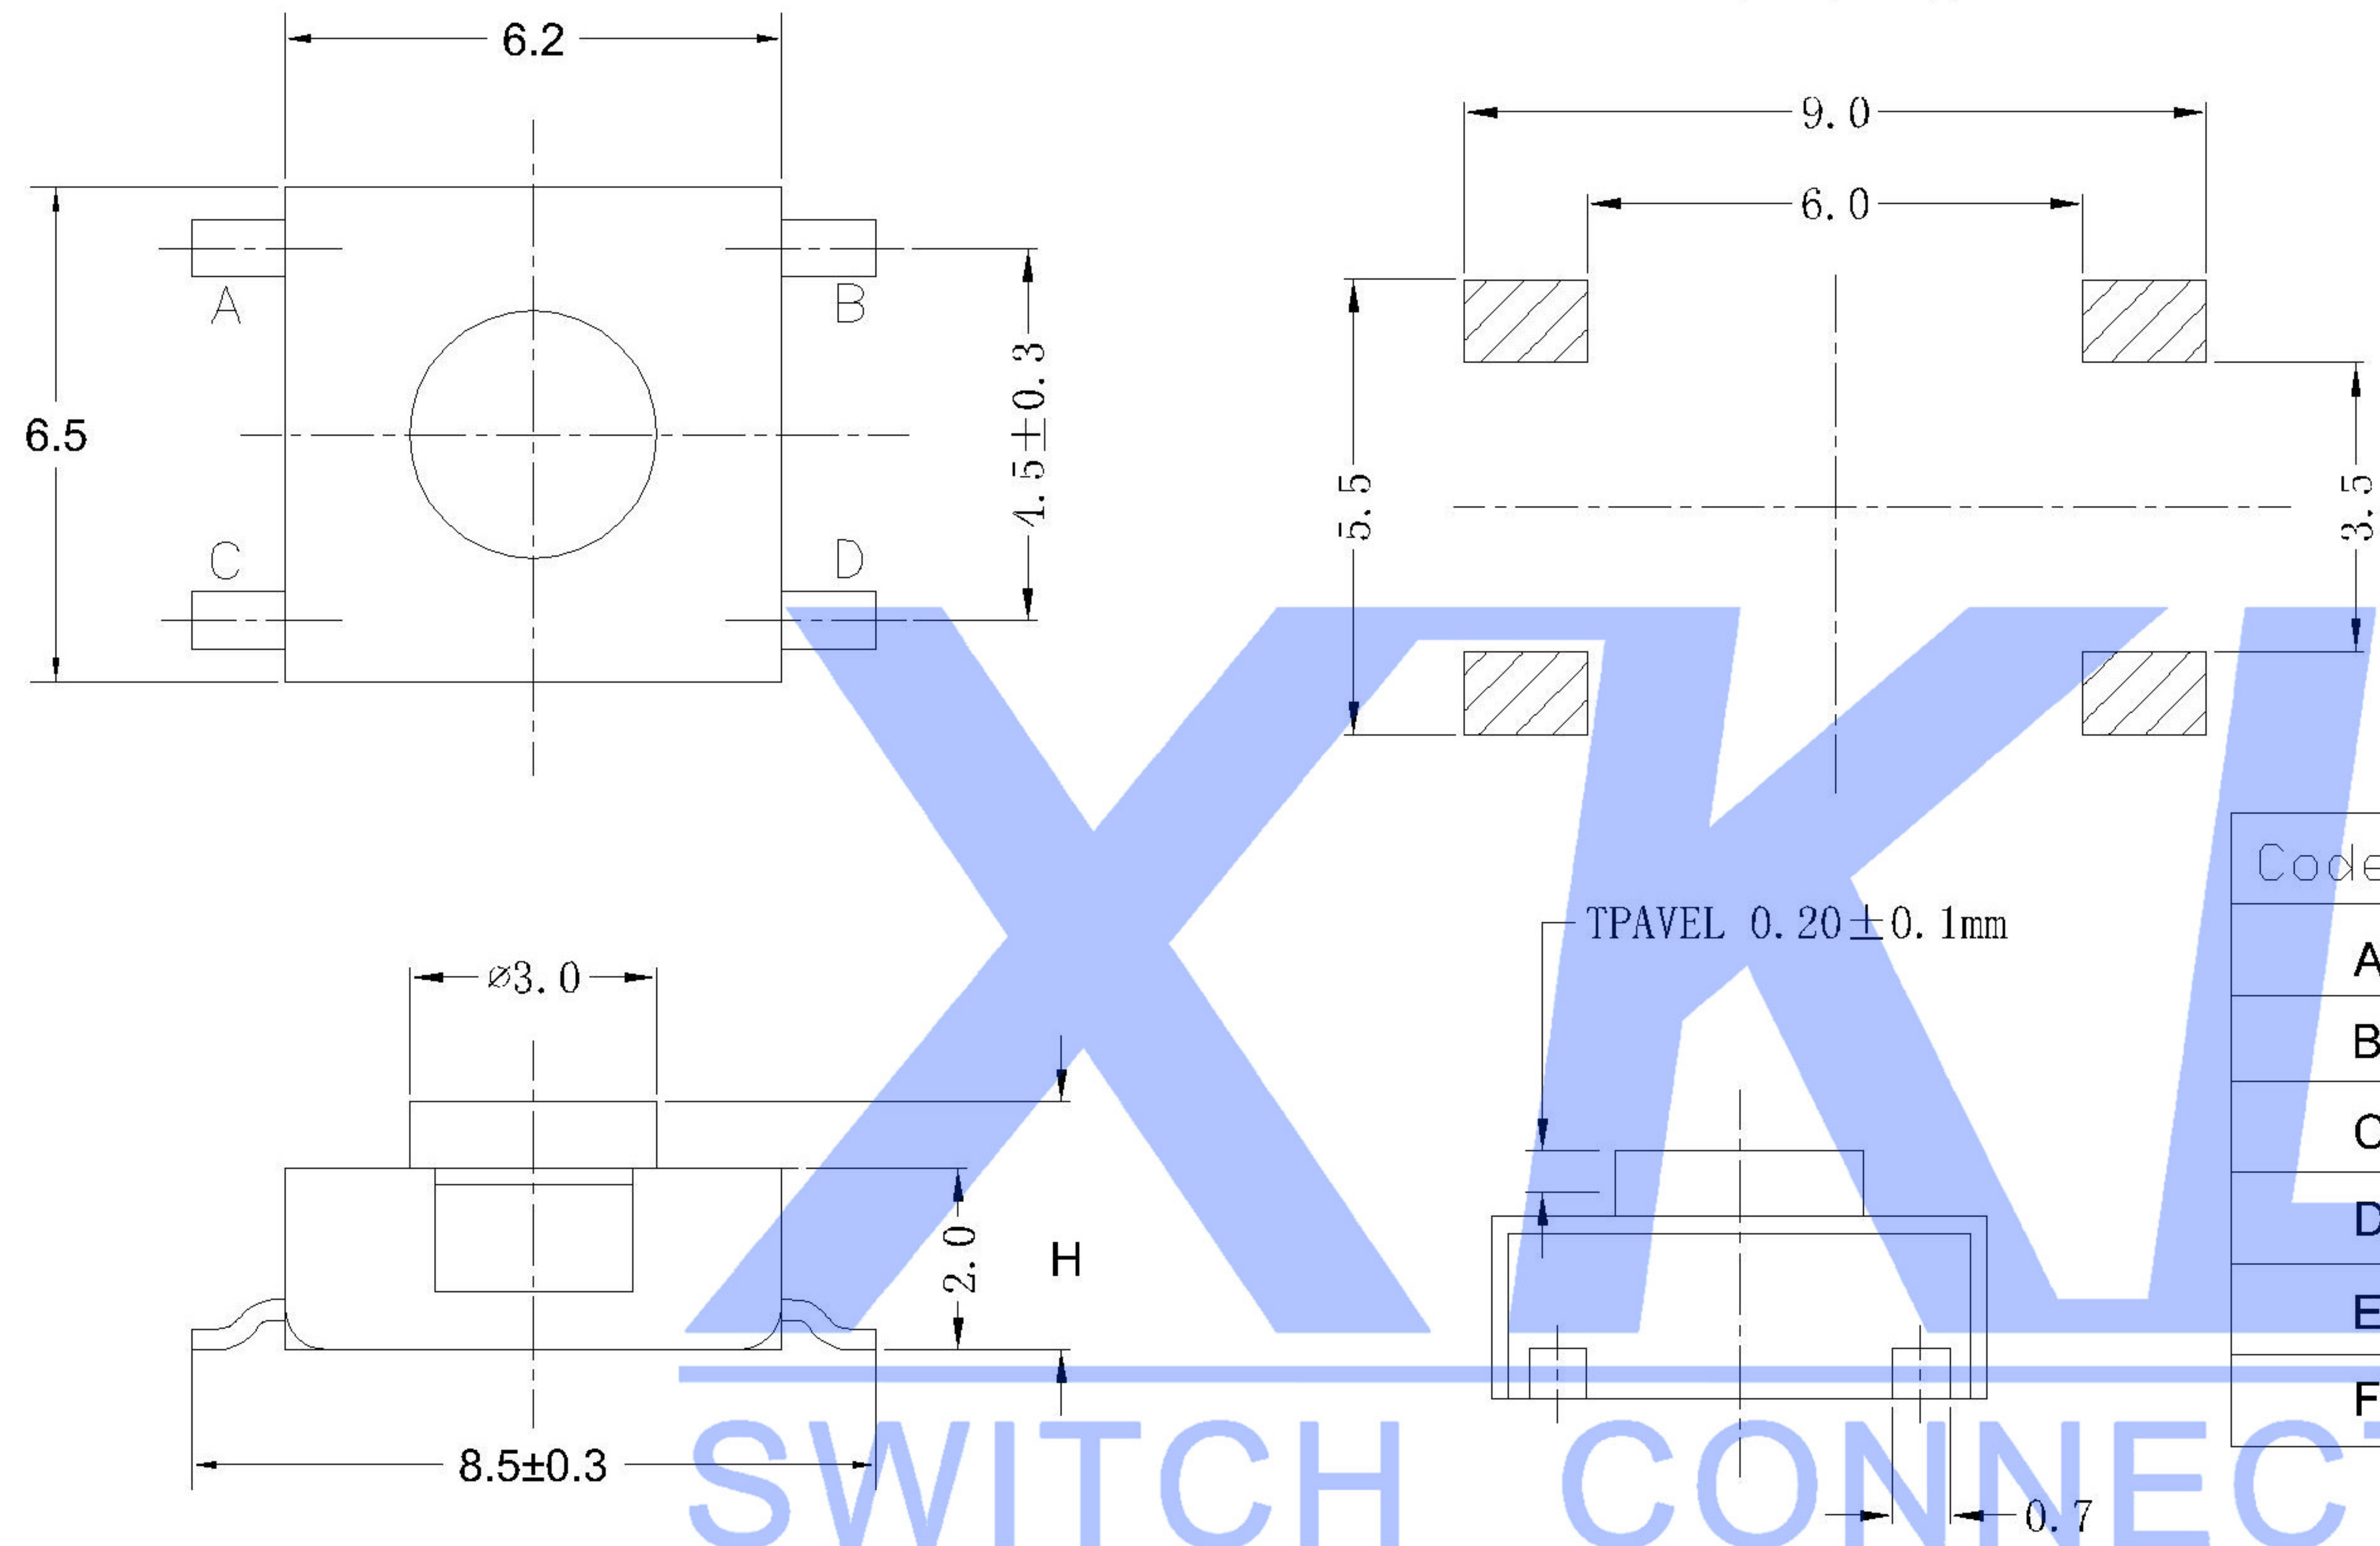

SCHEMATIC

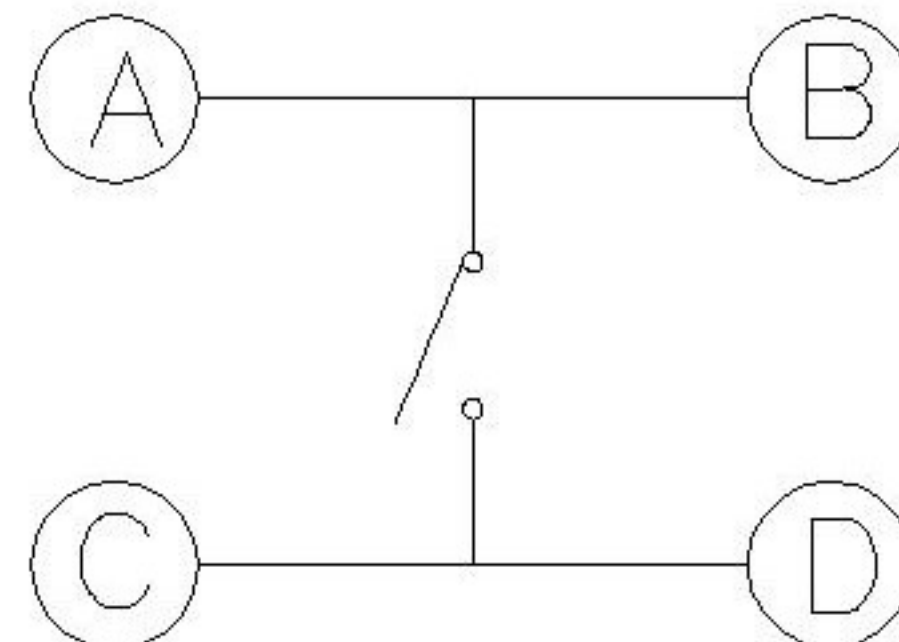


Code-X	H
A	2.5
B	3.1
C	3.4
D	3.7
E	4.3
F	5.0

PAPT NO	TS-1157-X-X
Operating Force	A: 100gf B: 160gf C: 260gf
Height	Code-X

SPECIFICATION
Contact Rating: 50mA, 12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100mΩ min. 500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.25mm
Operating Temp: -30℃~+85℃
Storage Temp: -30℃~+80℃

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH				
					units: mm	DWN		DATE		VIEW: 	PART NO.:				
△X					tolerance:	CHKD		DATE		UNIT: mm	DWG NO.:				
△X					X.X ±0.2mm						TS-1157-X-X				
△X					X.XX ±0.1mm										
MARK	DESCRIPTION			DATE	REVISED	APPROVED	X.XXX ±0.05mm	APPD		DATE		SIZE: A4			
REVISIONS						UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION	
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn												1.0g	1/1	A0	