


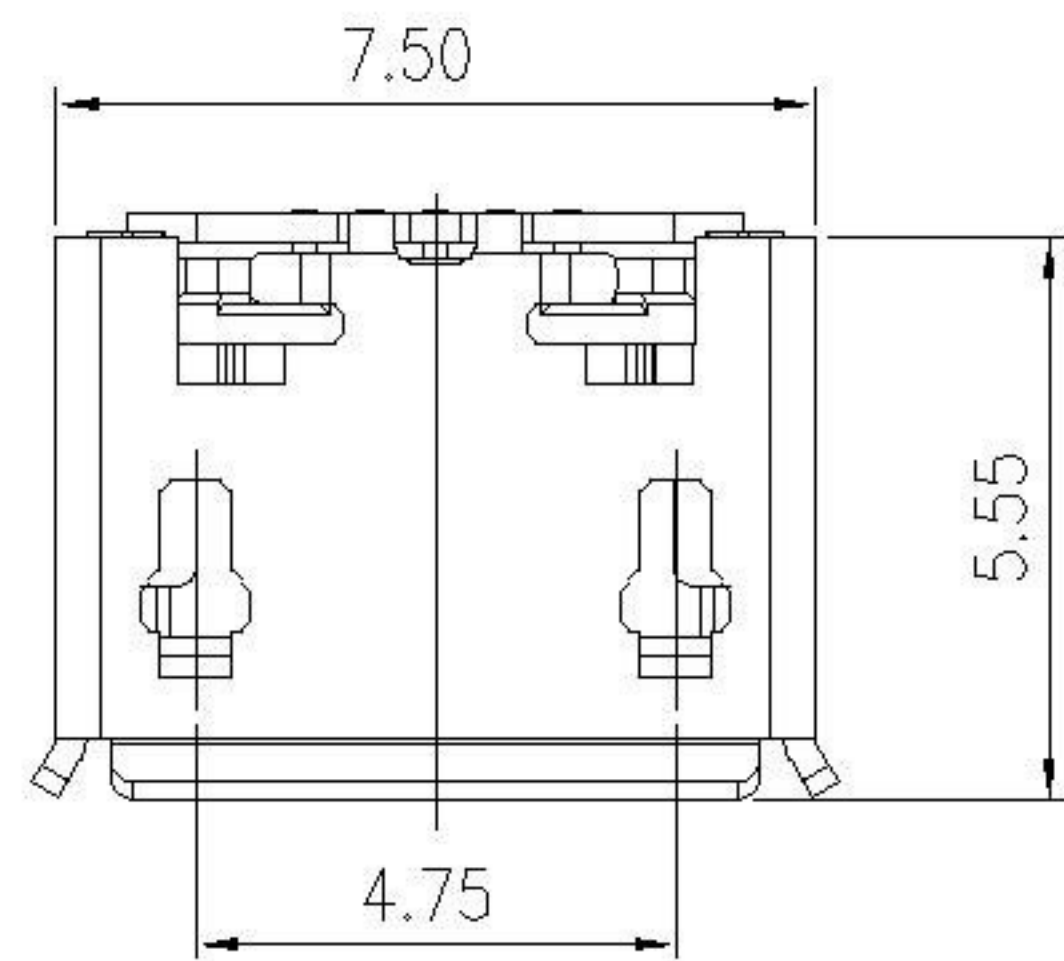
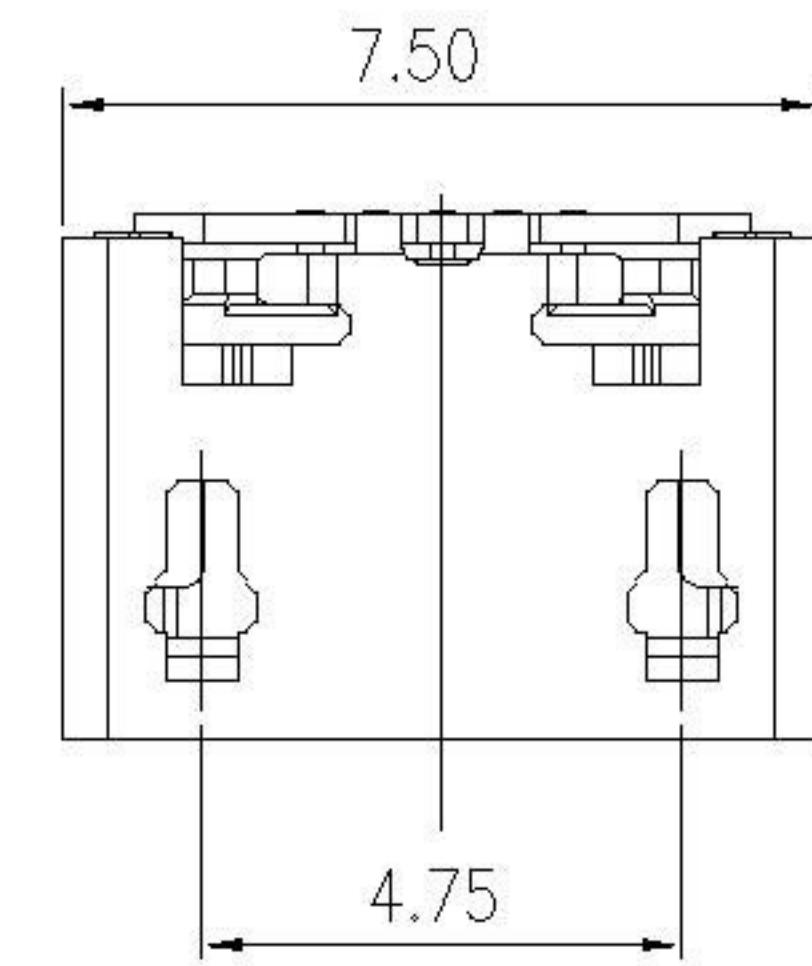
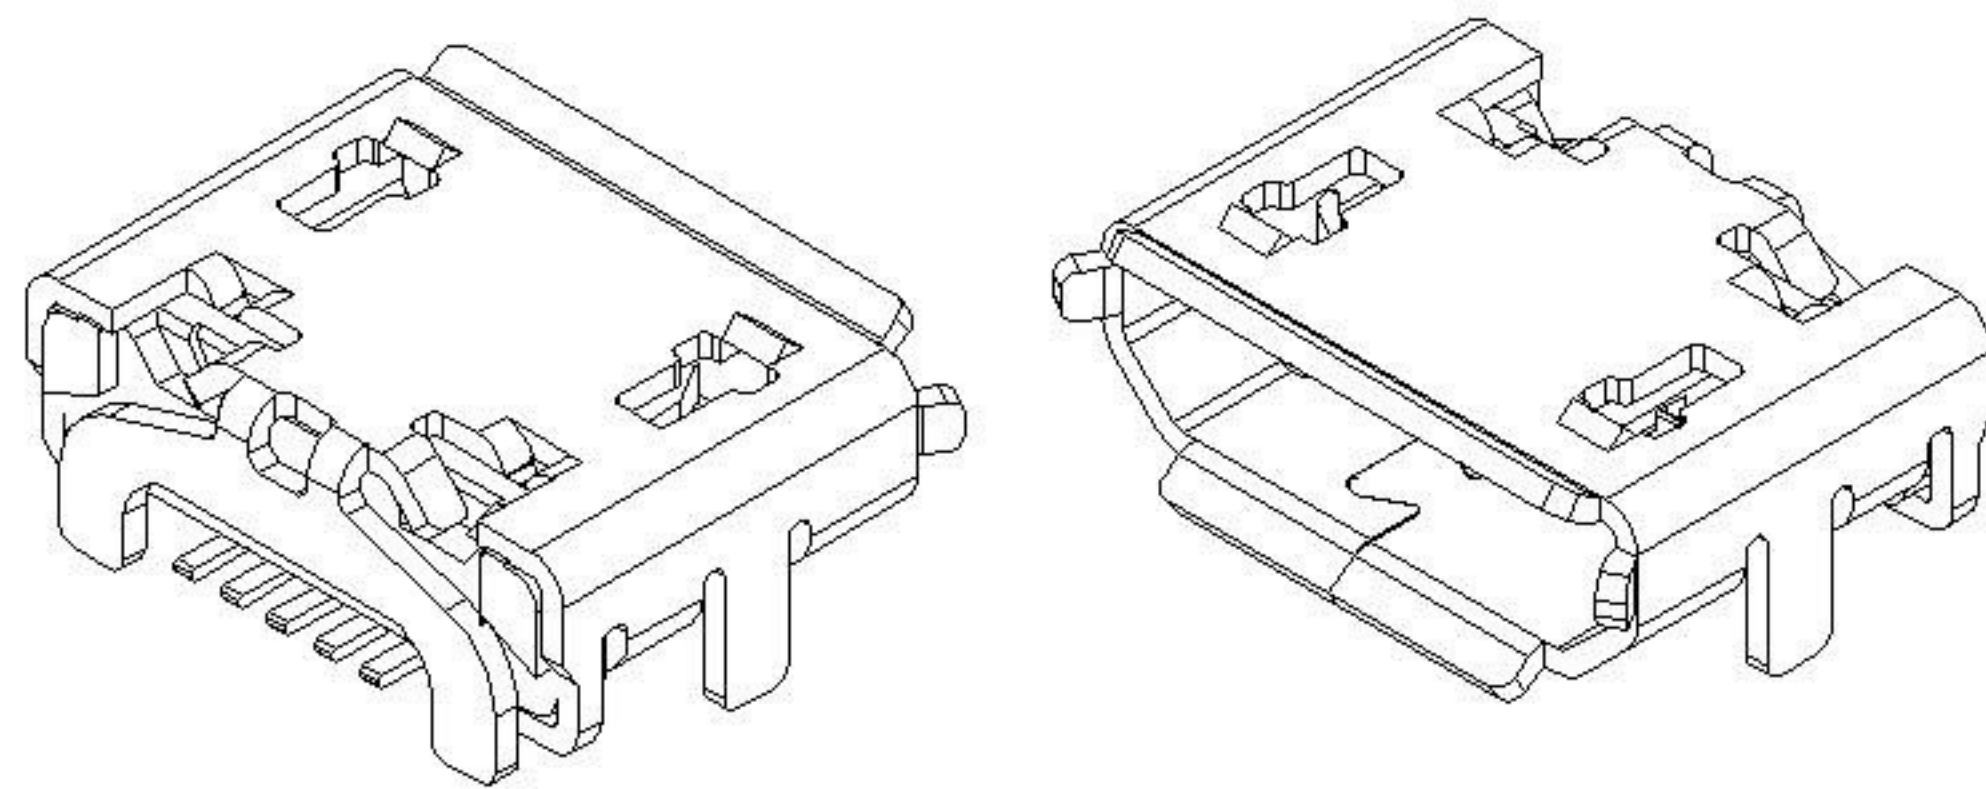
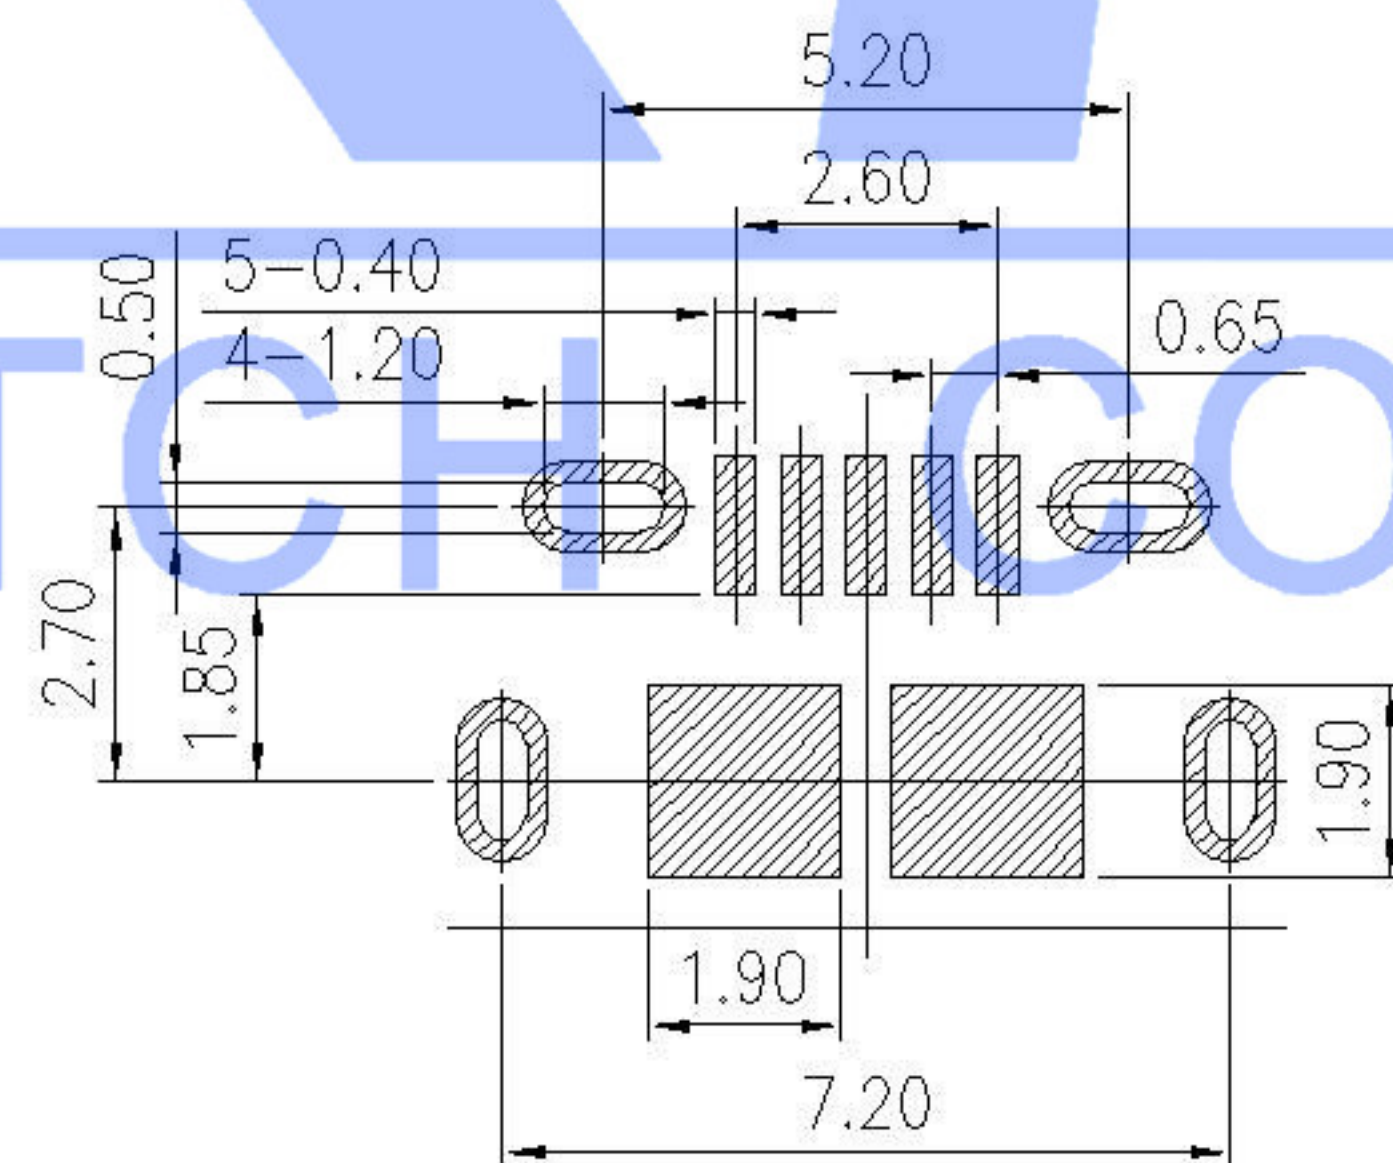
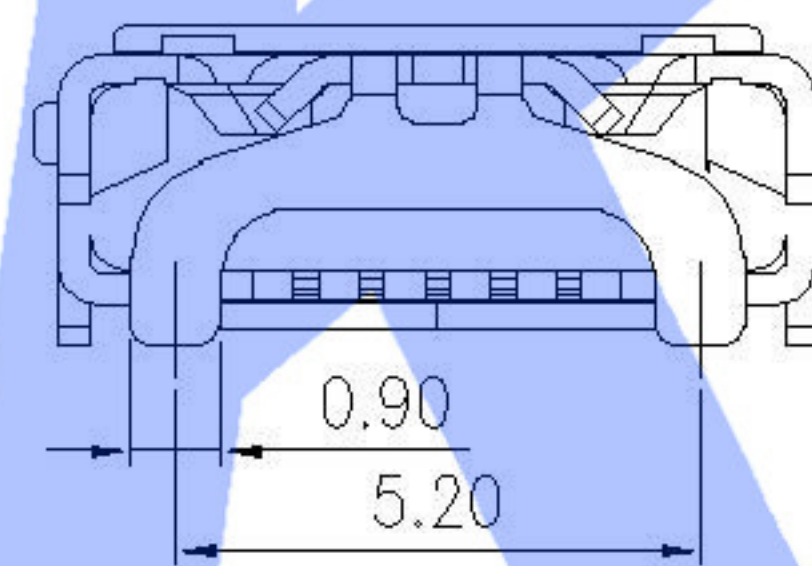


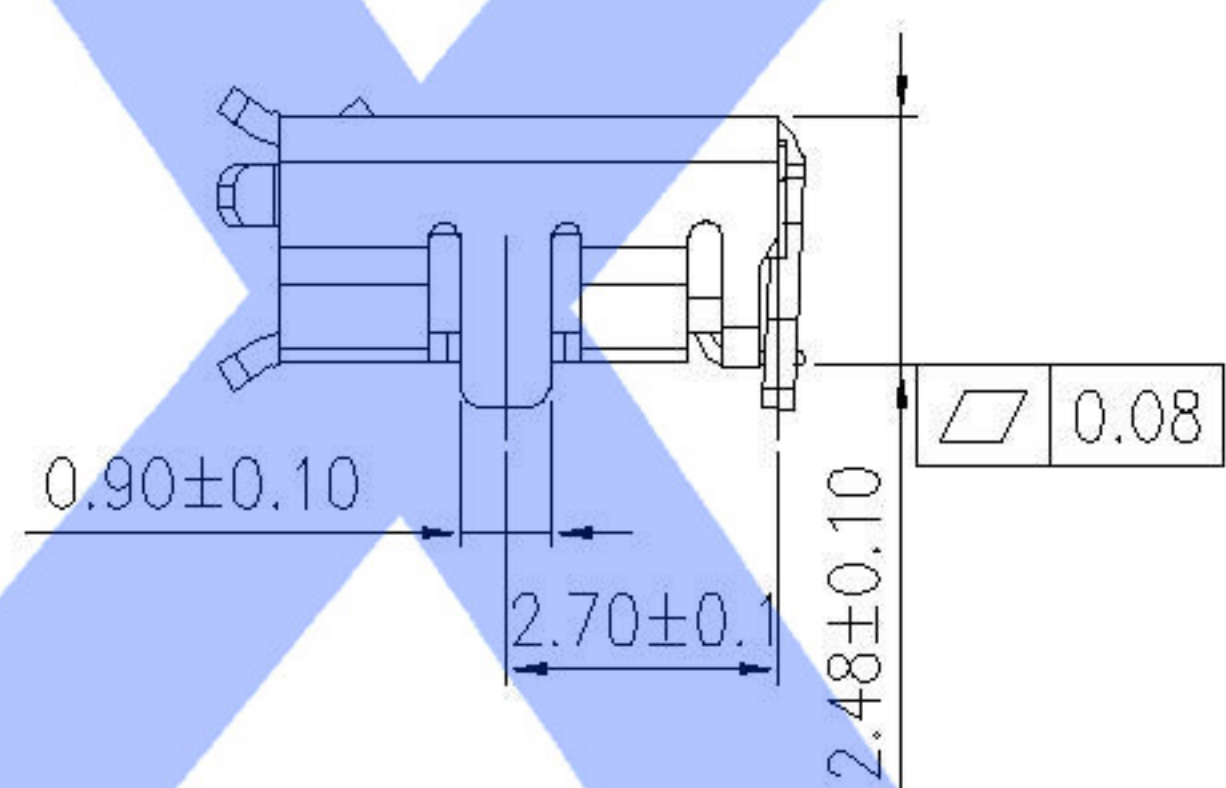

Scrolls (S)

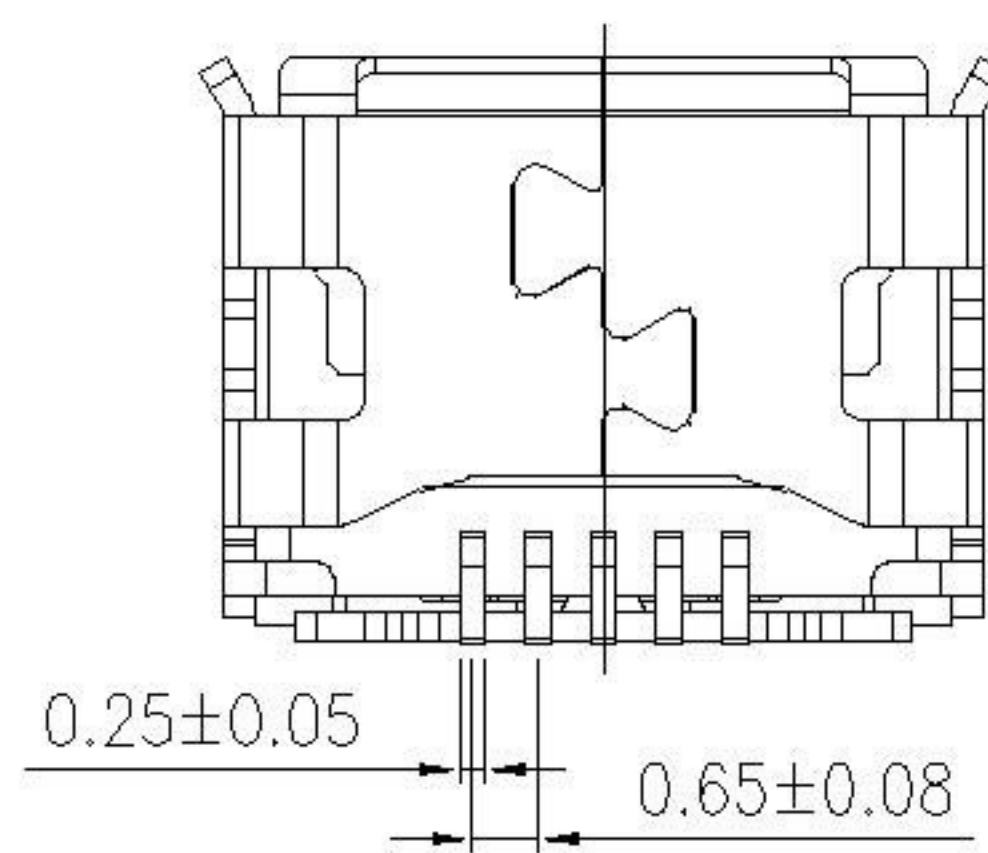

Flat(F)

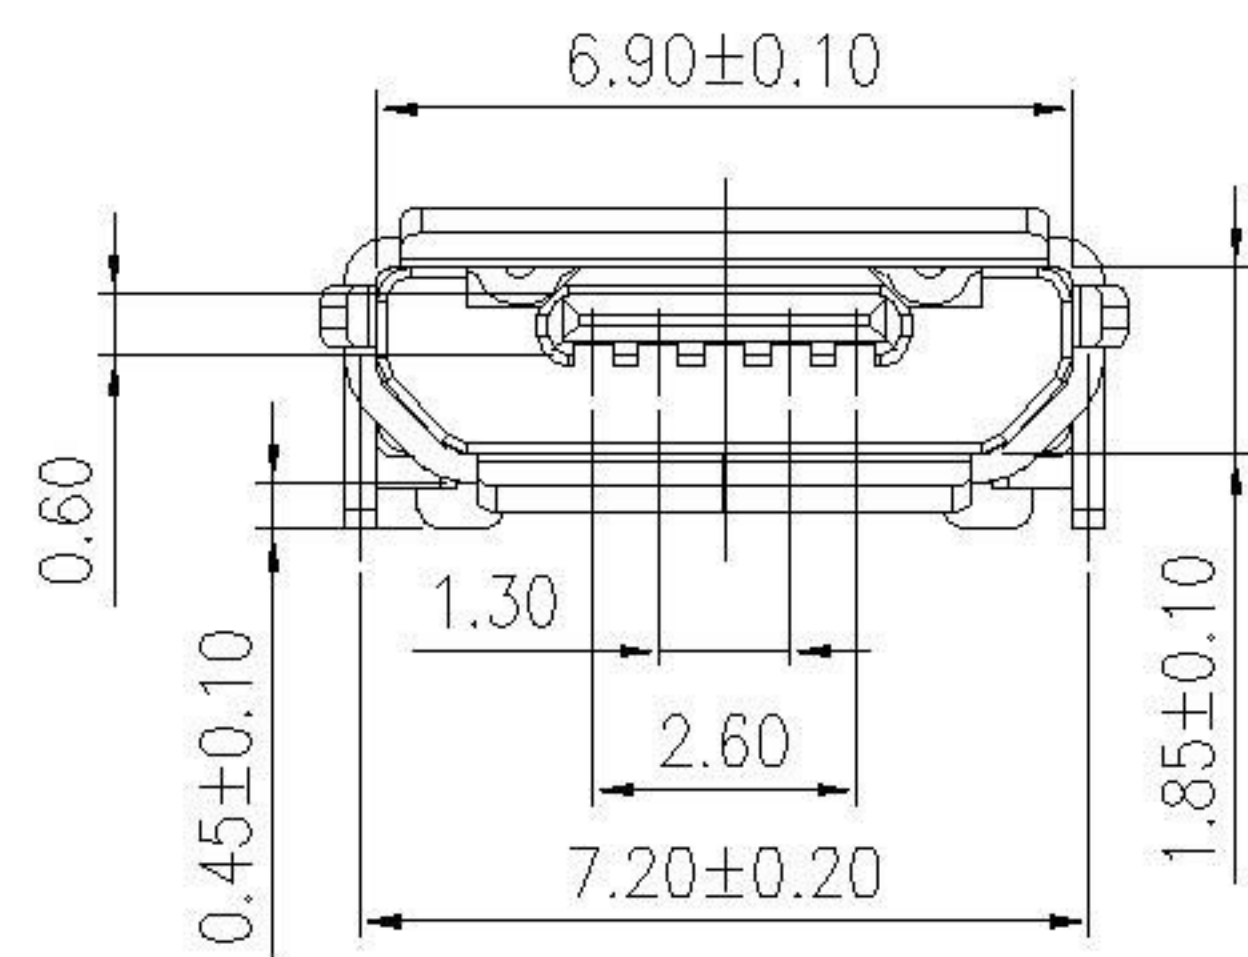

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

NOTES:

- MATERIAL&FINISH:SEE TABLE A;
- SPECIALITY:
 - RATED CURRENT:1.8A For Pin1.5
0.5A For Pin 2.3.4
 - RATED VOLTAGE:30V
 - CONTACT RESISTANCE:30mΩ Max
 - INSULATION RESISTANCE:1000MΩ Min 500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE:100V AC 1Min.
 - SOLDER ABILITY:255±5℃, 5±0.5S.
 - DURABILITY:5000 CYCLES Min.
 - OPERATING CONDITION:TEMPERATURE-40℃~+85℃;
HUMIDITY 80% R.H Max
- MECHANICAL:
 - INSERTION FORCE:35N Max
 - EXTRACTION FORCE:8N Min
- PLEASE CONTACT JITS SALES REPRESENTATIVE TO
VERIFY PRODUCT DETAILS & AVAILABILITY

U254-05XN-4BH24 -X2S

- 1:1Au 1U"
5:1Au 15U"
6:1Au 30U"
T:TIN
N:NICKEL
- S:Sus
2: Without
S: Scrolls F: Flat
- B:BLACK W:WHITE
- 1:PBT
2:PA6T
3:PA9T
4:LCP

						DSND		DATE		SCALE: N/A	MODEL TYPE: MICRO USB		
△X						DWN		DATE		VIEW:	PART NO.:		
△X						CHKD		DATE		UNIT: mm	DWG NO.:		
△X						APPD		DATE		SIZE: A4	U254-05XN-4BH24 -X2S		
MARK	DESCRIPTION	DATE	REVISED	APPROVED							WEIGHT	SHEET	REVISION
REVISIONS						UNSPECIFIED TOLERANCES					1.0g	1/1	A0
www.xk-dg.cn www.1k0k.com www.1k0k.cn						XKB INDUSTRIAL PRECISION CO.,LIMITED							