
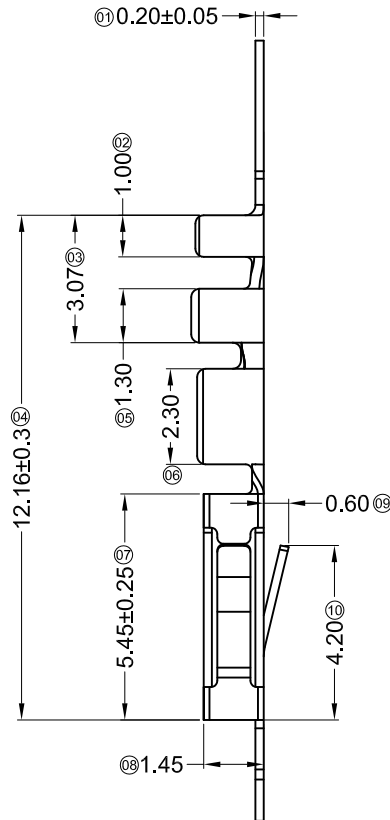





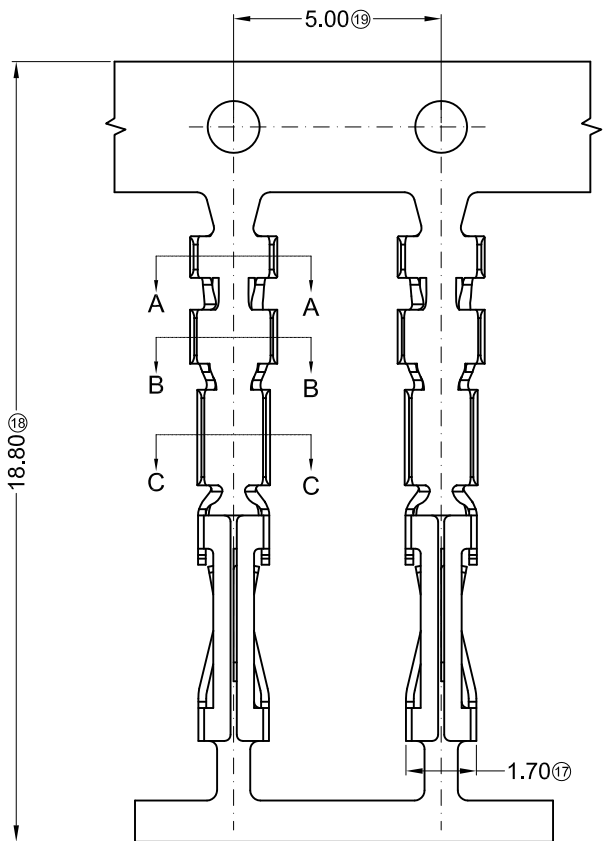


Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 20m\Omega$
- After environmental testing: $\leq 30m\Omega$

X2530 T F-P SN X-X

- ① ② ③ ④ ⑤ ⑥ ⑦
- ① Series Number
 - ② Category: T-terminal
 - ③ Shape: F-Female
 - ④ Material: P-Phosphor Bronze
 - ⑤ Plating style: SN-Bright tin plating
 - ⑥ Plating method:
Blank-Stamping before plating
 - ⑦ Mold No./Mark/Special No.

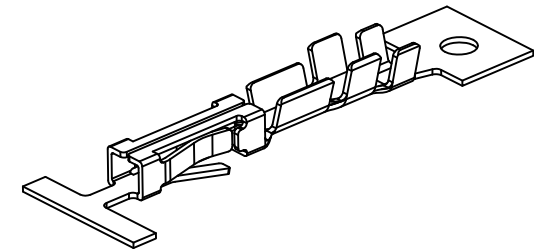

X2530TF-PSN	Phosphor Bronze	AWG#22-26	1.55mm(Max)	Stamping Before Plating: 30u" Ni;70u"Sn	X2530H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					ANGULAR ±5°
△ X					L ≤ 4 ±0.2
△ X					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

DSND		DATE		SCALE: N/A	MODEL TYPE: X2530TF-PSN
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	2.54mm Crimp Style Connectors
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT 1.0g	SHEET 1/1
				REVISION A0	