


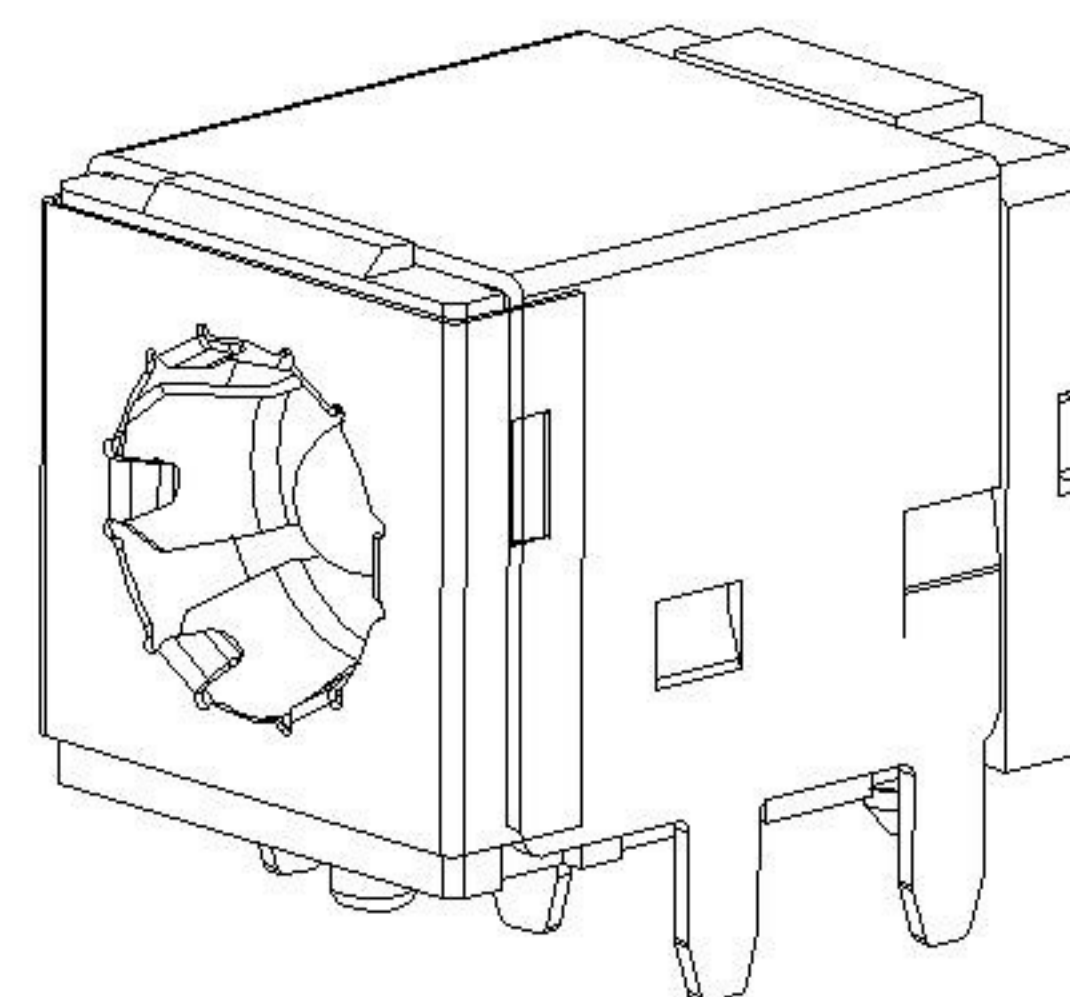
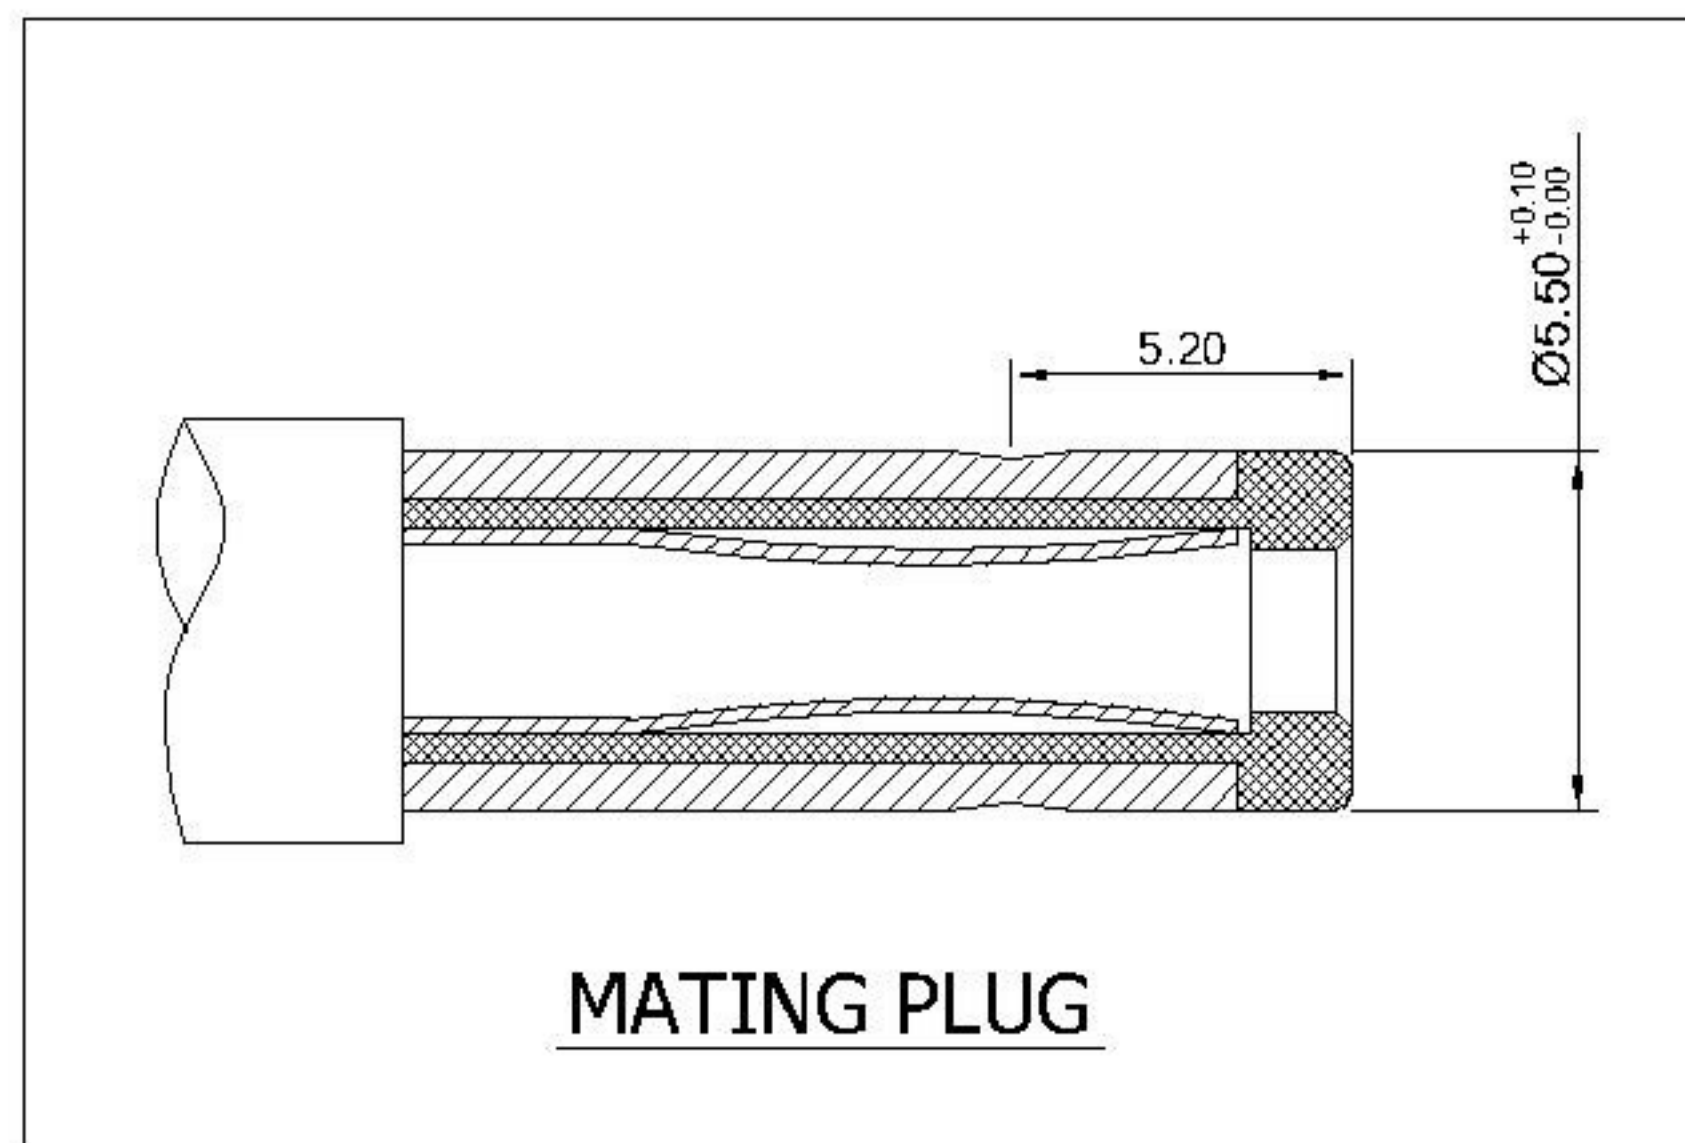
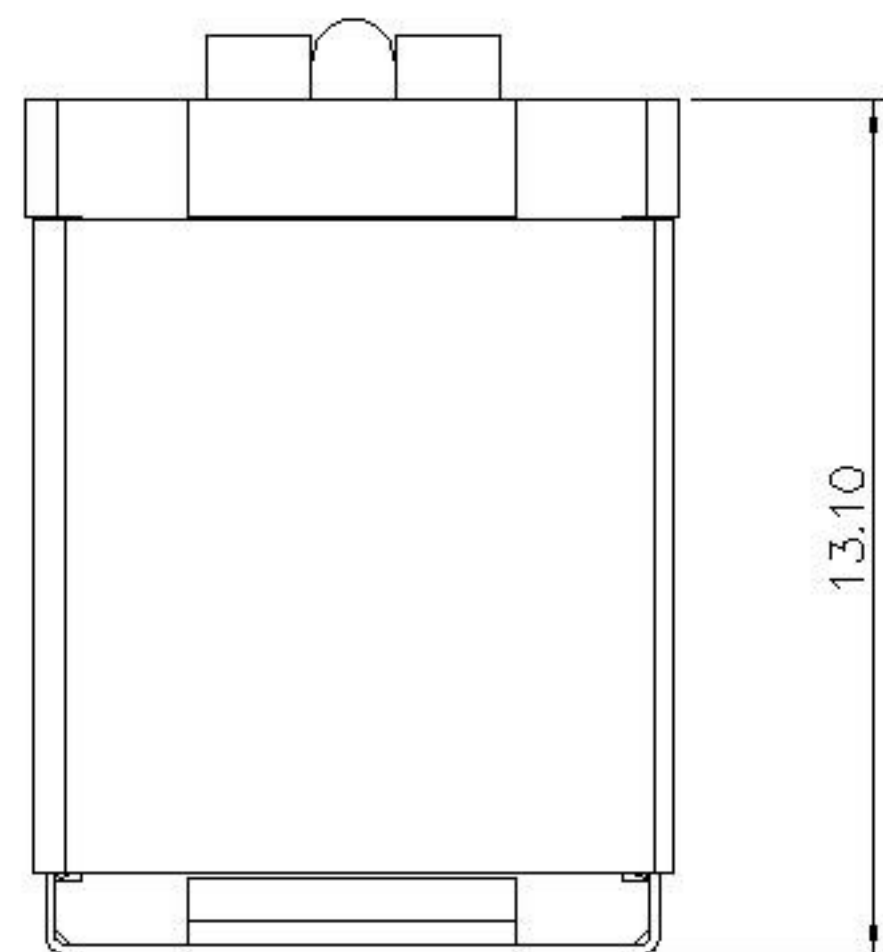
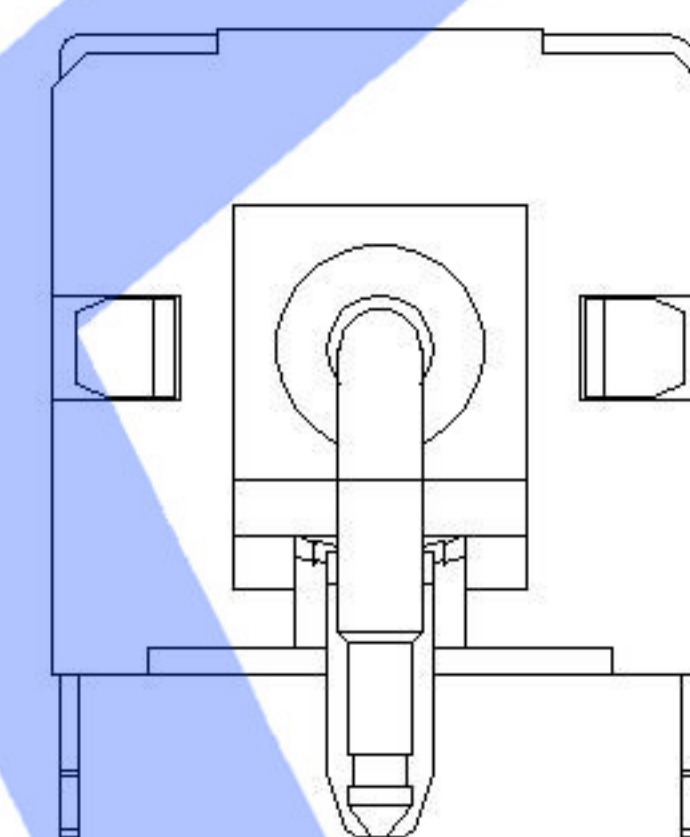
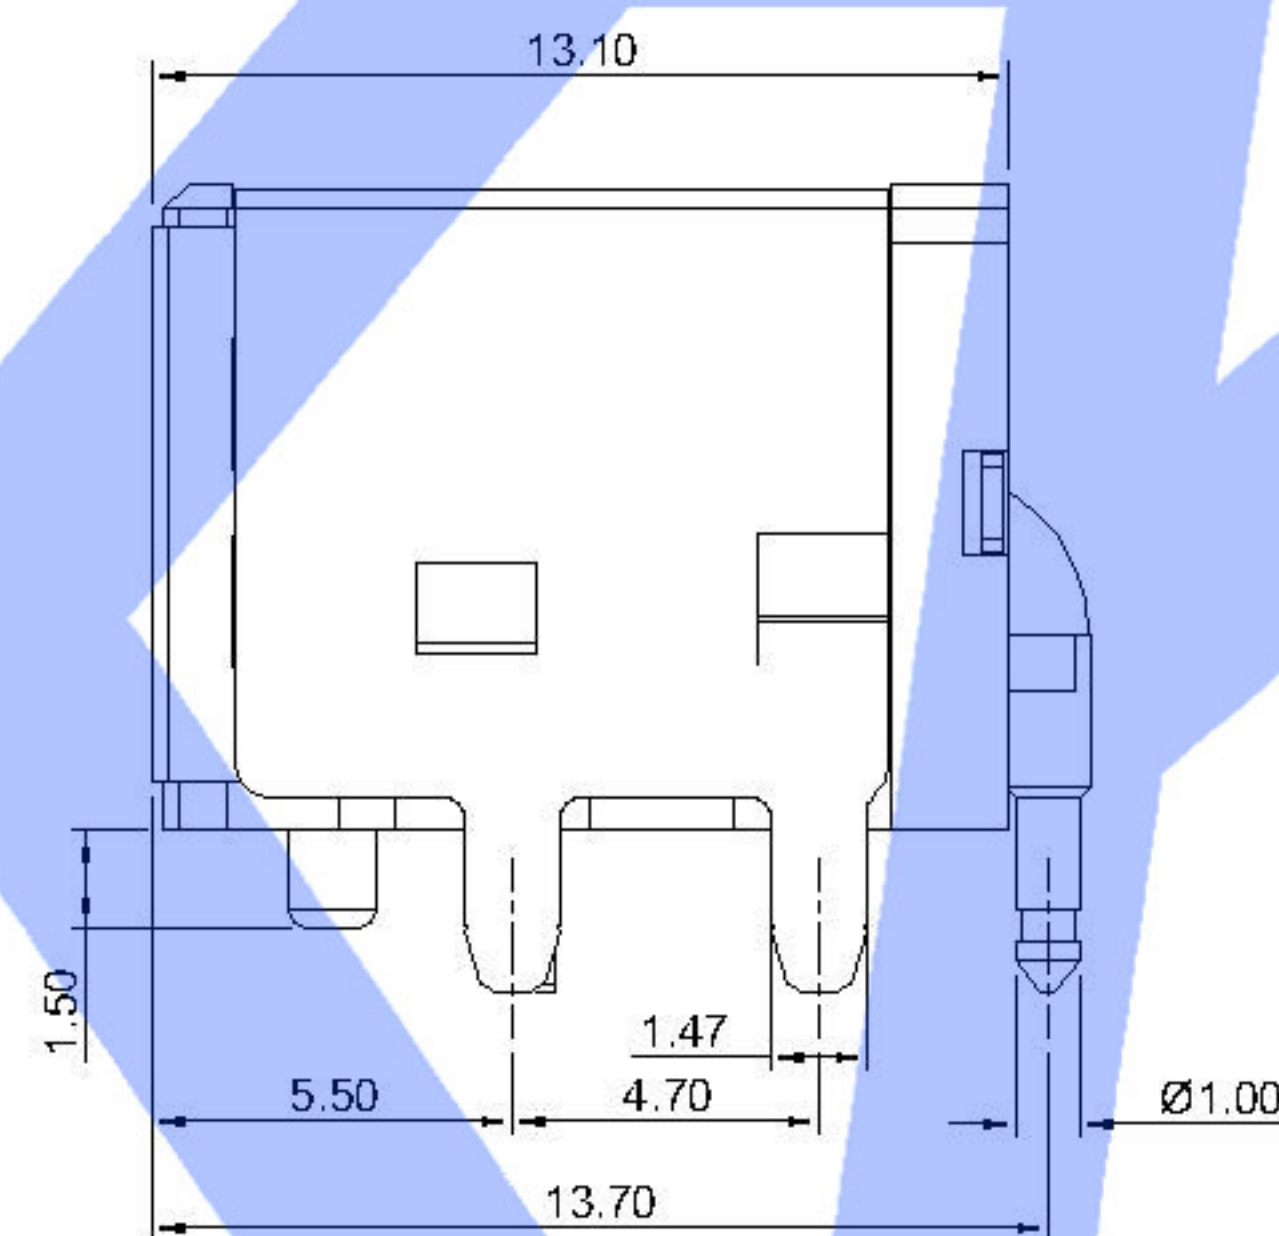


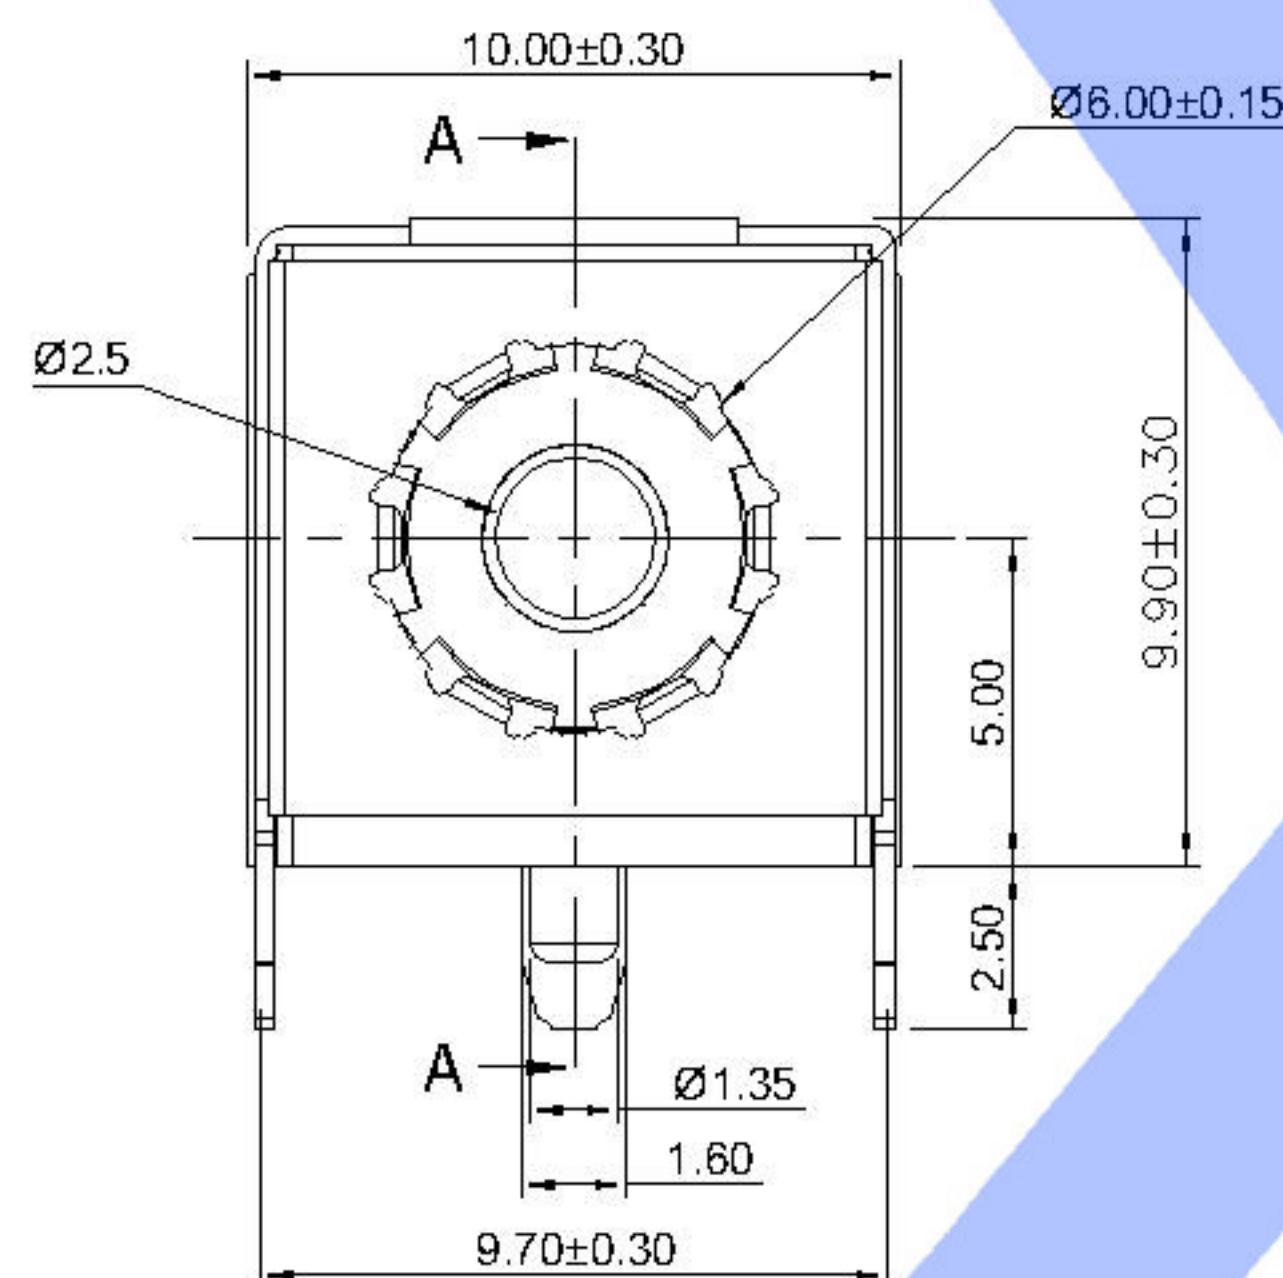

P. C. B LAYOUT


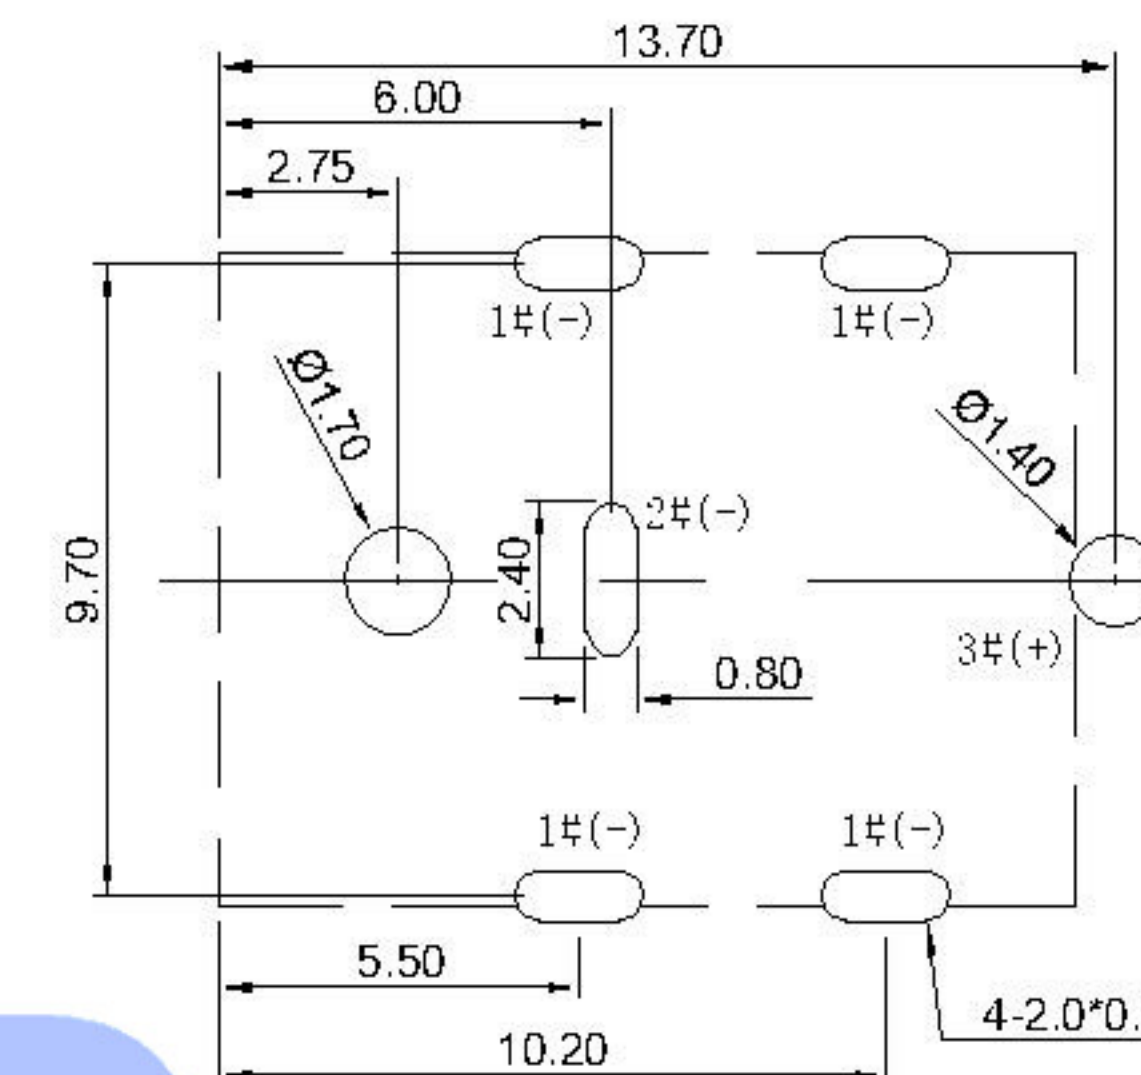


SCHEMATIC

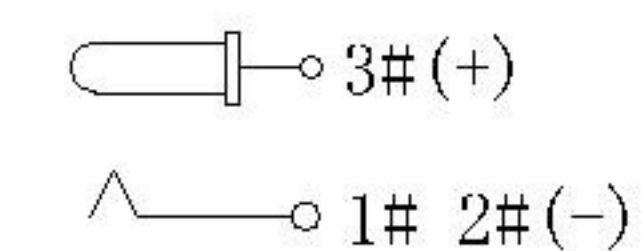

SPECIFICATION

1. Rating : DC 20V 10A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 5-40N;
6. life test: 5,000 cycles.

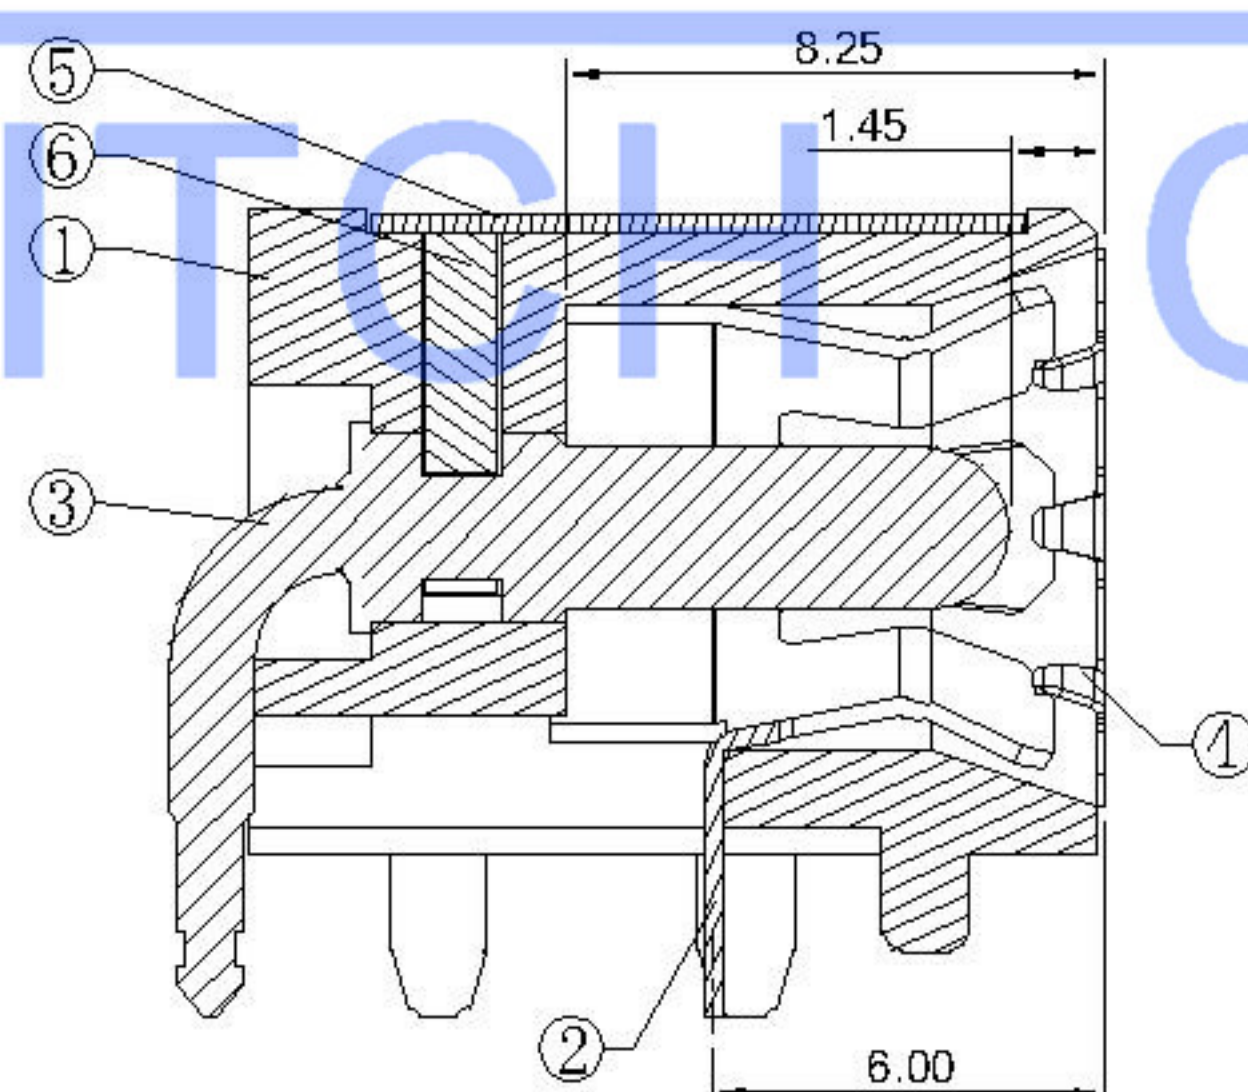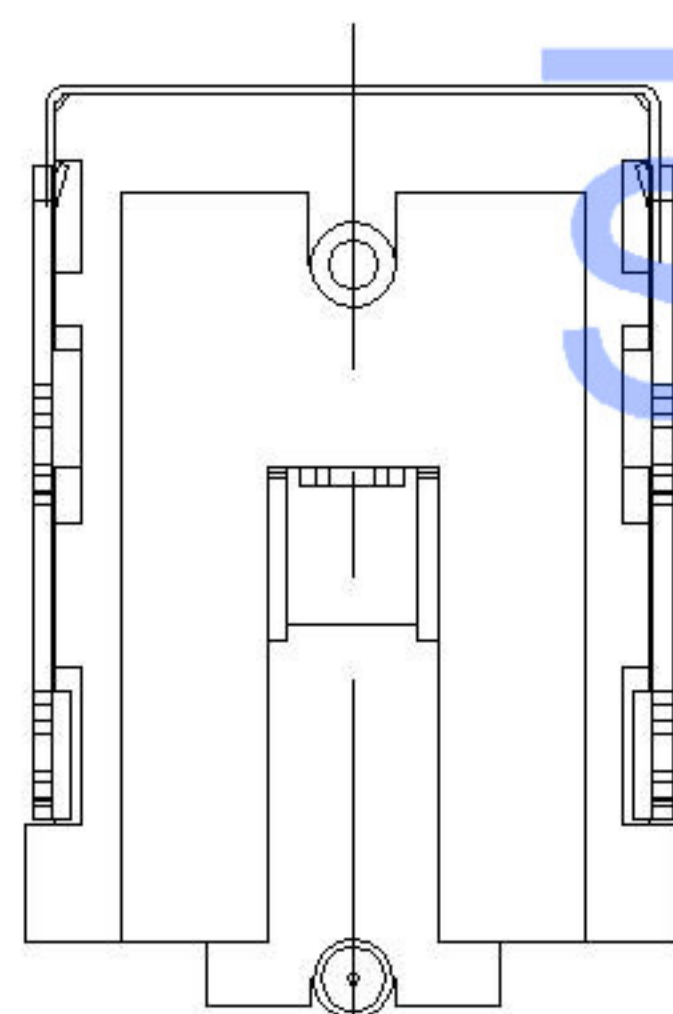

剖面 A-A

6	STOPPER	1	HIGH TEMP THERMOPLASTIC UL-94 V0	BLACK
5	SHIELD	1	SUS 0.3t	Ni60U"
4	CONTACT FOOT	1	SUS 0.15t	N/A
3	PIN	1	BRASS	Ni50U"
2	SPRING PIECE	1	C5191 0.3t	AG15U" OVER Ni50U"
1	HOUSING	1	HIGH TEMP THERMOPLASTIC UL-94 V0	BLACK
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

					DSND		DATE		SCALE: N/A	MODEL TYPE: DC POWER JACK		
					DWN		DATE		VIEW:	PART NO.:		
					CHKD		DATE		UNIT: mm	DWG NO.:		
					APPD		DATE		SIZE: A4	DC-042C-Z-2.5-A		
REVISIONS					UNSPECIFIED TOLERANCES					WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					XKB INDUSTRIAL PRECISION CO.,LIMITED					1.0g	1/1	A0