

A

B

C

D

E

F

A

B

C

D

E

F




- Specifications(规格) :
- Voltage rating(额定电压): 250V AC / DC
 - Current rating(额定电流): 3A AC / DC
 - Withstanding voltage(耐压值): 500V AC/minute
 - Temperature range(工作温度): -25°C~+85°C
 - Insulation resistance(绝缘电阻): ≥1000MΩ
 - Contact resistance(接触电阻): ≤20mΩ
 - After environmental testing(环境测试后): ≤30mΩ

X9254 H IR-XX DXX-XX XX-W

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 系列
- ② 类别:
H-HSG
- ③ 外观形态:
IR-HSG加五金件组立品(90°)
- ④ PIN数或防呆KEY形态:
单排-XX
- ⑤ 特殊码:
D22-斜角单开口、AWG#22
D24-斜角单开口、AWG#24
D26-斜角单开口、AWG#26
- ⑥ 材质:
N0-PA66 94V-0 N2-PA66 94V-2
- ⑦ 颜色:
空码-本色或普通色
- ⑧ W-ITW

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2	2.54	5.08	10	22.86	25.40
3	5.08	7.62	11	25.40	27.94
4	7.62	10.16	12	27.94	30.48
5	10.16	12.70	13	30.48	33.02
6	12.70	15.24	14	33.02	35.56
7	15.24	17.78	15	35.56	38.10
8	17.78	20.32	16	38.10	40.64
9	20.32	22.86	17	40.64	43.18

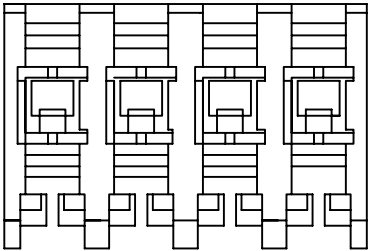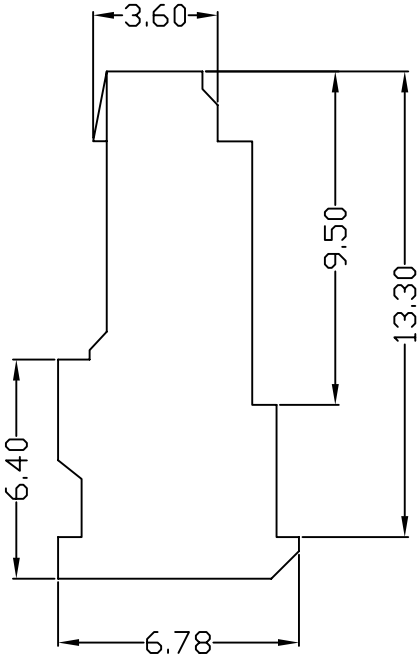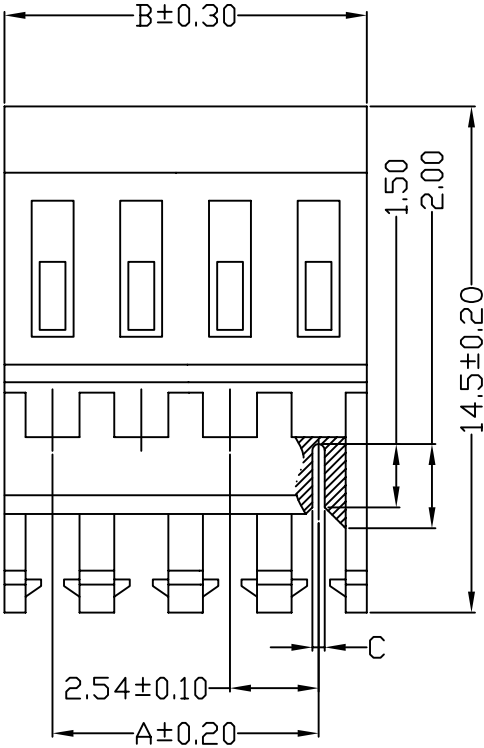

X9254HIR-XXD26-N0-W	Nylon 66 UL 94V-0	Brass	Tin-Plated	AWG#26	0.35
X9254HIR-XXD24-N0-W				AWG#24	0.45
X9254HIR-XXD22-N0-W				AWG#22	0.55
X9254HIR-XXD26-N2-W	Nylon 66 UL 94V-2				
X9254HIR-XXD24-N2-W					
X9254HIR-XXD22-N2-W					
PART NO	Material	Material(Pin)	Finish(Terminal)	Wire Range	C

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

Authorized Signature(s)

DSND		DATE		SCALE: N/A	MODEL TYPE: X9254HIR-XXDXX-XX-W
DWN		DATE		VIEW:	PART NO.: 2.54 mm Crimp Style Connectors
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0