

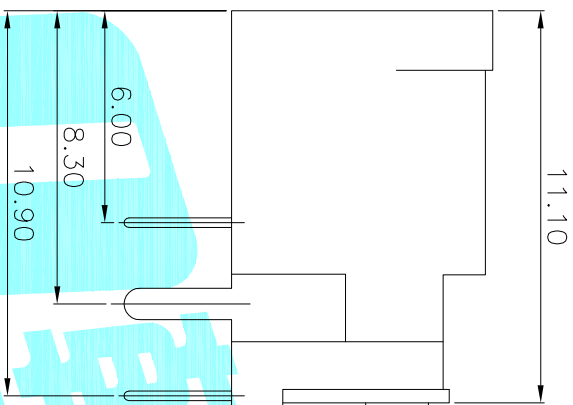
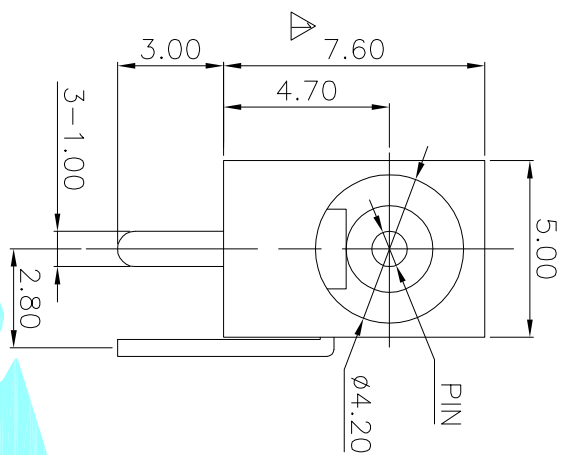


P.C.B LAYOUT(Copper-side view)

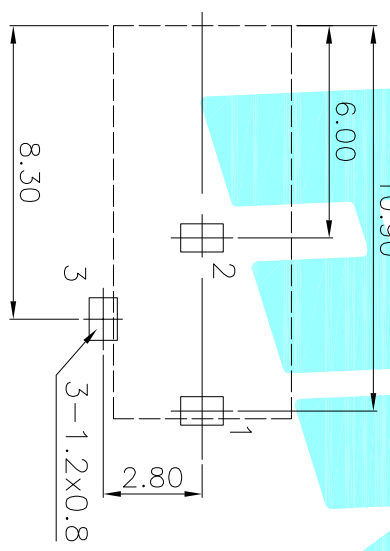

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

Model No.	1	2	3	4
PIN	φ0.65	φ1.0	φ1.3	φ1.65
DC PLUG O.D.	φ2.35	φ3.5	φ3.5	φ4.0

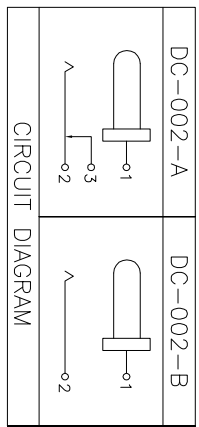

②	Terminal	—	3	Phosphor bronze	Ag Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS				DATE		
DRAWN		J.X.Zhang		2018/07/31		
CHECKED				TITLE: PHONE JACKES		
APPROVALS				PART NO. DC-002		
TOLERANCES ARE				SCALE: 1:1		
30~0.1				±0.30		
10~30				±0.20		
5~10				±0.15		
~5				±0.10		
~5				±2°		
DRAWING NO.				SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			