

规格说明 Specifications:

电气特性:Electrical:

- 1.额定电流: Current Rating
18A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触电阻: Contact Resistance
30 milliohms MAX
- 4.额定电压: Dielectric Withstanding Voltage
500 V AC AT Sea Level
- 5.绝缘电阻: Insulation Resistance:

物理性能 Mechanical:

1. 插拔力: Connector Mate and Umate Force
Mate force: 3.57kgf(MAX)
Umate force: 1.02kgf(MIN)

原材料 Material:

- ## 1. 塑胶Housing TBP 蓝胶防火:

2. 端子Contact: Copper Alloy C2680
3. 壳Shell: Copper Alloy C2680/SPCC

电镀 Finish:

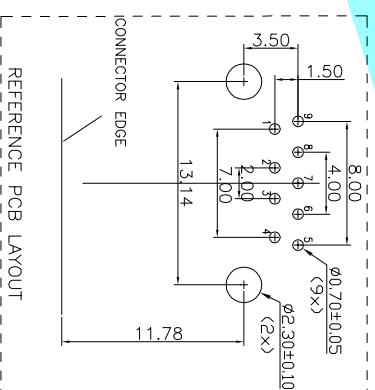



1. ~~1.4~~ Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U"(MIN)锡,镀全区域镀100-200U"镀金1U"

2. 外壳Shell:

銅壳四周鍍80U"〈MIN〉錫

Nickel Plating

[illegible]

APPROVALS		DATE		 ELECTRONICS CO.,LTD			
DRAWN	D.J.LV	2017/12/26					
CHECKED							
APPROVALS				TITLE: USB CONNECTOR			
				PART NO. U-A-39DD-Y-2			
TOLERANCES ARE		30~1.1	±0.30	ANGLE			
10~30		±0.20			UNIT: mm		
5~10		±0.15			SCALE: 1:1		
~5		±0.10	±2°		DRAWING NO.		
				PROJ. 		SHEET 1 OF	