
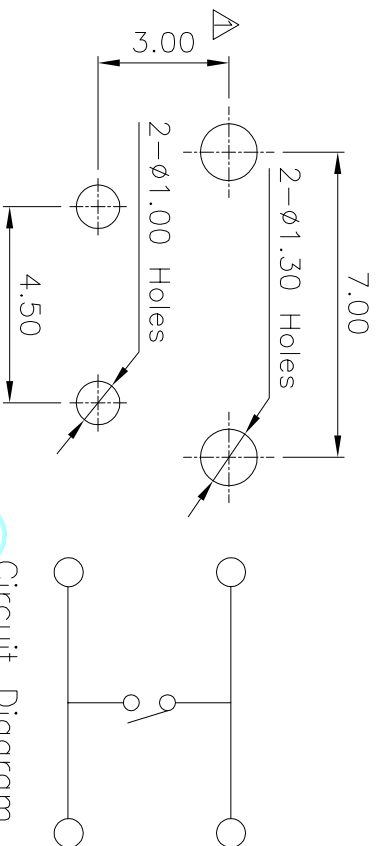


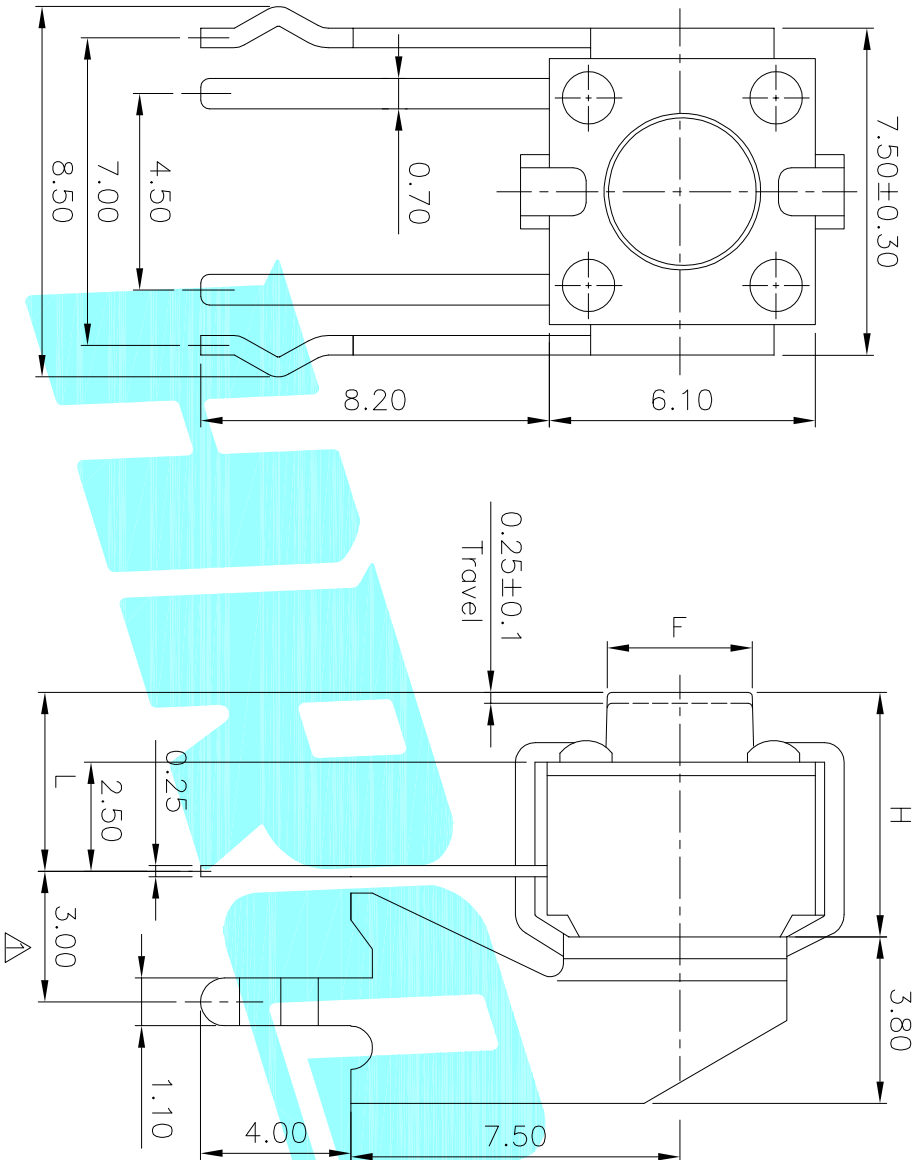

PCB Layout(Pattern side) Circuit Diagram

NO.1			
PART NO	H	L	F
A	4.3	3.30	φ3.40
C	5	4.00	φ3.40
D	5.5	4.50	φ3.40
E	6	5.00	φ3.40
F	6.5	5.50	φ3.30
G	7	6.00	φ3.30
H	7.5	6.50	φ3.30
I	8	7.00	φ3.20
J	8.5	7.50	φ3.20
K	9	8.00	φ3.20
L	9.5	8.50	φ3.20

NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.3	
PART NO	MATERIAL/QTY
S	SUS/1PC
C	C5210/1PC
D	SUS/2PCS
F	C5210/2PCS

NO.4-NO.5	
PART NO	NOTE
01~99	SERIAL NUMBER

⑥	Trestle	—	1	SPCC	Plating Nickel	—
⑤	Terminal	—	2	Brass(0.30t)	Plating silver	—
④	Contact	—	1	F.Ag/SUS	Plating silver	—
③	Base	—	1	Nylon	Black	—
②	Cover	—	1	SPCC	Plating Nickel	—
①	Keystoke	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	TITLE:			
DRAWN J.X.Zhang		2013/5/30	TACT SWITCHS			
CHECKED			ELECTRONICS CO.,LTD			
APPROVALS			PART NO. K2-1102BG-□□□□W-□□			
TOLERANCES ARE		30~0.1 10~0.20 5~0.10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE UNIT: mm SCALE: 1:1 PROJ:		
ECN NO.	REV.	DATE.	CHANGE.	CHECK.	APPRO.	SHEET 1 OF 1
	B					
	A					
DESCRIPTION. NEW						