


MAPX	MODIFICATION	DATE

- NOTES:**
- 1. HOUSING: ORANGE, UL94V-0 .
  - TERMINAL: SEE NOTES.
  - SHELL: SEE NOTES.
- SPECIFICATION:**
- 1. ELECTRICAL CHARACTERISTIC:
    - Current rating:5.0A Max
    - CONTACT RESISTANCE: 30MΩ MAX
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
    - INSULATION RESISTANCE: 1000MΩ MIN
  - 2. MECHANICAL CHARACTERISTIC:
    - INSERTION FORCE: 35N(3.57KGF) MAX
    - EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
    - DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N 5000 CYCLES MIN
    - 5000 CYCLES EXTRACTION FORCE:3~35N
  - 3. ENVIRONMENTAL:
    - OPERATING TEMPERATURE: -55℃+85℃
  - 4. Contact finish:
    - 01:Selective Gold Flash
    - 02:Selective Gold 3U"
    - 03:Selective Gold 5U"
    - 04:Selective Gold 15U"
    - 05:Selective Gold 30U"

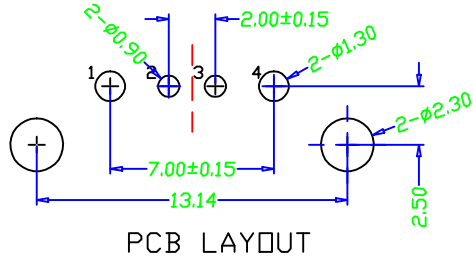

<b>产品图</b> PRODUCT CHART DWG				<b>深圳市精拓金电子有限公司</b>							
<b>公差一览表</b> TOLERANCE UNLESS OTHERWISE				<b>单位</b> UNITS	MM	<b>制图</b> DRAWING	Z-Y-B	<b>制图料号</b> PRODUCT PART NO.			
X.	±0.25	X.	±5.°	<b>比例</b> SCALE	1:1	<b>审核</b> CHKD		<b>产品名称</b> PRODUCT NO.	USB A/F 180度插板式无边 (13.1)		
.X	±0.20	.X	±2.°	<b>日期</b> DATE	2014.07.24	<b>核准</b> APPD		<b>角法</b> VIEW		<b>版本</b> VER	AD
.XX	±0.15	.XX	±1.°								
.XXX	±0.10	.XXX	±0.5°								